


LEDBARKIT-INTERNAL DRIVER (LBI) THE LINEAR TRANSFORMER



VOLTAGE
(240-347V FOR CANADA ONLY)



SENSOR READY




EFFICACY
(LIGHT ENGINE)



OPERATING TEMP



BEAM ANGLE



PWR FACTOR/THD



CRI




OPTIONAL EMG
BATTERY BACKUP



OPTIONAL
MOTION SENSOR

one light – unlimited possibilities

available
in both
BASE & PRO

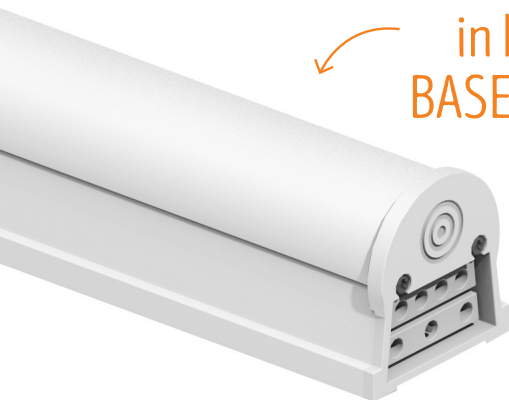

	PRO	BASE
DIMMABLE	✓ 0-10V	—
CONTROL POWER	✓ 12V	—
FLEX COLOR	✓	—
FLEX WATT	✓	—
WARRANTY	10YR	5YR
L70	>100,000 HRS	50,000 HRS

DEFAULT CONFIGURATIONS

PART #	UPC	DESCRIPTION	WATTAGE	LUMENS	LPW	CCT (K)	DLC PRODUCT CODE
RP-LBI-G1-2F-6W-27K-WC2	844006024826	2FT PRO WARM CCT INTERNAL DRIVE LIGHT BAR	6/9/12	696-1524	116-127	2700/3000/3500	
RP-LBI-G1-2F-6W-40K-WC	844006023867	2FT PRO INTERNAL DRIVE LIGHT BAR	6/9/12	780-1560	126-137	3500/4000/5000	PFLO5RPC
RP-LBI-G1-3F-10W-27K-WC2	844006024833	3FT PRO WARM CCT INTERNAL DRIVE LIGHT BAR	10/12/15	1270-1980	127-132	2700/3000/3500	
RP-LBI-G1-3F-10W-40K-WC	844006023959	3FT PRO INTERNAL DRIVE LIGHT BAR	10/12/15	1400-2100	137-142	3500/4000/5000	PTTC4A0W
RP-LBI-G1-4F-15W-27K-WC2	844006024840	4FT PRO WARM CCT INTERNAL DRIVE LIGHT BAR	10/15/25	1260-3400	126-136	2700/3000/3500	
RP-LBI-G1-4F-15W-40K-WC	844006024079	4FT PRO INTERNAL DRIVE LIGHT BAR	10/15/25	1462-3653	136-146	3500/4000/5000	PCW0MQPB
RP-LBI-G1-4F-15W-40K-B	844006024215	4FT BASE INTERNAL DRIVE LIGHT BAR	15	1996	139	4000	PMROEESV

Default settings are above. See pages 7 and 8 for additional styles, lumen packages, color temperatures and options.

POPULAR ACCESSORIES (SOLD SEPARATELY)

EMERGENCY BATTERY BACKUP	LINKING CABLES	SEAMLESS CONNECTOR	OC2 SENSOR KIT	SUSPENDED IN-LINE BRACKET KIT	INCOMING POWER KIT*

***INCOMING POWER KIT NOW SOLD SEPARATELY – SEE PAGE 3 FOR DETAILS**

(SEE PAGE 12 FOR MORE ACCESSORIES)



BAA SECTION
1605 COMPLIANT
OPTIONAL
(IF YOU REQUIRE BAA
(ARRA SECTION 1605)
ADD -AA AT END OF
PART NUMBER.)

Light Efficient Design

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

LED BARKIT-INTERNAL DRIVER (LBI) THE LINEAR TRANSFORMER



—○ Usage & Applications

One solution. ETL and DLC listed as both a retrofit kit and a fixture.

Retrofit Kit

Using the fast install magnetic brackets, light bars fit between any T5, T8 or T12 socketed fixture including

TROFFERS



Example 2x2 and 2x4 retrofitted with 3 light bars.


VAPOR TIGHT

WRAP

HIGH BAY

CONTINUOUS RUNS

UTILITY STRIP

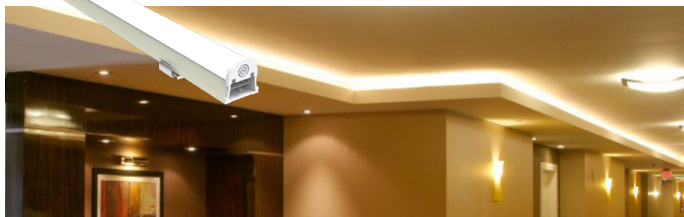

COVE LIGHTING


RETROFIT MOUNTING KITS

Mount light bar to a Retrofit Mounting Kit for a faster, cleaner install.
- contact us for details.

Fixture

ETL and DLC listed as a fixture under the following categories


STAIRWELL FIXTURE




LINEAR AMBIENT FIXTURE



HIGH BAY FIXTURE (LOW CEILING HEIGHTS)

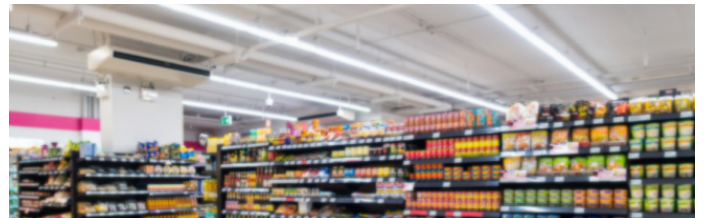

HIGH BAY FIXTURE (HIGH CEILING HEIGHTS)

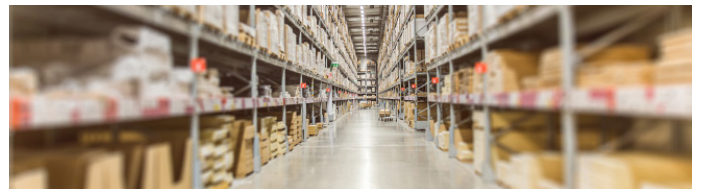

FIXTURE HOUSING KITS

Mount light bar to a Fixture Housing Kit for a faster, cleaner install.
- contact us for details.

LED BARKIT-INTERNAL DRIVER (LBI) THE LINEAR TRANSFORMER

INCLUDED WITH EVERY BAR

2X Surface Mount Magnetic Clips
(w/ easy bend and break lines)

4X 1/4" hex head-self drilling screws

1X Flex setting cover




INCOMING POWER KIT: RP-LBI-G1-IP-3F-DIM – SOLD SEPARATELY

Kit Includes:


1 Incoming power cable (bar input side)

1 Service Disconnect

1 Abrasion protection grommet

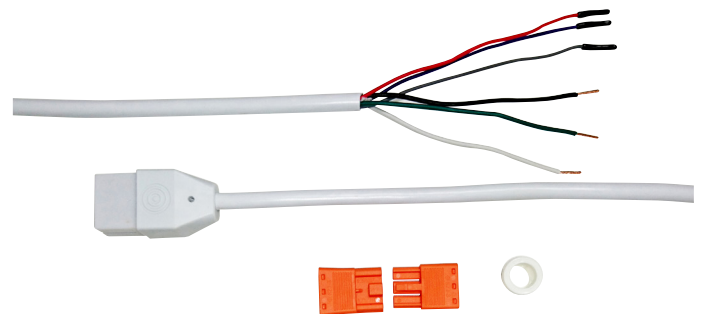

WIRING DIAGRAM

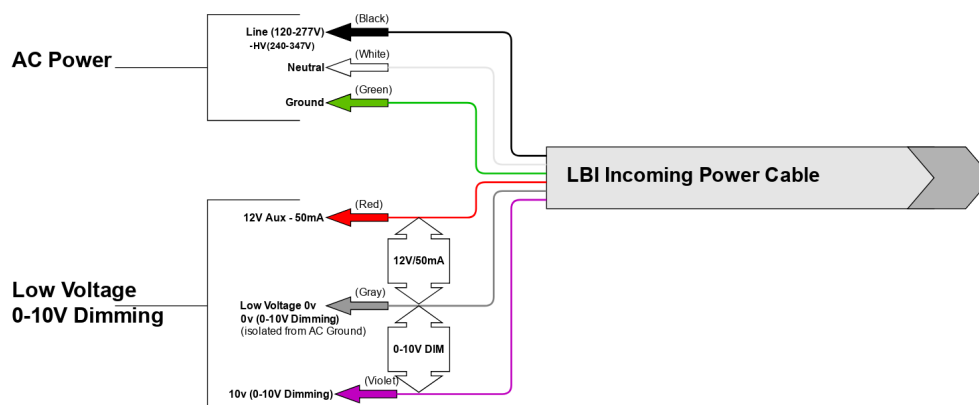


Light Efficient Design

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

—○ LEDBarKit-Internal Driver (LBI) Design Guide

A comprehensive guide to understanding, specifying, stocking, and selling the LEDBarKit-Internal Driver fluorescent replacement.



The Linear Transformer

With up to 146 lumens per watt, and up to 25 years of virtually maintenance free operation, learn why smart decision makers use the The Linear Transformer when upgrading to LED.

—○ Perfect replacement for

- Linear and general purpose
- Strips & Wraps
- Troffers
- Vapor Tights
- Low bay and High bay
- Coves and Soffits
- Stairwells



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

—○ LEDBarKit-Internal Driver (LBI)

FEATURES


The Linear Transformer is available in both BASE and PRO versions – choose which is best for you!



9 SKUs in 1 WITH FLEXWATT™
& FLEXCOLOR™ TECHNOLOGY

flexWATT	2FT	6W	9W	12W
	3FT	10W	12W	15W
	4FT	10W	15W	25W

- Eliminate ordering and stocking multiple wattages and color temperatures. Product offers 9 SKUs in 1 unit which can easily be configured to 3 different wattage packages and 3 different CCTs.

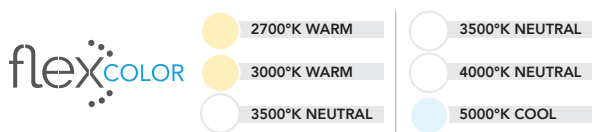

- Product ships at a default color temp (K) and wattage setting (install as is, or tailor the settings to fit your needs).
- Save on labor costs by having us factory pre-set the wattage and color temperature.

FLEXCONTROL™ TECHNOLOGY

- Order control ready or basic control (integrated high/low and daylight sensor) or advanced controls (such as, Philips Easy Sense, Avi-On Bluetooth or Lutron Vive).
- Optional sensors are directly linkable to the light bars.
- Our basic motion/daylight control (OC2 ordering code) is adjustable via remote control for (1) sensitivity (2) duration of time at high light level before dimming to low (2) duration of time at low light level before turning off (3) ramping up and down light levels based on daylight and (4) the dimmed light level %.

SUITABLE FOR DRY & DAMP LOCATIONS

PASS-THROUGH 0-10V DIMMING & AUXILIARY 12V OUTPUT

- Allows all light bars to be dimmed together as a group.

ADAPTABLE MOUNTING

- Various mounting clip options with integrated rare-earth magnets for easy placement in all style fixtures.
- High Bay pendant chain options available.

CONNECT UP TO 40 LIGHT BARS ON ONE INCOMING POWER CABLE

Up to 146 LUMENS PER WATT EFFICACY

10 YEAR WARRANTY, L70 >100,000HRS

OPTIONAL EMERGENCY BATTERY BACKUP

OPTIONAL BAA SECTION 1605

(If you require BAA (ARRA Section 1605) add
-AA at end of part number.)



SUITABLE FOR DRY & DAMP LOCATIONS

ADAPTABLE MOUNTING

- Various mounting clip options with integrated rare-earth magnets for easy placement in all style fixtures.
- High Bay pendant chain options for high bay installation.

CONNECT UP TO 40 LIGHT BARS ON ONE INCOMING POWER CABLE

139 LUMENS PER WATT EFFICACY

5 YEAR WARRANTY, L70 >50,000HRS

OPTIONAL EMERGENCY BATTERY BACKUP

OPTIONAL BAA SECTION 1605

(If you require BAA (ARRA Section 1605) add
-AA at end of part number.)




Light Efficient Design

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

LEDBarKit-Internal Driver (LBI)

FLEXWATT + FLEXCOLOR

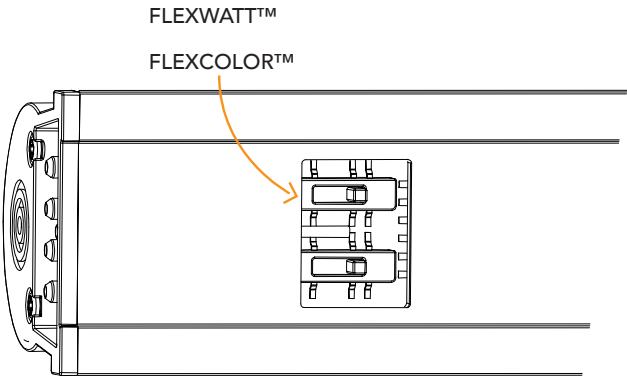

2FT	6W	9W	12W
3FT	10W	12W	15W
4FT	10W	15W	25W

HOW IT WORKS
 Our exclusive LED driver is designed to operate at 90%+ efficiency at each wattage setting. Our competitor's drivers have much lower efficiency (as low as 60%) which results in poor performance and reduced efficacy.

WATTAGE CHOICES

2FT	6W	9W	12W
3FT	10W	12W	15W
4FT	10W	15W	25W

WATTAGE SELECTION
 Adjust the 3-position slide switch, no tools required.



- 2700°K WARM
 - 3000°K WARM
 - 3500°K NEUTRAL
-
- 3500°K NEUTRAL
 - 4000°K NEUTRAL
 - 5000°K COOL

HOW IT WORKS
 We select the highest efficacy, multiple color LED diodes from quality suppliers, and mount them on the circuit board. A proprietary LED binning process ensures color consistency between fixtures. The FlexColor technology ensures the desired color is selected, every time.

COLOR CHOICES


	FLEXCOLOR SLIDE SWITCH POSITION		
	TOP	MIDDLE	BOTTOM
... -27K-WC2	2700K	3000K	3500K
... -40K-WC	3500K	4000K	5000K

COLOR SELECTION
 Adjust the 3-position slide switch, no tools required.



—○ LEDBarKit-Internal Driver (LBI)

EXPLODED CONSTRUCTION VIEW

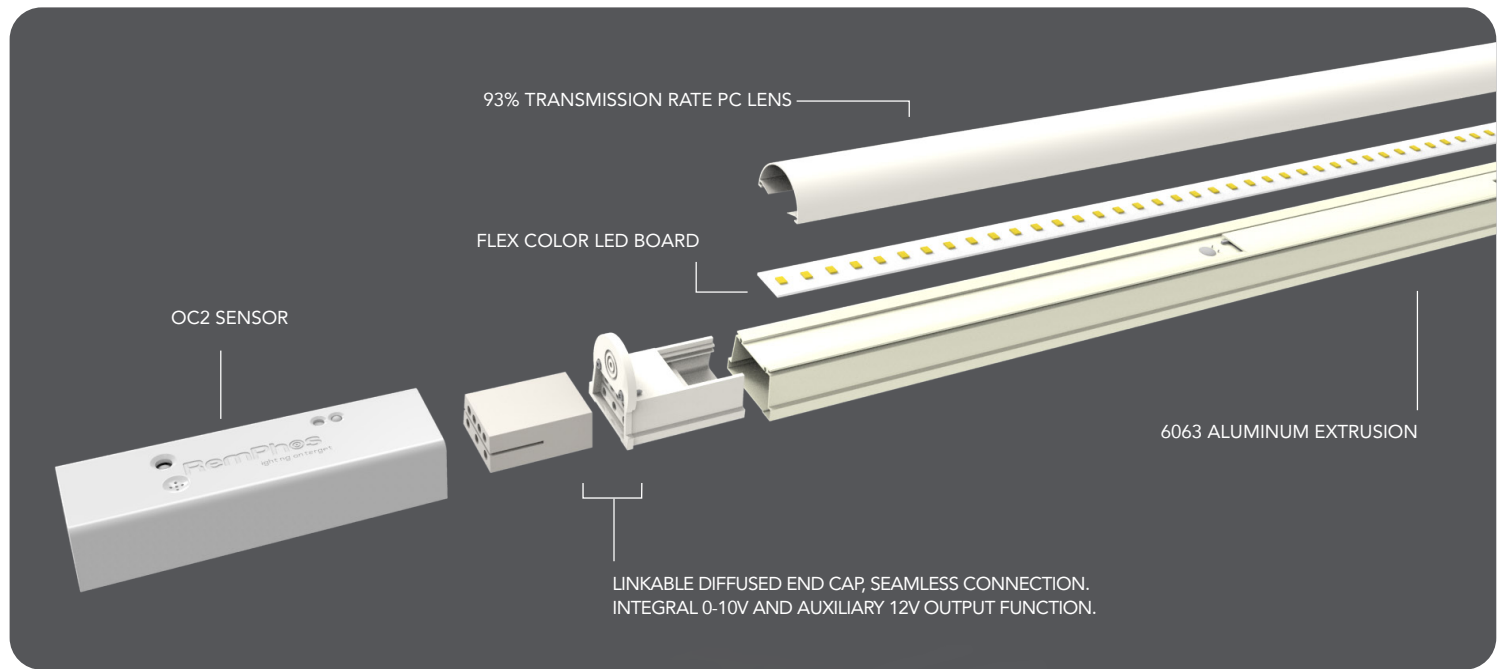


INCLUDED WITH EVERY BAR

2X Surface Mount Magnetic Clips
(w/ easy bend and break lines)

4X 1/4" hex head-self drilling screws




DIMENSIONS




19.3"

RP-LBI-G1-2F-...



31.3"

RP-LBI-G1-3F-...





43.3"

RP-LBI-G1-4F-...

Cable Dimensions

7.25mm - 0.28 Inch for DIM cable.


6.35mm - .25 inch for NO-DIM cables




Light Efficient Design

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

—○ LEDBarKit-Internal Driver (LBI)



	PART #	# of Bars	CCT Selections	Wattage Per Bar	Lumens Per Bar	Total Wattage	Total Lumens	Linear Ambient		High Bay		Linear Ambient		Towers		Standard/Premium	
								DLC/QPL (FIXTURE)		DLC/QPL (RETROFIT)		DLC/QPL (FIXTURE)		DLC/QPL (RETROFIT)		DLC/QPL (FIXTURE)	
PRO 1X BAR KITS	2FT	RP-LBI-G1-2F-6W-XXK-WC2-AA	1	27K/30K/35K	6	700	6	700	PO6968KO							S	
		RP-LBI-G1-2F-6W-XXK-WC2-HV-AA	1	27K/30K/35K	6	700	6	700	PRWUJ698							S	
		RP-LBI-G1-2F-6W-XXK-WC-AA	1	35K/40K/50K	6	770	6	770	PFL05RCP							P	
		RP-LBI-G1-2F-6W-XXK-WC-HV-AA	1	35K/40K/50K	6	770	6	770	PGHKU1Q							P	
		RP-LBI-G1-2F-9W-XXK-WC2-AA	1	27K/30K/35K	9	1120	9	1120	PRZ7TY9							S	
		RP-LBI-G1-2F-9W-XXK-WC2-HV-AA	1	27K/30K/35K	9	1120	9	1120	P22HG6PP							S	
		RP-LBI-G1-2F-9W-XXK-WC-AA	1	35K/40K/50K	9	1285	9	1285	P56G7BMO							P	
		RP-LBI-G1-2F-9W-XXK-WC-HV-AA	1	35K/40K/50K	9	1285	9	1285	PUQX9WLZ							P	
		RP-LBI-G1-2F-12W-XXK-WC2-AA	1	27K/30K/35K	12	1480	12	1480	PTIHZNCJ							S	
		RP-LBI-G1-2F-12W-XXK-WC2-HV-AA	1	27K/30K/35K	12	1480	12	1480	P1G3Q32M							S	
	3FT	RP-LBI-G1-2F-12W-XXK-WC-AA	1	35K/40K/50K	12	1600	12	1600	P5ZAPJNF							P	
		RP-LBI-G1-2F-12W-XXK-WC-HV-AA	1	35K/40K/50K	12	1600	12	1600	P9BN5JTA							P	
		RP-LBI-G1-3F-10W-XXK-WC2-AA	1	27K/30K/35K	10	1268	10	1268	PQ9EOKA7							S	
		RP-LBI-G1-3F-10W-XXK-WC2-HV-AA	1	27K/30K/35K	10	1268	10	1268	PCKK6TR1							S	
		RP-LBI-G1-3F-10W-XXK-WC-AA	1	35K/40K/50K	10	1434	10	1434	PTTC4AOW							P	
		RP-LBI-G1-3F-10W-XXK-WC-HV-AA	1	35K/40K/50K	10	1434	10	1434	PHF5Y0NJ							P	
		RP-LBI-G1-3F-12W-XXK-WC2-AA	1	27K/30K/35K	12	1522	12	1522	PN2DTHBC							S	
		RP-LBI-G1-3F-12W-XXK-WC2-HV-AA	1	27K/30K/35K	12	1522	12	1522	P1566SK7							S	
		RP-LBI-G1-3F-12W-XXK-WC-AA	1	35K/40K/50K	12	1761	12	1761	PO7I0R7							P	
		RP-LBI-G1-3F-12W-XXK-WC-HV-AA	1	35K/40K/50K	12	1761	12	1761	PLUPBLEO							P	
PRO 2X BAR KITS	4FT	RP-LBI-G1-3F-15W-XXK-WC2-AA	1	27K/30K/35K	15	1855	15	1855	PNLFMSKR							S	
		RP-LBI-G1-3F-15W-XXK-WC2-HV-AA	1	27K/30K/35K	15	1855	15	1855	P217F6LD							S	
		RP-LBI-G1-3F-15W-XXK-WC-AA	1	35K/40K/50K	15	2000	15	2000	PFDO86O2							P	
		RP-LBI-G1-3F-15W-XXK-WC-HV-AA	1	35K/40K/50K	15	2000	15	2000	PDWN1BQN							P	
		RP-LBI-G1-4F-10W-XXK-WC2-AA	1	27K/30K/35K	10	1265	10	1265	P44Q5KF3							S	
		RP-LBI-G1-4F-10W-XXK-WC2-HV-AA	1	27K/30K/35K	10	1265	10	1265	PHWIH7LZ							S	
		RP-LBI-G1-4F-10W-XXK-WC-AA	1	35K/40K/50K	10	1462	10	1462	PP90LGJ3							P	
		RP-LBI-G1-4F-10W-XXK-WC-HV-AA	1	35K/40K/50K	10	1462	10	1462	PWCY774Y							P	
		RP-LBI-G1-4F-15W-XXK-WC2-AA	1	27K/30K/35K	15	1895	15	1895	P84SKJGB							S	
		RP-LBI-G1-4F-15W-XXK-WC2-HV-AA	1	27K/30K/35K	15	1895	15	1895	PKFB5LA2							S	
	2FT	RP-LBI-G1-4F-15W-XXK-WC-AA	1	35K/40K/50K	15	2130	15	2130	PCW0MOPB							P	
		RP-LBI-G1-4F-15W-XXK-WC-HV-AA	1	35K/40K/50K	15	2130	15	2130	POO3BOVK							P	
		RP-LBI-G1-4F-25W-XXK-WC2-BAA	1	27K/30K/35K	25	3160	25	3160	PL1A1TE9							S	
		RP-LBI-G1-4F-25W-XXK-WC2-HV-BAA	1	27K/30K/35K	25	3160	25	3160	PUPEQU7Y							S	
		RP-LBI-G1-4F-25W-XXK-WC-AA	1	35K/40K/50K	25	3650	25	3650	PRNWHBGQ							P	
		RP-LBI-G1-4F-25W-XXK-WC-HV-AA	1	35K/40K/50K	25	3650	25	3650	PF5N7WFD							P	
		RP-LBI-G1-2F-6W-XXK-WC2-AA-2X	2	27K/30K/35K	6	700	12	1400									
		RP-LBI-G1-2F-6W-XXK-WC2-HV-AA-2X	2	27K/30K/35K	6	700	12	1400									
		RP-LBI-G1-2F-6W-XXK-WC-AA-2X	2	35K/40K/50K	6	770	12	1540				PWK6HRMR				P	
		RP-LBI-G1-2F-6W-XXK-WC-HV-AA-2X	2	35K/40K/50K	6	770	12	1540									
		RP-LBI-G1-2F-9W-XXK-WC2-AA-2X	2	27K/30K/35K	9	1120	18	2240									
	3FT	RP-LBI-G1-2F-9W-XXK-WC2-HV-AA-2X	2	27K/30K/35K	9	1120	18	2240									
		RP-LBI-G1-2F-9W-XXK-WC-AA-2X	2	35K/40K/50K	9	1285	18	2570				P548I2GR				P	
		RP-LBI-G1-2F-9W-XXK-WC-HV-AA-2X	2	35K/40K/50K	9	1285	18	2570									
		RP-LBI-G1-2F-12W-XXK-WC2-AA-2X	2	27K/30K/35K	12	1480	24	2960									
		RP-LBI-G1-2F-12W-XXK-WC2-HV-AA-2X	2	27K/30K/35K	12	1480	24	2960									
		RP-LBI-G1-2F-12W-XXK-WC-AA-2X	2	35K/40K/50K	12	1600	24	3200				PZTJD3B3				P	
		RP-LBI-G1-2F-12W-XXK-WC-HV-AA-2X	2	35K/40K/50K	12	1600	24	3200									
		RP-LBI-G1-3F-10W-XXK-WC2-AA-2X	2	27K/30K/35K	10	1268	20	2536									
		RP-LBI-G1-3F-10W-XXK-WC2-HV-AA-2X	2	27K/30K/35K	10	1268	20	2536									
		RP-LBI-G1-3F-10W-XXK-WC-AA-2X	2	35K/40K/50K	10	1434	20	2868									
	4FT	RP-LBI-G1-3F-10W-XXK-WC-HV-AA-2X	2	35K/40K/50K	10	1434	20	2868									
		RP-LBI-G1-3F-12W-XXK-WC2-AA-2X	2	27K/30K/35K	12	1522	24	3044									
		RP-LBI-G1-3F-12W-XXK-WC2-HV-AA-2X	2	27K/30K/35K	12	1522	24	3044									
		RP-LBI-G1-3F-12W-XXK-WC-AA-2X	2	35K/40K/50K	12	1761	24	3522									
		RP-LBI-G1-3F-12W-XXK-WC-HV-AA-2X	2	35K/40K/50K	12	1761	24	3522									
		RP-LBI-G1-3F-15W-XXK-WC2-AA-2X	2	27K/30K/35K	15	1855	30	3710									
		RP-LBI-G1-3F-15W-XXK-WC2-HV-AA-2X	2	27K/30K/35K	15	1855	30	3710									
		RP-LBI-G1-3F-15W-XXK-WC-AA-2X	2	35K/40K/50K	15	2000	30	4000									
		RP-LBI-G1-3F-15W-XXK-WC-HV-AA-2X	2	35K/40K/50K	15	2000	30	4000									
		RP-LBI-G1-4F-10W-XXK-WC2-AA-2X	2	27K/30K/35K	10	1265	20	2530									
		RP-LBI-G1-4F-10W-XXK-WC2-HV-AA-2X	2	27K/30K/35K	10	1265	20	2530									
		RP-LBI-G1-4F-10W-XXK-WC-AA-2X	2	35K/40K/50K	10	1462	20	2924				PW55YB2M		PETOVYMS		P	
		RP-LBI-G1-4F-10W-XXK-WC-HV-AA-2X	2	35K/40K/50K	10	1462	20	2924									
		RP-LBI-G1-4F-15W-XXK-WC2-AA-2X	2	27K/30K/35K	15	1895	30	3790									
		RP-LBI-G1-4F-15W-XXK-WC2-HV-AA-2X	2	27K/30K/35K	15	1895	30	3790									
		RP-LBI-G1-4F-15W-XXK-WC-AA-2X	2	35K/40K/50K	15	2130	30	4260				P08WGV0G		P3N42A27		P	
		RP-LBI-G1-4F-15W-XXK-WC-HV-AA-2X	2	35K/40K/50K	15	2130	30	4260									
		RP-LBI-G1-4F-25W-XXK-WC2-AA-2X	2	27K/30K/35K	25	3160	50	6320									
		RP-LBI-G1-4F-25W-XXK-WC2-HV-AA-2X	2	27K/30K/35K	25	3160	50	6320									
		RP-LBI-G1-4F-25W-XXK-WC-AA-2X	2	35K/40K/50K	25	3650	50	7300				P5FLB42B					
		RP-LBI-G1-4F-25W-XXK-WC-HV-AA-2X	2	35K/40K/50K	25	3650	50	7300									



All models on the DLC QPL are premium listed.

 **Light Efficient Design**

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

— LEDBarKit-Internal Driver (LBI)

PRODUCT SELECTION GUIDE (CONTINUED)

Default lumen package (wattage and CCT) are shown below in **bold**. There are two ways to achieve a non-default lumen package and/or CCT:

1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

		# of Bars	CCT Selections	Wattage Per Bar	Lumens Per Bar	Total Wattage	Total Lumens	Linear Ambient	High-Bay	Linear Ambient	Troffers	Standard Premium	
PART #								DLC/OPL (FIXTURE)		DLC/OPL (RETROFIT)			
PRO 2X BAR KITS	4FT	RP-LBI-G1-4F-10W-DOXK-WC2-AA-2X	2	27K/30K/35K	10	1265	20	2530					
		RP-LBI-G1-4F-10W-DOXK-WC2-HV-AA-2X	2	27K/30K/35K	10	1265	20	2530					
		RP-LBI-G1-4F-10W-DOXK-WC-AA-2X	2	35K/40K/50K	10	1462	20	2924	PKYU7Y7Y		PW55YB2M	PET0VYMS	P
		RP-LBI-G1-4F-10W-DOXK-WC-HV-AA-2X	2	35K/40K/50K	10	1462	20	2924					
		RP-LBI-G1-4F-15W-DOXK-WC2-AA-2X	2	27K/30K/35K	15	1895	30	3790					
		RP-LBI-G1-4F-15W-DOXK-WC2-HV-AA-2X	2	27K/30K/35K	15	1895	30	3790					
		RP-LBI-G1-4F-15W-DOXK-WC-AA-2X	2	35K/40K/50K	15	2130	30	4260			P08WGV0G	P3N42A27	P
		RP-LBI-G1-4F-15W-DOXK-WC-HV-AA-2X	2	35K/40K/50K	15	2130	30	4260					
		RP-LBI-G1-4F-25W-DOXK-WC2-AA-2X	2	27K/30K/35K	25	3160	50	6320					
		RP-LBI-G1-4F-25W-DOXK-WC2-HV-AA-2X	2	27K/30K/35K	25	3160	50	6320					
		RP-LBI-G1-4F-25W-DOXK-WC-AA-2X	2	35K/40K/50K	25	3650	50	7300			P5FLB42B	P0359DLK	P
		RP-LBI-G1-4F-25W-DOXK-WC-HV-AA-2X	2	35K/40K/50K	25	3650	50	7300					
PRO 3X BAR KITS	2FT	RP-LBI-G1-2F-6W-DOXK-WC2-AA-3X	3	27K/30K/35K	6	700	18	2100					
		RP-LBI-G1-2F-6W-DOXK-WC2-HV-AA-3X	3	27K/30K/35K	6	700	18	2100					
		RP-LBI-G1-2F-6W-DOXK-WC-AA-3X	3	35K/40K/50K	6	770	18	2310					
		RP-LBI-G1-2F-6W-DOXK-WC-HV-AA-3X	3	35K/40K/50K	6	770	18	2310					
		RP-LBI-G1-2F-9W-DOXK-WC2-AA-3X	3	27K/30K/35K	9	1120	27	3360					
		RP-LBI-G1-2F-9W-DOXK-WC2-HV-AA-3X	3	27K/30K/35K	9	1120	27	3360					
		RP-LBI-G1-2F-9W-DOXK-WC-AA-3X	3	35K/40K/50K	9	1285	27	3855					
		RP-LBI-G1-2F-9W-DOXK-WC-HV-AA-3X	3	35K/40K/50K	9	1285	27	3855					
		RP-LBI-G1-2F-12W-DOXK-WC2-AA-3X	3	27K/30K/35K	12	1480	36	4440					
		RP-LBI-G1-2F-12W-DOXK-WC2-HV-AA-3X	3	27K/30K/35K	12	1480	36	4440					
		RP-LBI-G1-2F-12W-DOXK-WC-AA-3X	3	35K/40K/50K	12	1600	36	4800					
		RP-LBI-G1-2F-12W-DOXK-WC-HV-AA-3X	3	35K/40K/50K	12	1600	36	4800					
	3FT	RP-LBI-G1-3F-10W-DOXK-WC2-AA-3X	3	27K/30K/35K	10	1268	30	3804					
		RP-LBI-G1-3F-10W-DOXK-WC2-HV-AA-3X	3	27K/30K/35K	10	1268	30	3804					
		RP-LBI-G1-3F-10W-DOXK-WC-AA-3X	3	35K/40K/50K	10	1434	30	4302					
		RP-LBI-G1-3F-10W-DOXK-WC-HV-AA-3X	3	35K/40K/50K	10	1434	30	4302					
		RP-LBI-G1-3F-12W-DOXK-WC2-AA-3X	3	27K/30K/35K	12	1522	36	4566					
		RP-LBI-G1-3F-12W-DOXK-WC2-HV-AA-3X	3	27K/30K/35K	12	1522	36	4566					
		RP-LBI-G1-3F-12W-DOXK-WC-AA-3X	3	35K/40K/50K	12	1761	36	5283					
		RP-LBI-G1-3F-12W-DOXK-WC-HV-AA-3X	3	35K/40K/50K	12	1761	36	5283					
		RP-LBI-G1-3F-15W-DOXK-WC2-AA-3X	3	27K/30K/35K	15	1855	45	5565					
		RP-LBI-G1-3F-15W-DOXK-WC2-HV-AA-3X	3	27K/30K/35K	15	1855	45	5565					
		RP-LBI-G1-3F-15W-DOXK-WC-AA-3X	3	35K/40K/50K	15	2000	45	6000					
		RP-LBI-G1-3F-15W-DOXK-WC-HV-AA-3X	3	35K/40K/50K	15	2000	45	6000					
4FT	RP-LBI-G1-4F-10W-DOXK-WC2-AA-3X	3	27K/30K/35K	10	1265	30	3795						
	RP-LBI-G1-4F-10W-DOXK-WC2-HV-AA-3X	3	27K/30K/35K	10	1265	30	3795						
	RP-LBI-G1-4F-10W-DOXK-WC-AA-3X	3	35K/40K/50K	10	1462	30	4386		PK6W04ZH			P	
	RP-LBI-G1-4F-10W-DOXK-WC-HV-AA-3X	3	35K/40K/50K	10	1462	30	4386						
	RP-LBI-G1-4F-15W-DOXK-WC2-AA-3X	3	27K/30K/35K	15	1895	45	5685						
	RP-LBI-G1-4F-15W-DOXK-WC2-HV-AA-3X	3	27K/30K/35K	15	1895	45	5685						
	RP-LBI-G1-4F-15W-DOXK-WC-AA-3X	3	35K/40K/50K	15	2130	45	6390		PMR4JXB6			P	
	RP-LBI-G1-4F-15W-DOXK-WC-HV-AA-3X	3	35K/40K/50K	15	2130	45	6390						
	RP-LBI-G1-4F-25W-DOXK-WC2-AA-3X	3	27K/30K/35K	25	3160	75	9480						
	RP-LBI-G1-4F-25W-DOXK-WC2-HV-AA-3X	3	27K/30K/35K	25	3160	75	9480						
	RP-LBI-G1-4F-25W-DOXK-WC-AA-3X	3	35K/40K/50K	25	3650	75	10950			P8M1MF5Q		P	
	RP-LBI-G1-4F-25W-DOXK-WC-HV-AA-3X	3	35K/40K/50K	25	3650	75	10950						



To order for continuous runs, please order "1 Bar Kits" + required accessory connectors (sold separately).
Connect up to 40 light bars on one incoming power cable.

All models on the DLC QPL are premium listed.

BASE VERSION (4FT, 1X BAR KIT) - 15W ONLY

PART #	UPC	DESCRIPTION	WATTAGE	LUMENS	LPW	CCT (K)	DLC PRODUCT CODE
RP-LBI-G1-4F-15W-40K-B	844006024215	4FT BASE INTERNAL DRIVE LIGHT BAR	15	1996	139	4000	PMROEESV

STAIRWELL FIXTURE

PART #	UPC	DESCRIPTION	WATTAGE	LUMENS	LPW	CCT (K)	DLC PRODUCT CODE
RP-LBI-G1-2F-12W-40K-W-OC2	844006024505	2FT INTERNAL DRIVE LIGHT BAR STAIRWELL KIT	12	1560	130	4000	P3QQVAJH
RP-LBI-G1-4F-15W-40K-W-OC2	844006024512	4FT INTERNAL DRIVE LIGHT BAR STAIRWELL KIT	15	2055	137	4000	PS1Q17X9

Kit comes with 1X light Bar + OC2 Motion Sensor Kit.



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com


—○ LEDBarKit-Internal Driver (LBI)

APPLICATION TABLE OF CONTENTS


PARTS & ACCESSORIES	PAGE 13-14
RETROFIT TROFFERS	PAGE 16
RETROFIT LINEAR FIXTURES	PAGE 17
CONTINUOUS RUN FIXTURES / RETROFIT	PAGE 18
HIGH BAY FIXTURE / RETROFIT	PAGE 19
STAIRWELL FIXTURE KIT / UTILITY FIXTURE.....	PAGE 20

IMPORTANT NOTE ON WIRING METHOD


As you will see on the following pages, there are many possible uses for The Linear Transformer. If your application calls for multiple light bars in a single fixture, there are 2 possible ways to order and wire (see below).



PARALLEL
Multiple incoming power cables can be grouped together under the ballast cover to make connection to incoming power and controls.



SERIES (WITH LINKING CABLE)
This method is the fastest. The first light bar uses an incoming power cable, additional light bars are linked using “linking cables” which are available in a variety of lengths. Linking cable are sold separately.



SERIES (WITH SEAMLESS CONNECTOR)
This method provides a near seamless appearance between the bars. The first light bar uses an incoming power cable, additional light bars are linked using “seamless connectors” which are sold separately.

RP-LBI-EMG1-25W (SINGLE FLEX)

RP-LBI-EMG2-25W (DUAL FLEX)

PRODUCT DESCRIPTION

The EMG-H Series LED emergency drivers are UL Listed for factory or field installation, unrivaled emergency solutions for LED product with internal driver. It allows the same LED luminaire to be used for normal and emergency operation and works in conjunction with an AC LED driver that convert new or existing LED fixtures into emergency lighting. It includes a long-life recyclable Lithium battery, and is backed by a 5-Year Warranty.

OPERATION

When AC power fails, The EM-H Series emergency LED driver immediately switches to the emergency mode, operating the LEDs at full lumen output for a minimum of 90 minutes (25W max load). When AC power is restored, the emergency driver automatically returns to the charging mode.

FEATURES

- 1. Long life recyclable Lithium battery.
- 2. Integration of test switch and charge indicator.
- 3. Used for exterior or interior of luminaire.
- 4. The power of LED luminaire < power of emergency driver.

MOUNTING CONFIGURATION:

RP-LBI-EMG1-25W Single Flex (Standard Version)


Mounts to the junction box and provides flexible conduit for remote mounting of the test accessories.

RP-LBI-EMG2-25W Dual Flex (Optional)

Provides dual flex for wiring to both fixture or driver compartment and test accessories

TYPICAL WIRING DIAGRAM

(Must connect DIM circuit from EM unit to LBI)

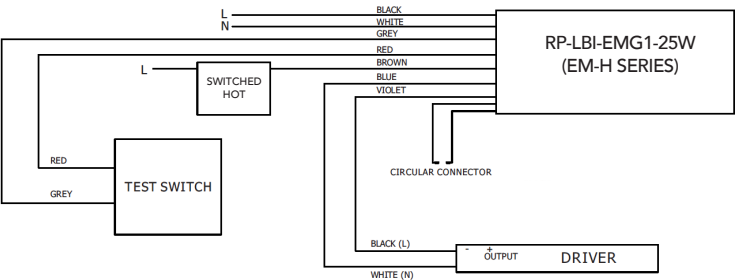


EM-H Series

UL Listed LED Emergency Driver

Unrivaled emergency solutions for LED Products with Internal drivers



DIMENSIONS

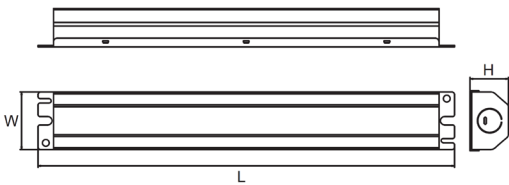

MODEL	L	W	H
EM-H25170-XX	17.14"	2.13"	1.57"

RP-LBI-EMG1-25W (EM-H25170-XX)



Output Power
25 Watts (Max Load)
Output Voltage
170V DC
Input Current
60 mA (Max)
Input Power
8 Watts (Max)
Input Volatage
120-277VAC, 50-60Hz
Emergency Operation
>90 Minutes
Operating Temp
0° to 50°C
Battery
Lithium
Recharge
36 Hrs
Dimensions
L 17.14' X W 2.13" X H 1.57"



RP-LBI-EMG2-8W-DIM (LINKABLE UP TO 60W OF LBI)

RP-LBI-EMG2-25W-DIM (LINKABLE UP TO 300W OF LBI)

PRODUCT DESCRIPTION

The EMG-H Series LED emergency drivers are UL Listed for factory or field installation, unrivaled emergency solutions for LED product with Internal driver. It allows the same LED luminaire to be used for normal and emergency operation and works in conjunction with an AC LED driver that convert new or existing LED fixtures into emergency lighting. It includes a long-life recyclable Lithium battery, and is backed by a 5-Year Warranty.

OPERATION

When AC power fails, The EM-H Series emergency LED driver immediately switches to the emergency mode for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to the charging mode.

FEATURES

- 1. Long life recyclable Lithium battery.
- 2. Integration of test switch and charge indicator.
- 3. Used for exterior or interior of luminaire.
- 4. 8W version, load up to 100W w/dim control
25W version, load up to 300W w/dim control

MOUNTING CONFIGURATION: DUAL FLEX


RP-LBI-EMG2-8W-DIM
RP-LBI-EMG2-25W-DIM

Mounts to the junction box and provides flexible conduit for remote mounting of the test accessories.



TYPICAL WIRING DIAGRAM


(Must connect DIM circuit from EM unit to LBI)

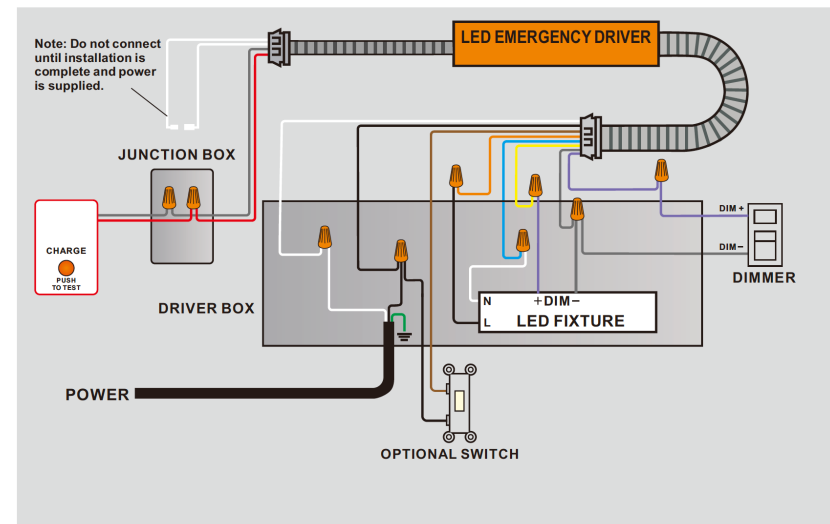

EM-H Series

UL Listed LED Emergency Driver

Unrivaled emergency solutions for LED Products with Internal drivers



MODEL	L	W	H
RP-LBI-EMG2-8W-DIM	12.76"	2.13"	1.57"
RP-LBI-EMG2-25W-DIM	15.40"	2.13"	1.57"

RP-LBI-EMG2-8W-DIM (EM-H08170-LBF) RP-LBI-EMG2-25W-DIM (EM-H25170-LBF)


Output Power
8 Watts
Output Voltage
170V DC
Input Current
70 mA (Max)
Input Power
3.2 Watts (Max)
Input Volatage
100-277VAC, 50-60Hz
Emergency Operation
>90 Minutes
Operating Temp
0° to 50°C
Battery
Lithium
Recharge
24 Hrs
Luminaire Load Power
100W (Max)
Certificates
UL , CEC

Output Power
25 Watts
Output Voltage
170V DC
Input Current
110 mA (Max)
Input Power
6 Watts (Max)
Input Volatage
120-277VAC, 50-60Hz
Emergency Operation
>90 Minutes
Operating Temp
0° to 50°C
Battery
Lithium
Recharge
36 Hrs
Luminaire Load Power
300W (Max)
Certificates
UL , CEC



—○ LEDBarKit-Internal Driver (LBI)

PARTS & ACCESSORIES




LINKING CABLES

RP-LBI-LC-6IN-DIM-10P
RP-LBI-LC-6IN-NODIM-10P

RP-LBI-LC-12IN-DIM-10P
RP-LBI-LC-12IN-NODIM-10P

RP-LBI-LC-18IN-DIM-10P
RP-LBI-LC-18IN-NODIM-10P

INCOMING POWER KIT: RP-LBI-G1-IP-3F-DIM

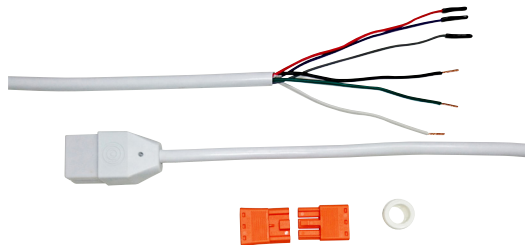

DIM



SEAMLESS CONNECTOR

RP-LBI-SSC-DIM-10P
RP-LBI-SSC-NODIM-10P

NO-DIM



LINKING CABLES & SEAMLESS CONNECTORS

Use Linking Cables and Seamless Connectors to easily connect the power and control wires from one light bar to another. The ...-DIM version of the linking cables and seamless connector link all connections (AC power; 12V Aux power; 0-10V DIM signal) from light bar to light bar. Use these items to control all light bars from one sensor or incoming cable connection. The ...-NODIM version of these items only links the AC power. Use these items to AC power all light bars with a single power feed; but separate control signals into individual groups.



4.7IN SPACER CONNECTOR | RP-LBI-SRC-4.7IN (SINGLE PACK)

Use the 4.7in Spacer Connector to bring the length of the bar system to a standard dimension (24in, 36in, 48in). This is useful when retrofitting linear fixtures of a standard length. It allows for the bar to be centered on each standard-length fixture. Each 4.7in spacer connector comes with (2) Seamless Connector-DIM.

***Note: spacer does not emit light**



SENSOR KITS | RP-LBI-OC2-A (STANDARD RANGE - SINGLE PACK) RP-LBI-OC3-A_LR (LIMITED RANGE - SINGLE PACK)

Sensors kits for LBI are Tri-Level, remote controllable high frequency radar sensor designed to easily integrate with the LBI bars. It is totally plug&play! It can dim the light bars down to conserve more energy from both motion and daylight. The sensor controls the 0-10V DIM signal in both directions from the Sensor unit. Each sensor kit comes with (1) sensor (4.7 inch); (1) surface mount magnetic clip; (2) Seamless Connector-DIM; (1) 12" Linking Cable-DIM. See **RP-LBI-OC2-A/OC3-A** data sheet for more details.



SURFACE MOUNT MAGNETIC CLIP | RP-LBI-SMM-10P (10 PACK ONLY)

The Surface Mount Magnetic Clip provides the most universal method for attaching the light bar to a wall, ceiling, or fixture to be retrofitted. The mounting tabs that extend perpendicularly from the light bar can be easily removed by bending and breaking on the pre-scored line. The strong rare-earth magnets are intended to hold light bars in place while installing mechanical fasteners. Not intended for permanent installation with magnets only.

Two of these clips are included in each light bar kit.



SUSPENDED IN-LINE KIT | RP-LBI-SIL-KIT-10P (10 PACK ONLY)

The Suspended In-Line Kit includes everything needed to suspend LBI from the ceiling.

The complete kit includes: Suspended In-Line Bracket, Aircraft Cable (9.8ft), Adjustable cable gripper, and a ceiling anchor.




SUSPENDED IN-LINE BRACKET (*BRACKET ONLY*) | RP-LBI-SIL-BRACKET-10P (10 PACK ONLY)

The Suspended In-Line Bracket (bracket only) is a wide clip that fastens over the junction between 2 LBI light bars to keep them straight in-line and provides mounting points for common suspension methods (air craft cable, drop chain, etc.) This part number is for the bracket only.

—○ LEDBarKit-Internal Driver (LBI)

PARTS & ACCESSORIES



T-BAR CLIPS

RP-LBI-T1516-10P (PARALLEL – DIRECTLY UNDER THE T-BAR – 10 PACK)
RP-LBI-T1516-90-10P (PERPENDICULAR – ACROSS THE BAR – 10 PACK)

The T-Bar Clips is the fastest way to mount a light bar to a T-Bar grid ceiling. Works with standard 15/16" grid only.



BLADE CLIP | RP-LBI-BLC-10P (10 PACK ONLY)

The Blade Clip is designed to provide a retrofit solution for fixtures that have thin sheet metal or plastic film reflectors commonly found on high bay fixtures. The rotating mounting blade provides a degree of freedom to align the mounting holes on the blade with fastening locations that may not be in-line with the light bar or where the distance between available mounting points is greater than the length of the light bar. It is common to attach the blade to the same point holding the thin reflector to the fixture frame.



UP/DOWN CLIP | RP-LBI-UDC-10P (10 PACK ONLY)

Use the Up/Down clip with our suspended in-line kit to clip a shorter bar to provide up-light. For example if suspending a 4ft, use the 3ft OR 2ft as the up-light, (so there is room for the suspension-kit connection). The RP-LBI-SIL-KIT comes with wire clips to hold linking power cable for UP bars in-line and neat. (linking cable not included)



LBI JUNCTION BOX | RP-LBI-JBOX-1.5X4

The LBI junction box is used to connect LBI wiring to branch circuits. Connections are made from the LBI Junction box to the Light Bar using seamless connector or linking cable. The internal wiring (except optional switch) are rated to 600V (for 347V operation) For undercabinet or task lighting, the junction box includes an optional 120V ON/OFF switch that can be installed into a rectangular knock-out on the cover. Kit includes 1pc RP-LBI-SSC-DIM.



12FT 90-DEGREE INCOMING POWER CABLE | RP-LBI-G1-IP-90DEG-12F-DIM

Use the 90 degree Incoming Power Cable for an easy and clean connection to suspended LBI fixtures.




— LEDBarKit-Internal Driver (LBI)

SUSPENDED IN LINE KIT*




*Linking cable not included in Suspended In Line Kit

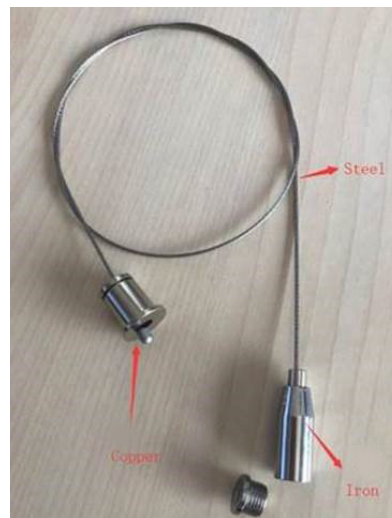


RECOMMENDED INSTALLATION

CONTINUOUS RUN



CONTINUOUS RUN WITH OPTIONAL OC2 SENSOR KIT

OC2 Sensor can be installed on either end or in between any bars




OPTIONAL OC2 SENSOR KIT



OPTIONAL OC2 SENSOR KIT


CONTINUOUS RUN WITH SPACER CONNECT

Ideal for retrofitting fixtures of standard length

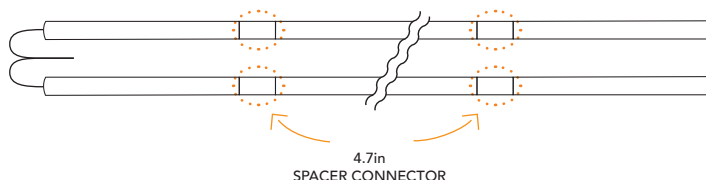


4.7in
SPACER CONNECTOR


DIMENSIONS



19.3"
RP-LBI-G1-2F-...



31.3"
RP-LBI-G1-3F-...



43.3"
RP-LBI-G1-4F-...

*When calculating continuous run, note that actual lengths are less than what is stated in the part number.

ACCESSORIES

SEAMLESS CONNECTOR*

RP-LBI-SSC-DIM (sold separately)

Links the OCC control signal to all bars.

RP-LBI-SSC-NODIM (sold separately)

Isolates each OCC control group within the continuous run.

*All continuous run installations require seamless connectors.



SUSPENDED IN-LINE BRACKET KIT

RP-LBI-SIL (sold separately)

Recommended qty = number of bars + 1

12FT 90-DEGREE INCOMING POWER CABLE

RP-LBI-G1-IP-90DEG-12F-DIM

LINKING CABLES*

RP-LBI-LC-6IN-DIM


RP-LBI-LC-6IN-NODIM

RP-LBI-LC-12IN-DIM

RP-LBI-LC-12IN-NODIM

RP-LBI-LC-18IN-DIM

RP-LBI-LC-18IN-NODIM




* Choose the appropriate linking cable length based on the dimensions of your fixture.




LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

—○ LEDBarKit-Internal Driver (LBI) RETROFIT TROFFERS*

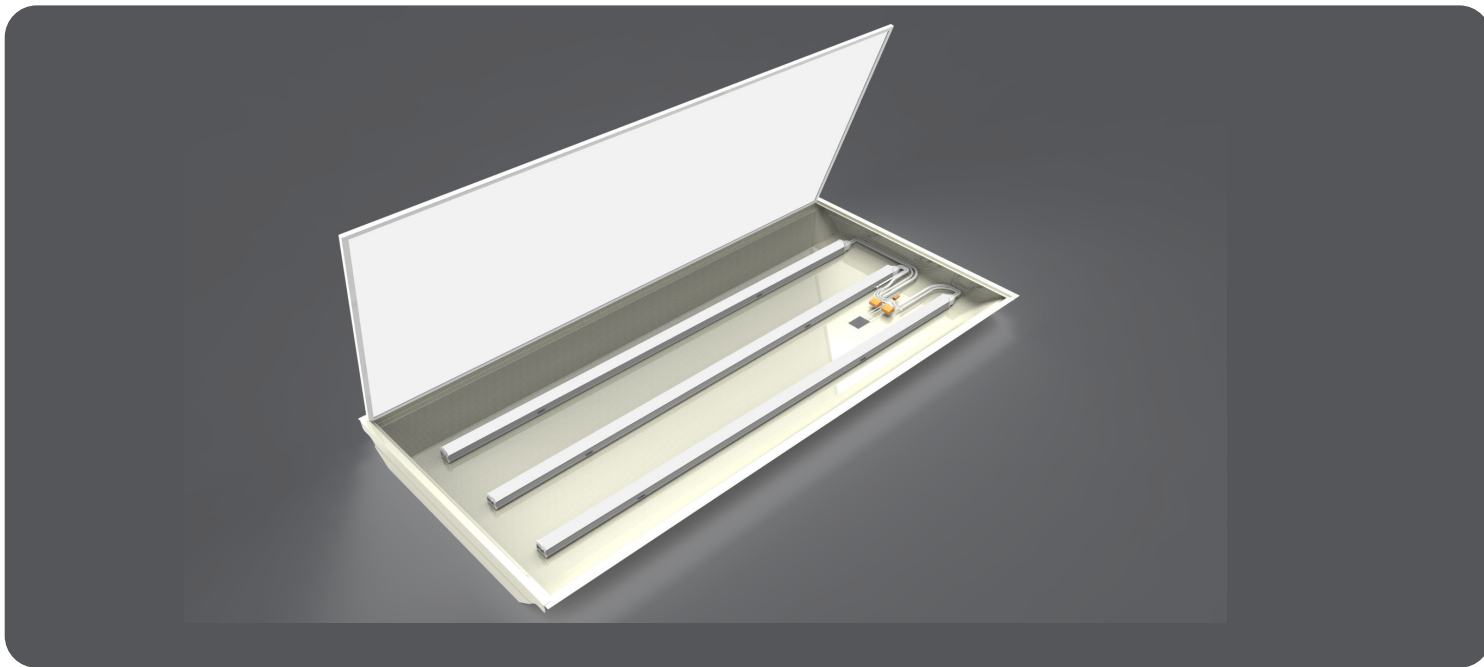

RECOMMENDED INSTALLATION

OPTIONAL OC2 SENSOR KIT




PARALLEL

This method is the most cost effective. Each light bar comes with its own incoming power cable. Multiple incoming power cables are connected together under the ballast cover.



ACCESSORIES

INCOMING POWER CABLES

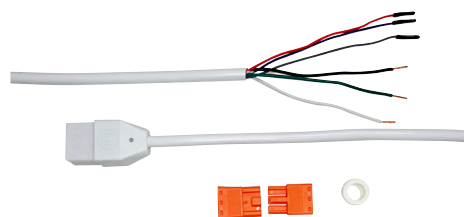

SERIES

This method is the fastest. The first light bar uses an incoming power cable, additional light bars are linked using "linking cables" which are available in a variety of lengths. Linking cables are sold separately.



LINKING CABLES*

RP-LBI-LC-6IN-DIM
RP-LBI-LC-6IN-NODIM
RP-LBI-LC-12IN-DIM
RP-LBI-LC-12IN-NODIM
RP-LBI-LC-18IN-DIM
RP-LBI-LC-18IN-NODIM


* Choose the appropriate linking cable length based on the dimensions of your fixture.



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

—○ LEDBarKit-Internal Driver (LBI)

RETROFIT LINEAR FIXTURES *

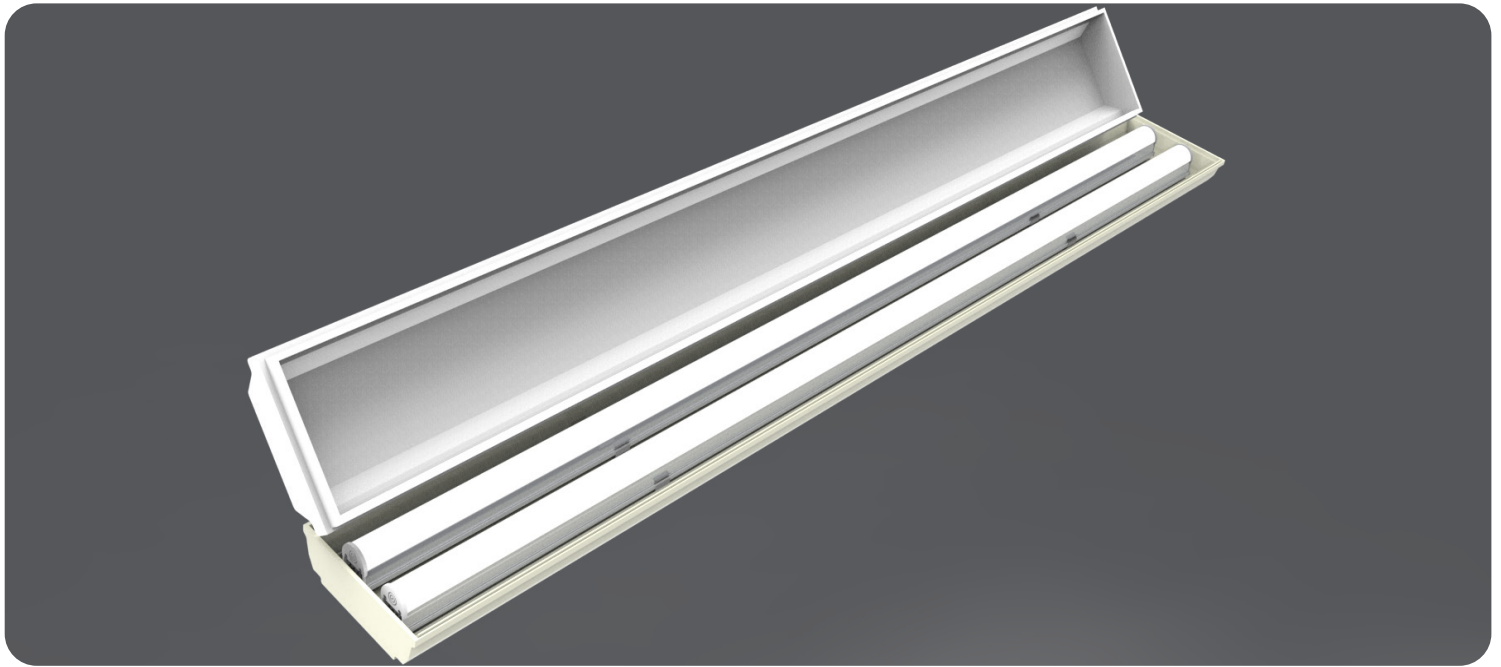


* Example Retrofit. Fixture not included.

RECOMMENDED INSTALLATION


PARALLEL

Multiple incoming power cables are connected together under the ballast cover.




ACCESSORIES

INCOMING POWER CABLES

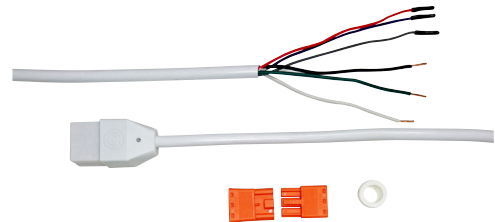


SERIES

This method is the fastest. The first light bar uses an incoming power cable, additional light bars are linked using "linking cables" which are available in a variety of lengths.



LINKING CABLES*

RP-LBI-LC-6IN-DIM
RP-LBI-LC-6IN-NODIM
RP-LBI-LC-12IN-DIM
RP-LBI-LC-12IN-NODIM
RP-LBI-LC-18IN-DIM
RP-LBI-LC-18IN-NODIM




* Choose the appropriate linking cable length based on the dimensions of your fixture.



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

—○ LEDBarKit-Internal Driver (LBI)


CONTINUOUS RUN FIXTURES / RETROFIT*

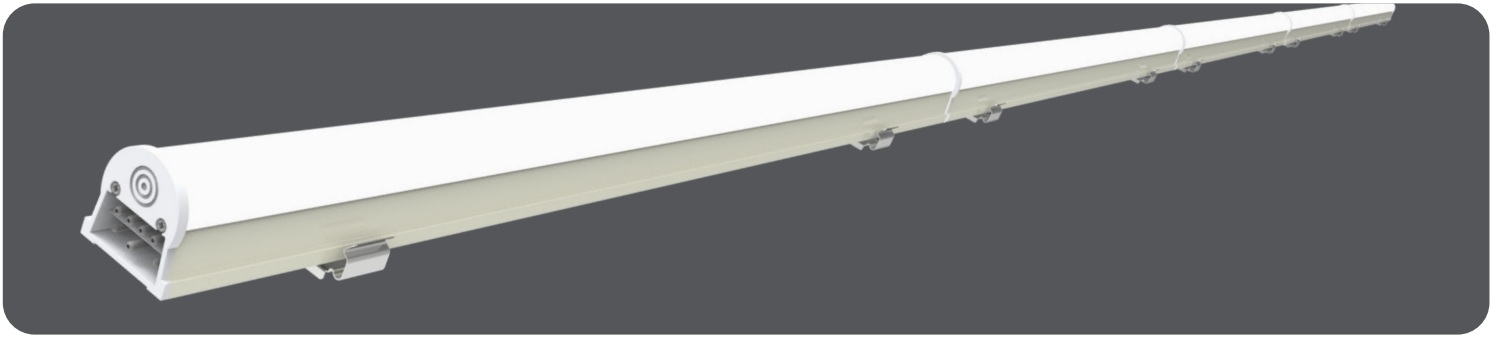

* Example Retrofit. Fixture not included.


RECOMMENDED INSTALLATION

CONTINUOUS RUN




CONTINUOUS RUN WITH OPTIONAL OC2 SENSOR KIT

OC2 Sensor can be installed on either end or in between any bars




CONTINUOUS RUN WITH SPACER CONNECT


Ideal for retrofitting fixtures of standard length

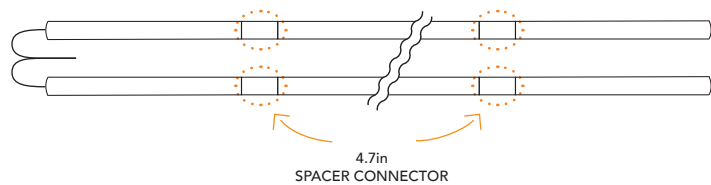

DIMENSIONS



19.3"
RP-LBI-G1-2F-...





31.3"
RP-LBI-G1-3F-...



43.3"
RP-LBI-G1-4F-...

*When calculating continuous run, note that actual lengths are less than what is stated in the part number.

ACCESSORIES



INCOMING POWER CABLES


*Connect up to 40 units on one incoming power cable

 **Light Efficient Design**

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com


—○ LEDBarKit-Internal Driver (LBI)

HIGH BAY FIXTURE / RETROFIT*

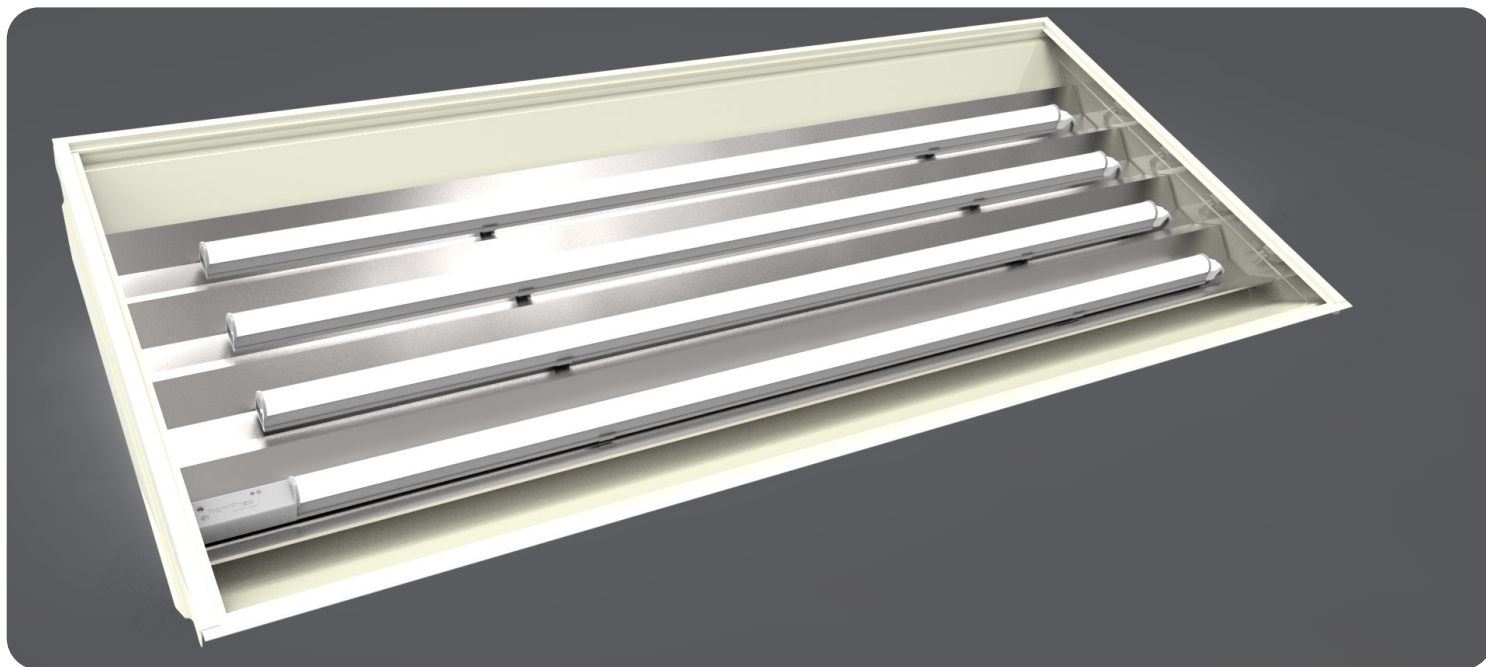

* Example Retrofit. Fixture not included.

RECOMMENDED INSTALLATION



PARALLEL


This method is the most cost effective. Each light bar comes with its own incoming power cable. Multiple incoming power cables are connected together under the ballast cover.

ACCESSORIES


BLADE CLIP

RP-LBI-BLC-10P

The Blade Clip is designed to provide a retrofit solution for fixtures that have thin sheet metal or plastic film reflectors commonly found on high bay fixtures. It is common to attach the blade to the same point holding the thin reflector to the fixture frame.



INCOMING POWER CABLES




SERIES

This method is the fastest. The first light bar uses an incoming power cable, additional light bars are linked using "linking cables" which are available in a variety of lengths. Linking cables are sold separately.

LINKING CABLES*

RP-LBI-LC-6IN-DIM
RP-LBI-LC-6IN-NODIM
RP-LBI-LC-12IN-DIM
RP-LBI-LC-12IN-NODIM
RP-LBI-LC-18IN-DIM
RP-LBI-LC-18IN-NODIM



* Choose the appropriate linking cable length based on the dimensions of your fixture.


Light Bars are DLC listed under the high bay fixture category. You can choose to purchase Light Bars only and hang/mount as a standalone fixture or retrofit an existing high bay fixture housing as shown above.


Light Efficient Design

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com


—○ LEDBarKit-Internal Driver (LBI)

STAIRWELL FIXTURE KIT / UTILITY FIXTURE*

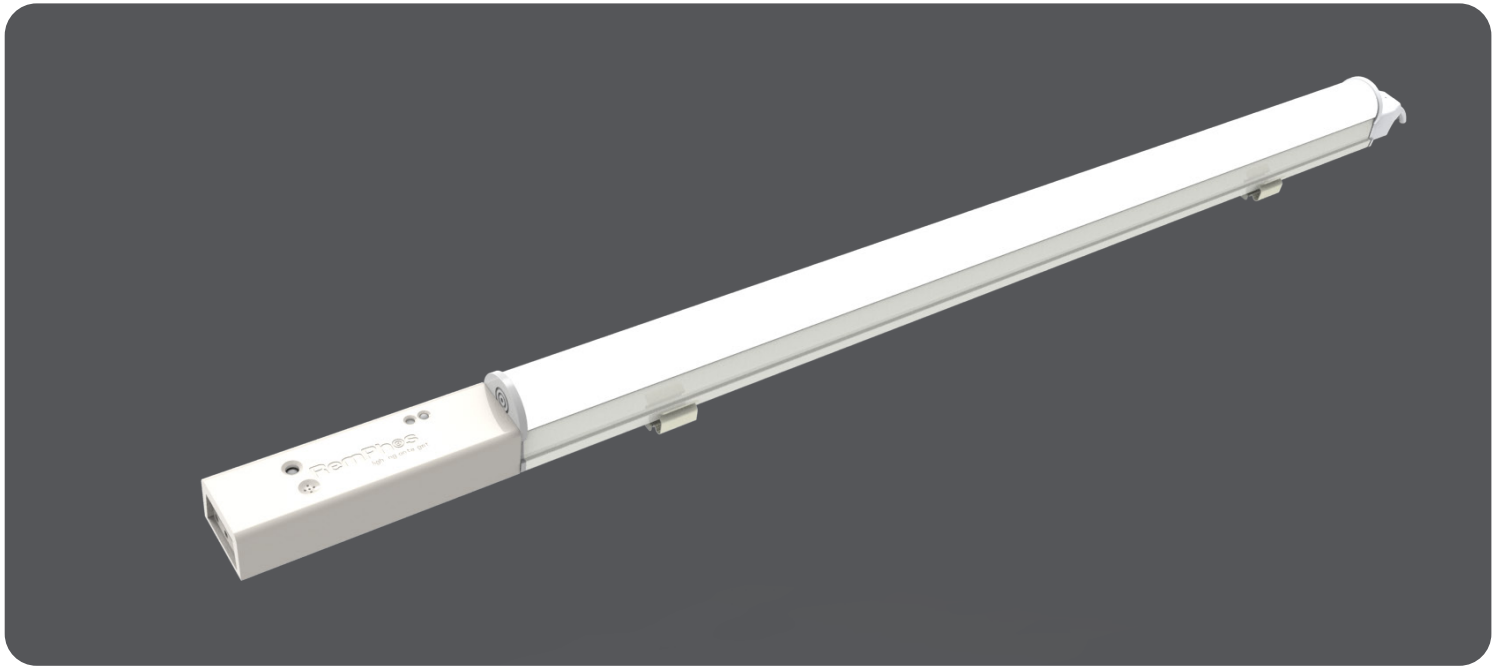

* Example Retrofit. Fixture not included.

STAIRWELL FIXTURE KIT INCLUDES




ORDERING

2FT: RP-LBI-2F-12W-40K-W-OC2

4FT: RP-LBI-4F-15W-40K-W-OC2

1 - INCOMING POWER CABLE

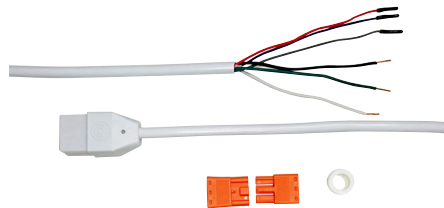

1 - OC2 SENSOR KIT

RP-LBI-OC2

Sensor + Seamless Connector-DIM

UTILITY FIXTURE

To use as a standalone utility fixture, purchase 1X Light Bar kit and 1X incoming power cable kit.

Fixture housings to be used as wiring and emergency battery compartment currently in development. Call for more information.



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

RP-LBI-OC2

SENSOR KIT FOR LEDBARKIT - INTERNAL DRIVER (LBI)

Remote Control Settings

If satisfied with OC2 default settings, remote control is not needed. If settings need to be changed, optional remote control (RP-OC2-REMOTE-IR11), is required.



PERMANENT ON FUNCTION

Press 'ON' button, fixture goes to permanent on mode, sensor is disabled. With memory function against power failure.

* Press 'Auto' or 'Reset' to quit this mode.



PERMANENT OFF FUNCTION

Press 'OFF' button, fixture goes to permanent off mode, sensor is disabled.

* Press 'Auto' or 'Reset' learn' to quit this mode.



SENSOR MODE

Press 'Auto' button, the sensor starts to work and all settings remain the same as the latest status before the light was switched on/off.



RESET FUNCTION

Press 'Reset' button, all settings go back to factory default settings.

FACTORY DEFAULT SETTINGS - REMOTE REQUIRED TO CHANGE SETTINGS

Sensitivity=50%

Daylight sensor=disable

Hold time=5min

Twilight time=+∞

Twilight level=30%

NOTE daylight harvest function is disabled in factory default mode. Choose the appropriate lux threshold first to activate the daylight harvest function.



DISABLE DAYLIGHT SENSOR

Press 'Disable' button, the daylight sensor will be disabled, the motion sensor will work always, even in daytime.



TEST MODE

'Test mode' is used for testing purpose only, for users to check the the desired detection range.

Quit test mode by pressing any other button of 'Hold time'. The sensor settings are changed accordingly.


TEST MODE SETTINGS

Daylight sensor=disable

Hold time=3s

Twilight time=N/A

Twilight level=N/A

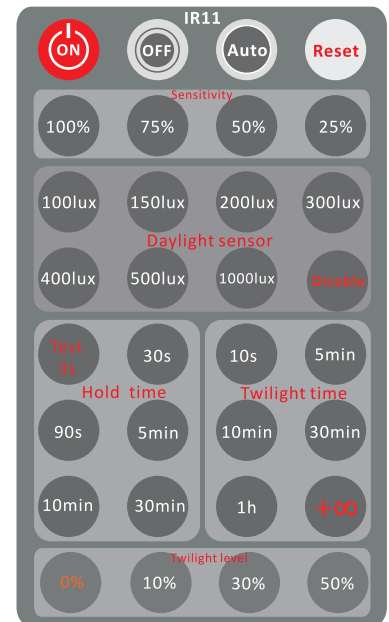

IR11

- The buzzer short beeps (~0.5s) ONCE when sensor successfully receives RC signal after pressing any button.
- When "twilight level" set at 0%, it becomes ON/OFF control.
- The sensor controls the LBI fixtures w/ 0-10V inputs. Even if on/off only function is desired, the OC2 sensor is only compatible w/ PRO series LBI products. (Not compatible w/ LBI Base series)



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com