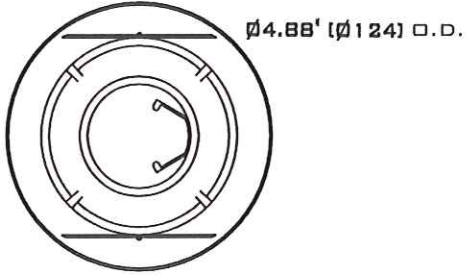





X3501



 3.622" [92MM]
CUTOUT HOLE







TRIM

- (-01) GLOSSY WHITE
- (-11) MATTE WHITE
- (-13) SATIN NICKEL

PROTECTIVE LENS

NON-ADJUSTABL
FROSTED GLASS

LIGHT SOURCE

-  LED GU10 - 120V - 2W MAX.
EQUIVALENT LIGHTING EFFECT OF A 35W GU10  GU10 / GZ10 - 50W MAX. 120V
38° AND 60° BEAM AVAILABLE.
-  LED MR16 - 12V - 5W MAX.
EQUIVALENT LIGHTING EFFECT OF A 40W MR16  MR16 - 12V - 50W MAX.
38° AND 60° BEAM AVAILABLE.

HOUSINGS

REMODELING

NEW CONSTRUCTION

INSULATED




MR16 - 12V 

XR35MR16M

XN35MR16M

XIC35MR16M

GU10 GZ10 

XR35GU

XN35GU

XIC35GU

P R I O R I