





X4003

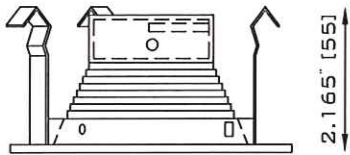

Ø4.92" [Ø125] O.D.

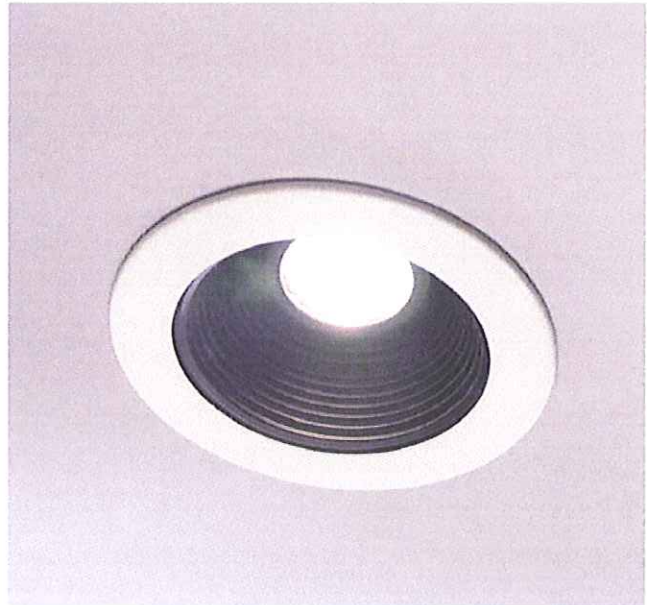

4.2125" [107mm]  
CUTOUT HOLE







TRIM

- (-01) GLOSSY WHITE
- (-11) MATTE WHITE
- (-13) SATIN NICKEL


REFLECTOR


- ADJUSTABLE LIGHT
- BLACK STEPPED BAFFLE

LIGHT SOURCE

-  LED GU10 - 120V - 2W MAX.  
EQUIVALENT LIGHTING EFFECT OF A 35W GU10
  GU10 / GZ10 - 50W MAX. 120V  
38° AND 60° BEAM AVAILABLE.
-  LED MR16 - 12V - 5W MAX.  
EQUIVALENT LIGHTING EFFECT OF A 40W MR16
  MR16 - 12V - 50W MAX.  
38° AND 60° BEAM AVAILABLE.

HOUSINGS

MR16 - 12V 

GU10 GZ10 

REMODELING



XR40MR16M

XR40GU

NEW CONSTRUCTION



XN40MR16M

XN40GU

INSULATED



XIC40MR16M

XIC40GU