



XN35GU

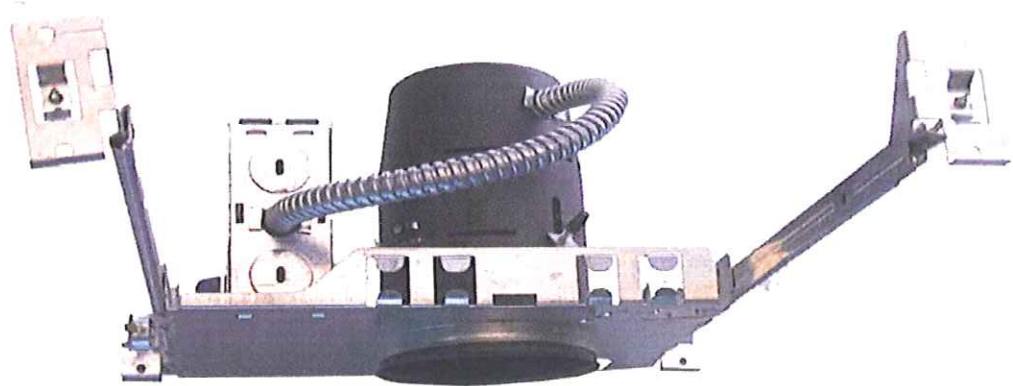

#### DESCRIPTION



NEW CONSTRUCTION NON-IC HOUSING  
LINE VOLTAGE FOR AREAS WITHOUT INSULATION.

INTERNAL THERMAL PROTECTION.

ADJUSTABLE MOUNTING BARS 10" TO 24"


#### CUT OUT

3.622" (92MM)



#### LIGHT SOURCE

 GU10 / GZ10 - 50W MAX. 120V

 LED GU10 - 120V - 2W MAX.  
EQUIVALENT LIGHTING EFFECT OF  
A 35W GU10  
38° AND 60° BEAM AVAILABLE.

#### TECHNICAL INFO

CAN HEIGHT: 6.0" (152 MM)  
FRAME WIDTH: 6.5" (165 MM)  
FRAME LENGTH: 9.0" (229 MM)  
120V

