


INSTALLATION - LED WORK LIGHT



WARNING

- Can not use the electric generator to test the LED lamp.
- Please abide by related country, regional and local law and regulations when install this fixture.
- Please turn off the power before installation or maintenance.
- Proper earth grounding is required to ensure safety.
- Minimum 75°C Supply Conductor Requirement
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
- Please wear gloves to avoid injury before installation.
- If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.
- Please check if there is any damage during shipping. If so, please contact manufacturer timely.
- Please read the installation instruction carefully to check whether all the accessories are complete. After confirmation, then install the fixture according to installation steps.

Installation instruction

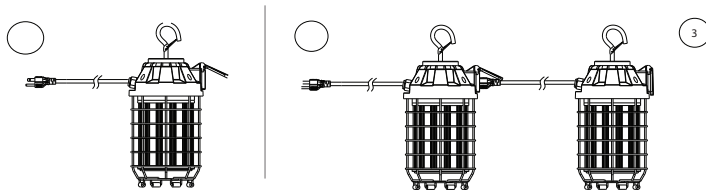

1. Open the lid.
2. Plug another fixture.
(Note: 1. Linkable 100W-10pcs Max
2. Linkable 60W-16pcs Max
3. Linkable 130W-6pcs Max)
3. Connect to power.

a. Hook Mount:

1. Screw the hook into lamp base. (Figure 1)
2. Hang on the lamp on the ceiling hook. (Figure 2)
3. Insert the plug into the socket, the installation is complete.




Figure 1




Figure 2




Figure 3




Figure 4

b. Round Pipe Mount:

1. Screw the round pipe into lamp base. (Figure 5)
2. Insert the fixture into a round pipe with diameter 20-25 mm, the round pole must have a hole with diameter 5.5-7 mm (Figure6), and then tighten butterfly screw (Figure7) (Figure8), please ensure that the butterfly screw is fully inserted into the hole on the round pole.
3. Connect the plug and socket to complete the installation.

c. Magnet Mount

1. Tighten the magnet bracket on the lamp base with butterfly screw. (Figure 9) (Figure10).
2. Attach the fixture to the iron plate (Figure11). Pay attention to the fragile magnet.
3. Connect the plug and socket, then finish.




Figure 9




Figure 10




Figure 11