

Non-Dimmable LED Plug-in Drivers

DR-12V-30W-V2 DR-12V-96W-V2
DR-12V-60W-V2 DR-24V-96W-V2

Date:	Project:	Comments:
Prepared for:	Type:	



Performance Specifications

Input Voltage	100-240Vac
Output Voltage	12/24Vdc
Maximum Input Current	2A
Frequency	50/60Hz
Efficiency Level	VI
Class	Class 2 (except 12V 96W)
Power Factor	0.6
Lifetime	50,000 Hours
Dimming	Non-Dimmable
Maximum Efficiency	85%

Physical Specifications

Colour	Black
Material of Body	Plastic
Operating Temperature	0°C to 40°C
Storage Temperature	-40°C to 85°C
Environment	Dry
Surge Protection L-N	1kV
Surge Protection L/N-PE	2kV
Wire Size of Leads AC (AWG)	18AWG
Power cord length	DC: 4ft, AC: 4ft
Type of Connector	C14

Model-Specific Differences

	DR-12V-30W-V2	DR-12V-60W-V2	DR-12V-96W-V2	DR-24V-96W-V2:
Rated Power	30W	60W	96W	96W
Weight	0.66lbs	0.77lbs	1.26lbs	1.26lbs
Wire Size of Leads DC (AWG)	22AWG	18AWG	16AWG	18AWG
Maximum Output Current	2500mA	5000mA	8000mA	4000mA

Ordering Information


Orders placed by 3pm are shipped out same-day

Ordering Code	Model Number	Certification and Compliances	Warranty	Individual Purchase Quantity	Master Carton Quantity
DR-12V-30W-V2	DR-12V-30W-V2	cULus, FCC, Class 2	3 Years	1	50
DR-12V-60W-V2	DR-12V-60W-V2	cULus, FCC, Class 2			40
DR-12V-96W-V2	DR-12V-96W-V2	cULus, FCC			40
DR-24V-96W-V2	DR-24V-96W-V2	cULus, FCC, Class 2			40




Dimensions

DR-12V-30W-V2

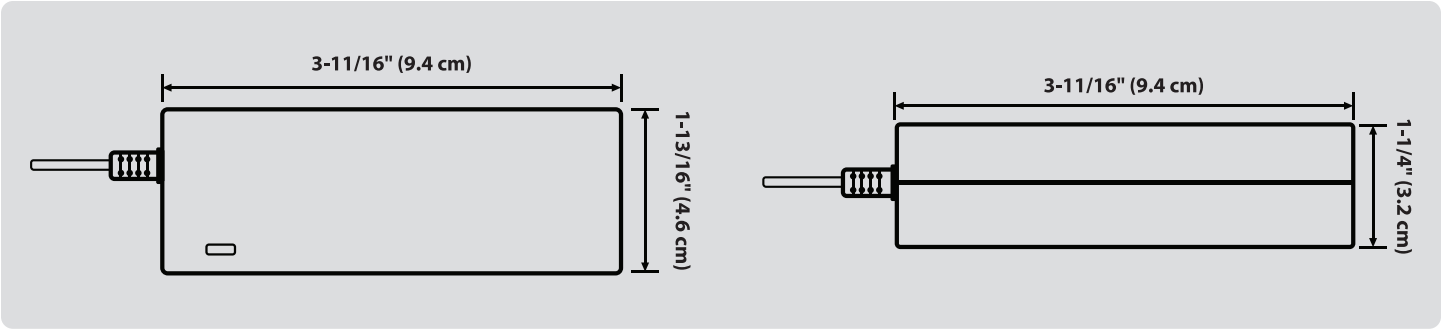


Length	Width	Depth
3-11/16" (9.4 cm)	1-13/16" (4.6 cm)	1-1/4" (3.2 cm)

DR-12V-60W-V2

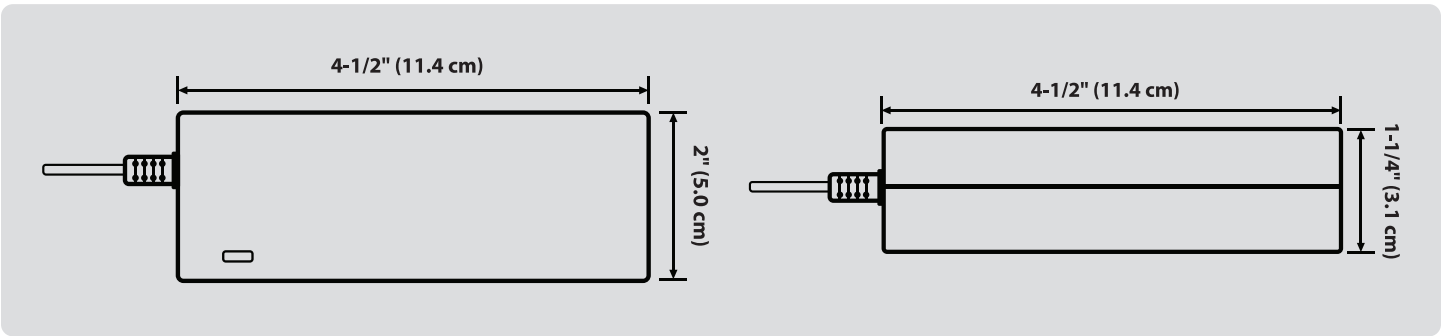

Length	Width	Depth
4-1/2" (11.4 cm)	2" (5 cm)	1-1/4" (3.1 cm)

DR-12V-96W-V2/DR-24V-96W-V2

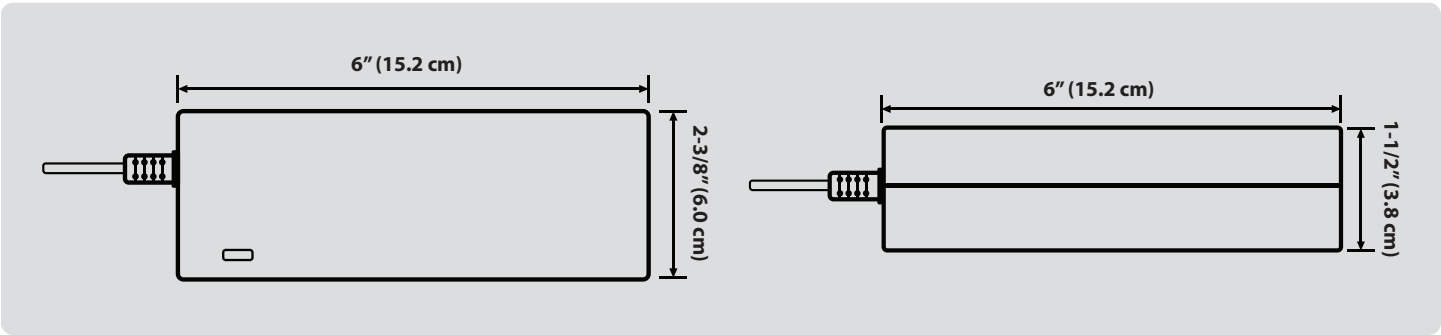

Length	Width	Depth
6" (15.2 cm)	2-3/8" (6.0 cm)	1-1/2" (3.8 cm)

