

EV Charger 48A

EV1-LV2-48A-1C-V2

Date:	Project:	Comments:
Prepared for:	Type:	



IP65

IK08



Specifications

Input electrical ratings	- Voltage: Single phase, 208-240Vac, 60 Hz - Breaker rating: 60 A - Power: 11.5 kW at 240 Vac; 9.9 kW at 208 Vac
Output electrical ratings	- Voltage: 208-240 Vac, 60 Hz - Max current: 48 A - Power: 11.5 kW at 240 Vac; 9.9 kW at 208 Vac
Metering	1% accurate energy meter
Dimensions	9-13/16" (24.9 cm) x 13-13/16" (35.1 cm) x 5-1/8" (13 cm)
Wiring options	Hardwire
Output cable	25 ft. cordset with J1772 EV connector
Operating temperature	-30°C to 50°C
Indicators	4" LED Screen Charging and status indicator LED
Mounting option	Wall or pedestal
Certification and Compliances	cETLus, IP65, IK08, FCC, SAE J1772 2017 Ed.


Ordering Information

Stock item. Orders placed by 3pm ship out the same day.

Ordering Code	Suitable Conditions	Operating Temperature	Max power output	Indoor/Outdoor	Input Voltage	Amperage
EV1-LV2-48A-1C-V2	Wet	-30°C to 50°C	11.5kW	Interior and exterior	208Vac - 240Vac	48A



Dimensions

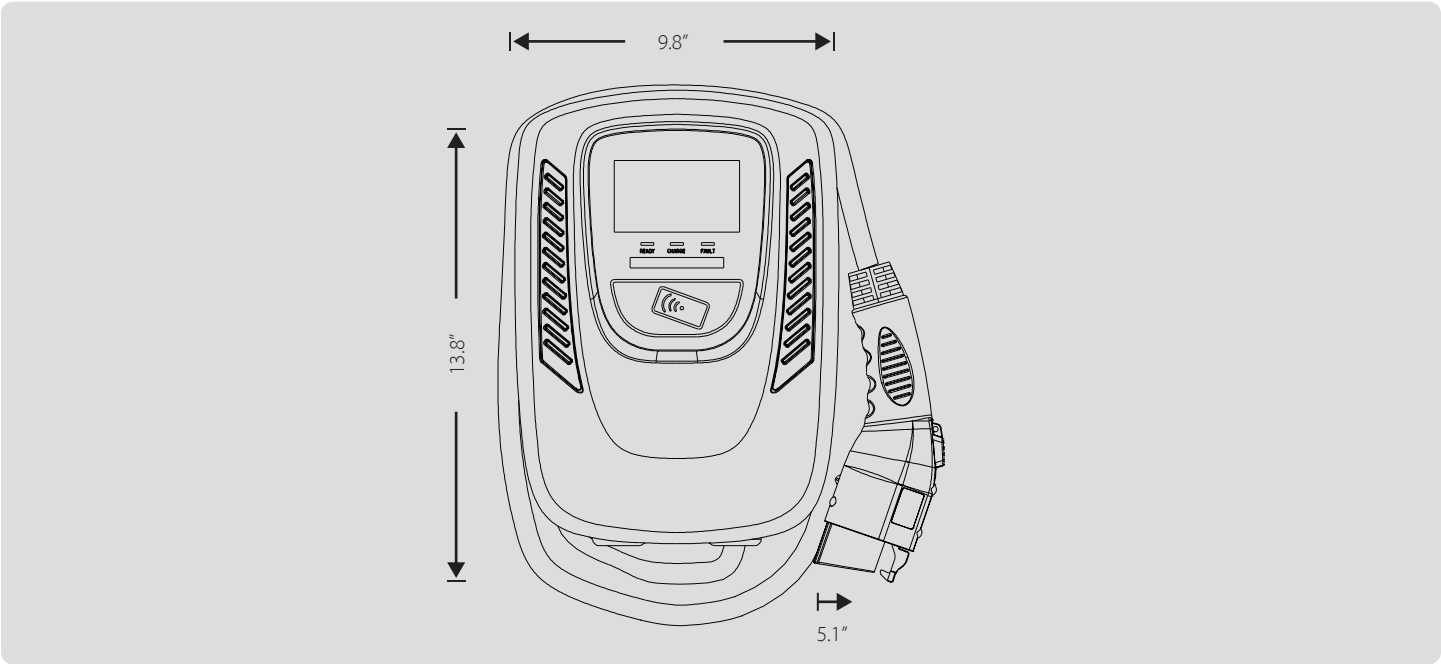

Dimensions	Charger Cord length	Power Cord Length
9.8" x 13.8" x 5.1"	25ft	2.5 ft

Additional Accessories



Holster Dock
EV-HD-V1
(Sold Separately)



Pedestal Mount
EV1-PM-1S-V2
(Sold Separately)