

MaxLite® GuardMax Series: 15W & 30W Wall Packs



General Safety Information

⚠ WARNING

WARNING:

MIN 90°C SUPPLY CONDUCTORS

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

CAUTION:

- Do not use an electric generator to test the LED lamp.
- Please abide by related country, regional and local law and regulations when installing this fixture.
- Please don't install the fixture when raining to lower the risk of electric shock and avoid failure.

NOTE:

- To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
- Please wear gloves to avoid injury before installation.
- If any smoke or spark of the wire happens, please turn off the power immediately and notify relevant personnel.




*Pictures are for illustration purposes only.
Your model may vary.*


Standard Wiring Diagram



Wiring Diagram for Luminaires with 5W Backup Battery

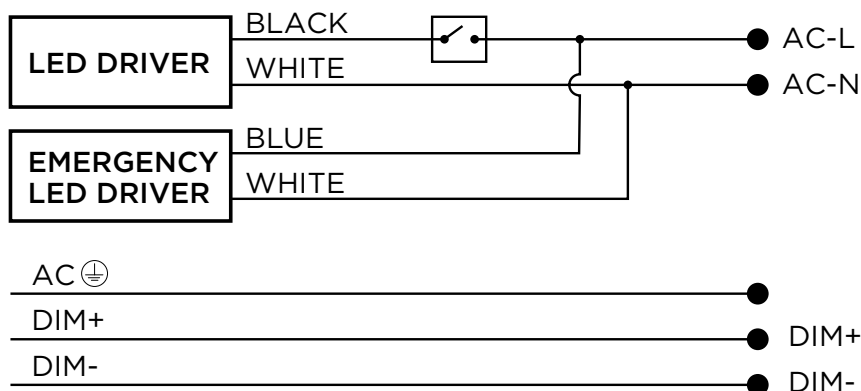


MaxLite® GuardMax Series: 15W & 30W Wall Packs

CCT Selection Instructions

Adjust the DIP switch inside the luminaire to the desired CCT setting.

DIP Switch settings:

- 3K=3000K
- 4K=4000K
- 5K=5000K

Wattage Adjustment Instructions


For models with wattage selectability, adjust the DIP switch to the desired setting.

Installation Instructions - Direct J-Box/Wall Mount


Disconnect the power by turning off the circuit breaker or by removing the appropriate fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE #1: There is an "UP" label on the fixture's backplate to indicate proper orientation. If photocell function is not required, unplug the connector at the top of the fixture housing.


NOTE #2: Add a bead of exterior grade silicone sealant around the perimeter of the wall pack on the wall to inhibit any moisture from attachment bolts




1. Turn off the power.




2. Loosen the four (4) screws shown in the illustration below. Remove the front cover from the backplate




3. Remove the 1/2 KO plug from the backplate.




4. Peel off the yellow sticker from the foam gasket and apply it to the j-box pattern on the wall side of the backplate.




5. Fix the backplate to the wall. It is recommended to secure it to the j-box and also the wall with anchor bolts (not included).

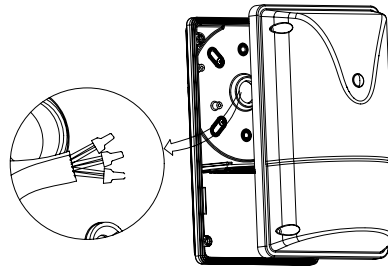


6. Connect the power supply to the luminaire. Ensure that the wiring connections are secure.




7. Secure the front cover to the backplate removed in step 1 with the four (4) screws.




8. Restore power to the fixture.

Disconnecting Photocontrol (PC)

1. For models with EM, temporarily remove the BBU unit to access the PC connector.



2. Disconnect the PC from the connector removed in step 1.



3. For models with EM, put the BBU unit back in place and secure with the screws

MaxLite® GuardMax Series: 15W & 30W Wall Packs**Warranty Information**

Maxlite Inc. warrants its products for a minimum period of **FIVE (5)** years from the earlier of the actual installation date or 90 days after the original date of purchase from a Maxlite authorized distributor/dealer (the "Warranty Period"), as follows: If a Product fails to operate during the Warranty Period as a result of defects in materials or workmanship, Maxlite will, at its option, repair it, replace it with the same or like Product.

Please refer to Maxlite's website (at <http://maxlite.com/resources/warranties>) for the complete coverage details as well as the terms and conditions of our warranty. Please note that it is NOT a requirement to register your warranty in order to initiate a warranty claim unless a Ten Year warranty has been purchased separately, or when applicable and/or purchased separately, your warranty contains a replacement labor allowance.

Limitation of Liability

THIS WARRANTY IS EXCLUSIVE, AND IS THE SOLE REMEDY FOR ANY AND ALL CLAIMS, WHETHER IN CONTRACT, IN TORT OR OTHERWISE ARISING FROM THE FAILURE OF PRODUCT AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ALL WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED TO THE EXTENT PERMITTED BY LAW AND, IN ANY EVENT, SHALL BE LIMITED TO THE WARRANTY PERIOD SPECIFIED ABOVE. THE LIABILITY OF MAXLITE SHALL BE LIMITED TO THE TERMS OF THE EXPRESS WARRANTY SET FORTH HEREIN. IN NO EVENT WILL MAXLITE BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES INCLUDING, WITHOUT LIMITATION, DAMAGES RESULTING FROM LOSS OF USE, PROFITS, BUSINESS OR GOODWILL, LABOR COSTS, REMOVAL OR INSTALLATION COSTS, WHETHER OR NOT MAXLITE HAS BEEN ADVISED OF THE POSSIBILITY THEREOF. UNDER NO CIRCUMSTANCES SHALL MAXLITE'S ENTIRE LIABILITY FOR A DEFECTIVE PRODUCT EXCEED THE PURCHASE PRICE OF THAT PRODUCT (EXCLUDING LABOR WARRANTY COVERAGE WHERE SPECIFICALLY OFFERED BY MAXLITE). WARRANTY SERVICES PROVIDED UNDER THESE TERMS AND CONDITIONS DO NOT ENSURE THE UNINTERRUPTED OPERATION OF PRODUCTS; MAXLITE SHALL NOT BE LIABLE FOR DAMAGES CAUSED BY ANY DELAYS INVOLVING WARRANTY SERVICE.

This Warranty gives you specific legal rights and you may also have other rights that may vary from state to state. Because some states or jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damages, such limitation may not apply to you.