

# Kellems® Wire Management Products

## Underground K-Type Pulling Grips

Rotating Eye, Double Weave, Galvanized Steel




### WARNING!

It is important that you read all breaking strength, safety and technical data relating to this product on pages T-17 through T-27.

### K-Type Grips

Kellems® Rotating Eye, K-Type Pulling Grips are made of high strength galvanized steel strand. All Grips feature double weave mesh for greater strength and added mesh contact on the table, to handle longer or heavier pulling jobs. The forged eye mates easily with a swivel or shackle.

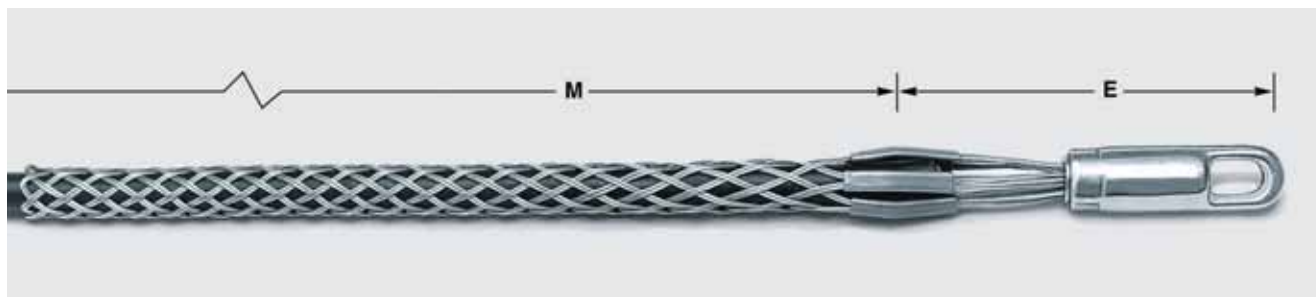

### K-Type Grips

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E In. (cm)	M In. (cm)	Rotating Eye Diameter Inches (cm)	Catalog Numbers
<b>Short</b>					
.50"--.61" (1.27-1.55)	5,600 (24,909)	5" (12.70)	11" (27.94)	7/8" (2.22)	<b>03301001</b>
.62"--.74" (1.57-1.88)	6,800 (30,246)	5" (12.70)	11" (27.94)	7/8" (2.22)	<b>03301002</b>
.75"--.99" (1.90-2.51)	6,800 (30,246)	6" (15.24)	20" (50.80)	1" (2.54)	<b>03301013</b>
1.00"-1.24" (2.54-3.15)	12,800 (56,934)	7" (17.78)	20" (50.80)	1 1/8" (3.49)	<b>03301014</b>
1.25"-1.49" (3.17-3.78)	12,800 (56,934)	7" (17.78)	21" (53.34)	1 1/8" (3.49)	<b>03301016</b>
1.50"-1.99" (3.81-5.05)	16,400 (72,941)	7" (17.78)	25" (63.50)	1 1/8" (3.49)	<b>03301017</b>
2.00"-2.49" (5.08-6.32)	27,200 (120,986)	8" (20.32)	26" (66.04)	1 1/2" (4.13)	<b>03301018</b>
2.50"-2.99" (6.35-7.59)	33,000 (146,784)	10" (25.40)	28" (71.12)	1 7/8" (4.76)	<b>03301019</b>
3.00"-3.49" (7.62-8.86)	41,000 (182,368)	10" (25.40)	30" (76.20)	1 7/8" (4.76)	<b>03301020</b>
3.50"-3.99" (8.89-10.13)	48,000 (213,504)	10" (25.40)	32" (81.28)	1 7/8" (4.76)	<b>03301021</b>
4.00"-4.49" (10.16-11.40)	48,000 (213,504)	10" (25.40)	33" (83.82)	1 7/8" (4.76)	<b>033011017</b>
<b>Standard</b>					
.50"--.61" (1.27-1.55)	5,600 (24,909)	5" (12.70)	16" (40.64)	7/8" (2.22)	<b>03301011</b>
.62"--.74" (1.57-1.88)	6,800 (30,246)	5" (12.70)	16" (40.64)	7/8" (2.22)	<b>03301012</b>
.75"--.99" (1.90-2.51)	9,600 (42,701)	6" (15.24)	32" (81.28)	1" (2.54)	<b>03301024</b>
1.00"-1.49" (2.54-3.78)	16,400 (72,947)	7" (17.78)	33" (83.82)	1 1/8" (3.49)	<b>03301025</b>
1.50"-1.99" (3.81-5.05)	16,400 (72,947)	7" (17.78)	34" (86.36)	1 1/8" (3.49)	<b>03301026</b>
2.00"-2.49" (5.08-6.32)	27,200 (120,986)	9" (22.86)	36" (91.44)	1 1/2" (4.13)	<b>03301027</b>
2.50"-2.99" (6.35-7.59)	33,000 (146,784)	10" (25.40)	38" (96.52)	1 7/8" (4.76)	<b>03301028</b>
3.00"-3.49" (7.62-8.86)	41,000 (182,368)	10" (25.40)	39" (99.06)	1 7/8" (4.76)	<b>03301029</b>
3.50"-3.99" (8.89-10.13)	48,000 (213,504)	10" (25.40)	41" (104.14)	1 7/8" (4.76)	<b>03301030</b>
4.00"-4.49" (10.16-11.40)	48,000 (213,504)	10" (25.40)	42" (106.68)	1 7/8" (4.76)	<b>03301031</b>
4.50"-4.99" (11.43-12.67)	48,000 (213,504)	10" (25.40)	58" (147.32)	1 7/8" (4.76)	<b>03301039</b>
5.00"-5.99" (12.70-15.21)	48,000 (213,504)	10" (25.40)	60" (152.40)	1 7/8" (4.76)	<b>03301047</b>
6.00"-6.99" (15.24-17.75)	48,000 (213,504)	10" (25.40)	66" (167.64)	1 7/8" (4.76)	<b>03301045</b>

E-Eye length M-Mesh length at nominal diameter

Note: Refer to page T-26 for multiple cables in a single pulling grip.