

Internationally Rated Twist Lock® Devices Including New 63 AMP 230 Volt, 3-Wire Shore Power System


IP56
SUITABILITY



Safe Non-Interchangeable Solutions:

Hubbell, the only manufacturer of CE certified 16 AMP and 32 AMP, Shore Power Systems dedicated to the International boating community, **now offers a 63 AMP Shore Power System.**

- **NOT INTERCHANGEABLE** with U.S. Shore Power Systems
- Traditional Marine Styling (Similar to 16 Amp and 32 Amp Systems)
- Unparalleled Safety
- Premium Quality

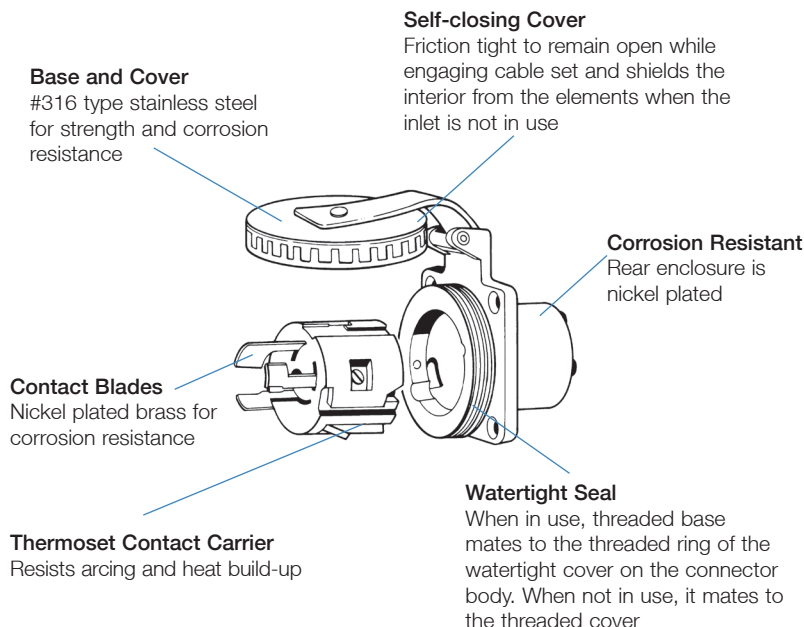

63A 230V Ship-To-Shore Power Systems

Traditional, stainless steel shore power inlet, including higher-quality metal threads, heat-resistant thermoset interior and box lug terminals.
HBL363SSX



Nickel plated brass plug with heat-resistant thermoset interior and box lug terminals. Cord grip range is .44 – 1.14 in. (11.1 – 29.0 mm)
HBL363CRP




Nickel plated brass connector body with heat-resistant thermoset interior and box lug terminals. Cord grip range is .44 – 1.14 in. (11.1 – 29.0 mm)
HBL363CRC



Single receptacle with heat-resistant thermoset base.
HBL363CRR



Seal-Tite® cover for connector bodies when used with 63A shore power inlets. Stainless steel threaded sealing ring makes connections watertight. Accepts cable ranging .69 – 1.06 in. (17.5 – 26.9 mm)
HBL77CM15 (Yellow)
HBL77CM15W (White)



Yellow Seal-Tite® Cover for 63 AMP plugs. Stainless steel threaded sealing ring makes connections watertight. Accepts cable ranging .69 – 1.06 in. (17.5 – 26.9 mm)
HBL77CM16 (Yellow)
HBL77CM16W (White)



Internationally Rated Twist Lock® Devices

16, 32 Amp, 230 Volt

IP56
 SUITABILITY

Hubbell offers the only CE certified electrical shore power system truly dedicated for boats destined for Europe and the International community. Hubbell's offering of international shore power inlets are available in traditional 316 stainless steel and attractive white non-metallic types resembling our domestic offering in style and appearance but are not interchangeable with the domestic shore power system.

Utilizing standard NEMA (National Electrical Manufacturer's Association) configurations not typically used in the marine market, Hubbell can offer a safe and non-interchangeable 16 Amp 230 Volt system and 32 Amp 230 Volt system for use with 50 cycle systems. The system includes white power supply cables (one-end, female only) in both the 16 Amp and 32 Amp categories.

16A 230V Ship-To-Shore Power System

Description	Catalog Number
Non-metallic, white, stylized, UV resistant shore power inlet. White Centrex cover makes the inlet weatherproof when closed. Mounting holes are 2.38 in. (60.3) on centers and match most existing mounting patterns. Rear enclosure strain/relief cap is provided.	HBL316NM
Traditional, stainless steel shore power inlet has new easy-to-wire terminations. Interior is transparent for quick and easy visual inspection. Interior is shielded from the elements by a gasketed, self-closing cover, watertight when cover is screwed in place. Mounting holes are 2.38 in. (60.3) on centers. Mounting screws and gasket included. Protective rear enclosure/strain relief also included.	HBL316SSX
25 ft. (7.6m) white, vinyl jacketed power supply cord with female (boat side) end only; other end blunt cut.	HBL316CSW25
50 ft. (15.2m) white, vinyl jacketed power supply cord with female (boat side) end only; other end blunt cut.	HBL316CSW
Yellow locking connector replacement end for HBL316CSW25 and HBL316CSW. IP20 suitability.	HBL316CRCX
White Seal-Tite® cover with threaded sealing ring for use with HBL316CRCX and HBL332CRCX connector bodies. IP55 suitability.	HBL60CM33W
Yellow Seal-Tite® cover with threaded sealing ring for use with HBL316CRCX and HBL332CRCX connector bodies. IP55 suitability.	HBL60CM33

32A 230V, 50 Cycle Ship-To-Shore Power System

Description	Catalog Number
Non-metallic, white, stylized, UV resistant shore power inlet. White Centrex cover makes the inlet weatherproof when closed. Mounting holes are 2.38 in. (60.3) on centers and match most existing mounting patterns. Rear enclosure/strain relief cap is provided.	HBL332NM
Traditional, stainless steel shore power inlet has new easy-to-wire terminations. Interior is transparent for quick and easy visual inspection. Interior is shielded from the elements by a gasketed, self-closing cover, watertight when cover is screwed in place. Mounting holes are 2.38 in. (60.3) on centers. Mounting screws and gasket included. Protective rear enclosure/strain relief also included.	HBL332SSX
50 ft. (15.2m) white, vinyl jacketed power supply cord with female (boat side) end only; other end blunt cut.	HBL332CSW
Yellow locking connector replacement end for HBL332CSW. IP20 suitability.	HBL332CRCX
White Seal-Tite® cover with threaded sealing ring for use with HBL316CRCX and HBL332CRCX connector bodies. IP55 suitability.	HBL60CM33W
Yellow Seal-Tite® cover with threaded sealing ring for use with HBL316CRCX and HBL332CRCX connector bodies. IP55 suitability.	HBL60CM33


HBL316NM
HBL332NM

HBL316SSX
HBL332SSX

HBL316CSW25
HBL316CSW
HBL332CSW

HBL316CRCX
HBL332CRCX

HBL60CM33
HBL60CM33W
HUBBELL®
 Wiring Device-Kellems

www.hubbell-marine.com
