

Cable, Cord and Hose Reels

Weatherproof and Static Discharge Reels



Weatherproof Cable and Static Discharge Reels

Description	Cable Feet (m)	Volts AC	Cable Type	Amps	Weight Lbs. (kg)	Catalog Number
14" weatherproof reel.	50 (15.2)	600	14/3 SOW-A	15	55 (24.9)	HBL501431W*
16" weatherproof reel.	50 (15.2)	600	12/3 SOW-A	20	80 (36.3)	HBL501232W*
16" weatherproof reel.	50 (15.2)	600	12/4 SOW-A	16	86 (39.0)	HBL501242W*
16" weatherproof reel.	50 (15.2)	600	10/3 SOW-A	25	86 (39.0)	HBL501032W*
16" weatherproof reel.	50 (15.2)	600	10/4 SOW-A	20	92 (41.7)	HBL501042W*
Static discharge reel.	50 (15.2)	-	Single 3/32" Steel	-	12 (5.4)	HBL50SD
Static discharge reel.	50 (15.2)	-	Single 3/32" Steel Nylon Coated	-	13 (5.9)	HBL50SDN
Static discharge reel.	50 (15.2)**	-	Dual (Y) 3/32" Steel	-	13 (5.9)	HBL50YSD
14" pivot base.	-	-	-	-	5 (2.3)	HBL14PB
16" pivot base.	-	-	-	-	13 (5.9)	HBL16PB
Replacement stop.	-	-	-	-	.2 (.09)	HBLWPBS


Notes: * All weatherproof cable reels are supplied with wire leads and 3/4" N.P.T. hub feed.
 ** 35 ft./10.6m + Dual 15 ft./4.5m for "Y".
 Power supply cable not supplied.

Weatherproof Cable Reels

Listings/Certifications	UL 355 and CSA, C22.2 No. 21.
Environment	Type 4X enclosure, CAN/CSA - C22.2 No. 21. Dry indoor and wet and damp outdoor non-hazardous location.

Specifications

Weatherproof Reel	A	B	C	D	E	F	G	H	I	J
14" reel	6.50" (165)	8.12" (206)	16.25" (413)	13.75" (349)	3.00" (76)	12.19" (310)	3.00" (76)	3.00" (76)	3.00" (76)	6.50" (165)
16" reel	6.50" (165)	9.12" (232)	18.25" (464)	15.75" (400)	3.00" (76)	14.19" (360)	6.00" (152)	6.00" (152)	4.94" (125)	6.50" (165)

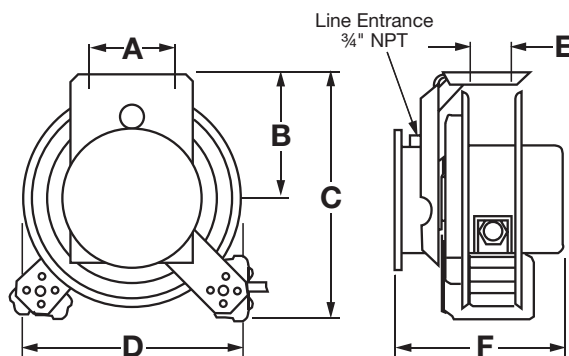

HBL501431W




HBL50SD




HBL14PB

Static Discharge Reel

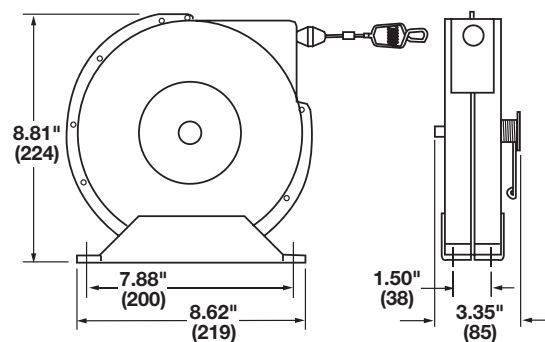

Pivot Base

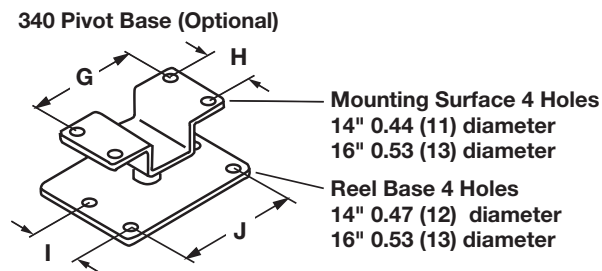

Pivot base for use only with Weatherproof Cable Reel.