



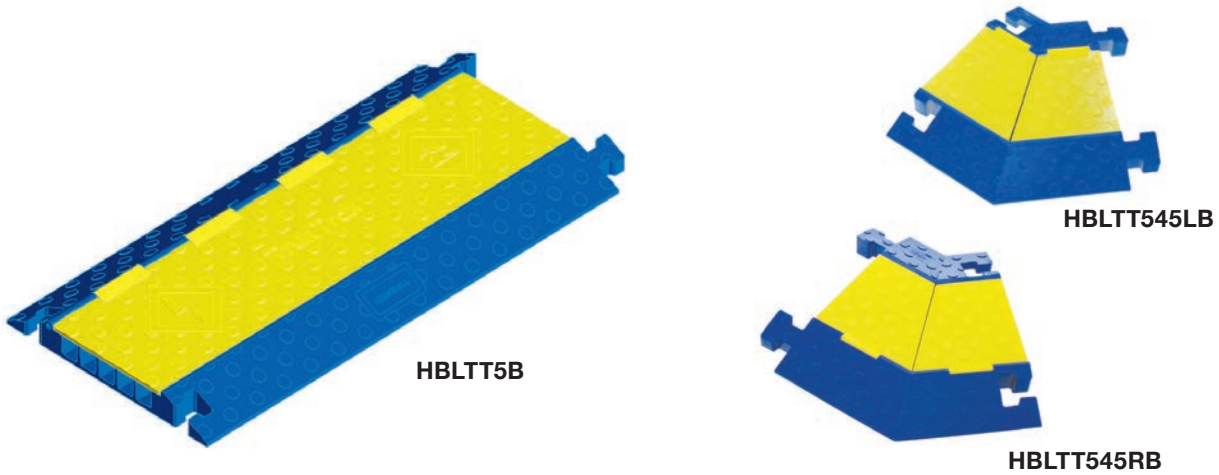

## TrukTrak® System

|                                                         | A                  | B                 | C                  | D                 | E                  |                     |                                  |
|---------------------------------------------------------|--------------------|-------------------|--------------------|-------------------|--------------------|---------------------|----------------------------------|
|                                                         | Channel            |                   |                    |                   |                    |                     |                                  |
| Description                                             | Length<br>in. (mm) | Width<br>in. (mm) | Height<br>in. (mm) | Width<br>in. (mm) | Height<br>in. (mm) | Weight<br>lbs. (kg) | Catalog Number                   |
| 5 Channel TrukTrak®, blue and yellow.                   | 36.0" (914)        | 20" (508)         | 2.31" (58.7)       | 1.25" (31.8)      | 1.25" (31.8)       | 30.60 (13.9)        | <b>HBLTT5B</b>                   |
| 5 Channel TrukTrak® end caps<br>(pair only), yellow.    | 7.50" (190)        | 20" (508)         | 2.31" (58.7)       | 1.25" (31.8)      | 1.25" (31.8)       | 8.55 (3.9)          | <b>HBLTT5ECB</b><br>(Female end) |
|                                                         | 5.25" (133)        | 20" (508)         | 2.31" (58.7)       | 1.25" (31.8)      | 1.25" (31.8)       | 8.55 (3.9)          | (Male end)                       |
| 5 Channel 45° right turn TrukTrak®,<br>blue and yellow. | 25.0" (635)        | 20" (508)         | 2.31" (58.7)       | 1.25" (31.8)      | 1.25" (31.8)       | 15.35 (7.0)         | <b>HBLTT545RB</b>                |
| 5 Channel 45° left turn TrukTrak®,<br>blue and yellow.  | 25.0" (635)        | 20" (508)         | 2.31" (58.7)       | 1.25" (31.8)      | 1.25" (31.8)       | 14.45 (6.6)         | <b>HBLTT545LB</b>                |
| 3 Channel TrukTrak®, blue and yellow.                   | 36.0" (914)        | 20" (508)         | 3.05" (77.5)       | 2.25" (57.2)      | 2.25" (57.2)       | 30.85 (14.0)        | <b>HBLTT3B</b>                   |
| 3 Channel TrukTrak® end caps<br>(pair only), yellow.    | 8.25" (209)        | 20" (508)         | 3.05" (77.5)       | 2.25" (57.2)      | 2.25" (57.2)       | 10.25 (4.6)         | <b>HBLTT3ECB</b><br>(Female end) |
|                                                         | 6.38" (162)        | 20" (508)         | 3.05" (77.5)       | 2.25" (57.2)      | 2.25" (57.2)       | 10.25 (4.6)         | (Male end)                       |
| 2 Channel TrukTrak®, blue and yellow.                   | 36.0" (914)        | 22" (559)         | 4.13" (104.9)      | 3.25" (82.6)      | 3.25" (82.6)       | 41.00 (18.6)        | <b>HBLTT2B</b>                   |

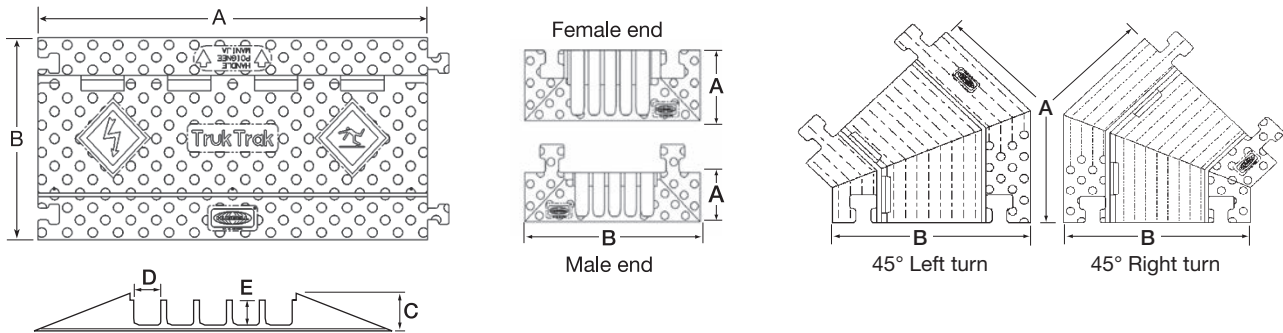

## Features

High density polyurethane construction.  
 Modular interlocking design.  
 Safety surface pattern.  
 Safety blue and yellow colors.

## Benefits

Supports heavy loads and is weather resistant.  
 Easy installation, breakdown and storage.  
 Reduces slipping and skidding.  
 High visibility.

## Specifications

|                       |                                   |
|-----------------------|-----------------------------------|
| Material              | Polyurethane.                     |
| Operating Temperature | -40°F to +120°F (-40°C to +49°C). |
| Hinge Material        | Reinforced fiberglass.            |
| Safety Symbols        | Per ANSI Z535.3.                  |

## Load Capacity

| No. of<br>Channels | Test Fixture Footprint<br>Inches (mm) | Measured Load lbs. (N) +/- 20% |                |
|--------------------|---------------------------------------|--------------------------------|----------------|
|                    |                                       | 70°F (21°C)                    | 120°F (49°C)   |
| 5                  | 6.9" x 17.3" (175 X 439)              | 20,150 (89,627)                | 9,200 (40,921) |
| 3                  | 6.9" x 17.3" (175 X 439)              | 14,210 (63,206)                | 4,653 (20,696) |
| 2                  | 6.9" x 17.3" (175 X 439)              | 10,880 (48,394)                | 2,095 (9,318)  |

Dimensions in Inches (mm)