


PRODUCT DATASHEET

WALL PACK OPTI-SELECT 100W 120-347V D 8 3CCTWARM ADJ WH P

WALL PACK CUTOFF OPTI-SELECT | Cutoff Wall Pack with selectable CCT, wattage and beam angle

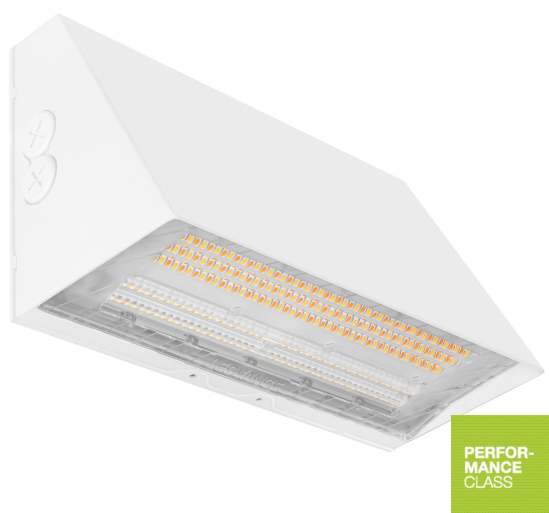

Areas of application

- Walkways
- Building facades
- Perimeters
- Commercial buildings
- Schools

Product features

- OPTI-SELECT: Adjustable types 2, 3, and 4 distribution, no lens swap needed
- Up to 150 LPW
- CRI > 80
- Selectable wattage and lumen output
- DLC Premium: assures high energy efficient & eligible for utility rebates
- CONTROLS READY: sensor receptacle for standalone and LEDVANCE LINK, no wiring
- Integrated photocell that can be disabled in the field
- UV stabilized polycarbonate lenses, vandal resistant
- CCT Options vary per model: Selectable 3000/4000/5000K, Selectable Warm Spectrum 1800/2200/2700K or de-amber
- DarkSky Approved versions: sustainable luminaires designed to minimize light pollution and minimize environmental impact

TECHNICAL DATA

Additional product data

Ordering Abbreviation	WALPAKCPS100UNHD8SC15ADJWHP
Abbrev. With Packaging Info.	WALPAKCPS100UNHD8SC15ADJWHP 1/CS 1/SKU
NAED	67139
Family Brand Name	PERFORMANCE CLASS™
General Description	WALL PACK CUT OFF OPTISELECT PERFORMANCE CLASS, SELECTABLE WATTAGE 60/80/100W, SELECTABLE CCT 1800/2200/2700K, WHITE, PHOTOCELL, 120-347V
Warranty	5 years

Electrical data

Nominal Wattage	60.00/80.00/100.00 W
Nominal voltage	120.00...347.00 V
Power factor	≥0.90
Total Harmonic Distortion	< 20 %

Photometrical data

Lumens	6900/9200/11500 lm
Efficacy	115 lm/W
Color Temperature/CCT	1800/2200/2700 K
Luminaire Type	Wall pack

Dimensions & Weight

Length	13.35 in
Width	5.87 in
Height	8.27 in
Product weight	6.17 lb

Materials & Colors

Luminaire Finish	White
Housing color	White
Housing	Aluminum
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-40...+50 °C
Maximum Operating Temperature	122 °F
Minimum Operating Temperature	-40 °F
Dimming	Yes

Type of Dimming	0-10V
Mounting	Surface
Indoor/Outdoor	Outdoor
Replaceable light source	No
Primary Lamp Type	SMD

Lifespan

Average Rated Life (hr)	100000
-------------------------	--------

Logistical data

Case Qty	1
Case Length (in)	15.866
Case Width (in)	10.669
Case Depth (in)	8.465
Case Cube (ft)	0.829
Case Weight (lbs)	7.207
Pallet Qty	50

Certificates & Standards

Certification Listing	RoHS / CSA / FCC / cULus
Replaceable light source (EPREL)	Not replaceable

Optional accessories

Product image	Product name	UPC
	WALL PACK OPTI-SELECT VISOR WHITE	OS67372

DOWNLOAD DATA

Spec Sheets and Product Documents		Document name
	Installation Guide	Install Manual Wall Pack Cutoff OPTI-SELECT Warm Spectrum
	Product Family Spec Sheet	LEDVANCE Luminaires WALL PACK CUTOFF OPTI-SELECT
Photometric and lighting design files		Document name
	IES file (IES)	WALL PACK WARM SPECTRUM IES LM79 SPD

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.