

16D26-UO

Male Plug, 1/0 - 2/0 AWG, Crimp Tube Termination

16 Series Taper Nose Cam-Type Male Plug, Contact & Insulator, Detachable, Crimp Tube Termination, 1/0 – 2/0 AWG, 220 Amp Max, Type 3R When Mated, Orange

ROHS Compliant : Yes

Leviton's Rhino-Hide Single Pole Cam-Type Connectors supply temporary electrical power for both indoor and outdoor applications. These devices are designed for easy assembly and disassembly, without special tools.

- Single or double set screw or crimp tube termination
- NEMA 3R rated for outdoor use when mated
- Designed with cylindrical profile to reduce snap
- UL: 1691, 508 – 35k A / 600V Short Circuit Current Rating
- Color-coding provides fast and easy phase identification
- Common applications: entertainment, oil and gas, mining operations, power distribution, construction sites, and other temporary power applications

Technical Information

Electrical Specifications

Max. Amperage : 220 Amp

Max. Voltage : 600 Volt

Mechanical Specifications

Cable Range : 1/0-2/0 AWG

Connection Type : Crimped

Gender : Male

Standards and Certifications

CSA Standard : 1691

NEMA Rating : Type 3R

UL : 1691, 508 – 35k A / 600V Short Circuit Current Rating

Material Specifications

Contacts : Brass

Strain Relief : Copper Wire

Product Features

Color : Orange




Color :  Orange

UPC Code : 078477846155

Country Of Origin : Mexico

Available Colors :

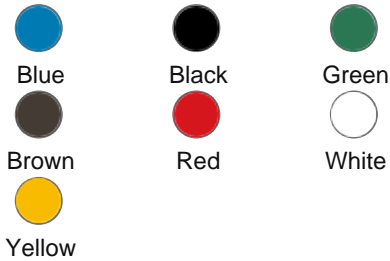

SPECIFICATION SUBMITTAL

<p>JOB NAME:</p> <input style="width: 90%; height: 20px;" type="text"/> <p>JOB NUMBER:</p> <input style="width: 90%; height: 20px;" type="text"/>	<p>CATALOG NUMBERS:</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; height: 20px;"><input style="width: 95%; height: 100%;" type="text"/></td> <td style="width: 50%; height: 20px;"><input style="width: 95%; height: 100%;" type="text"/></td> </tr> <tr> <td style="width: 50%; height: 20px;"><input style="width: 95%; height: 100%;" type="text"/></td> <td style="width: 50%; height: 20px;"><input style="width: 95%; height: 100%;" type="text"/></td> </tr> </table>	<input style="width: 95%; height: 100%;" type="text"/>	<input style="width: 95%; height: 100%;" type="text"/>	<input style="width: 95%; height: 100%;" type="text"/>	<input style="width: 95%; height: 100%;" type="text"/>
<input style="width: 95%; height: 100%;" type="text"/>	<input style="width: 95%; height: 100%;" type="text"/>				
<input style="width: 95%; height: 100%;" type="text"/>	<input style="width: 95%; height: 100%;" type="text"/>				

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)
5386- 1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without
notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts

© 2024 Leviton Manufacturing Co., Inc.