


# 16R26-1UH

Color :  Brown

UPC Code : 078477718148

Country Of Origin : Mexico

**Available Colors :**

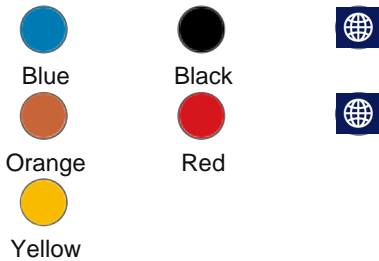

Female Receptacle, 90-Degree, #2 - 4/0 AWG, 1.125" Threaded Stud Termination

16 Series Female Panel Receptacle, Cam-Type, Self-Clinching Nut, 90-Degree, Threaded Stud Length - 1.125", Taper Nose, 400 Amp Max, Cable Range - #2 to 4/0 AWG, Brown

**ROHS Compliant :** Yes

Leviton's Rhino-Hide Single Pole Cam-Type Connectors supply temporary electrical power for both indoor and outdoor applications. These devices are designed for easy assembly and disassembly, without special tools.

- Single or double set screw or crimp tube termination
- NEMA 3R rated for outdoor use when mated
- Designed with cylindrical profile to reduce snap
- UL: 1691, 508 – 35k A / 600V Short Circuit Current Rating
- Color-coding provides fast and easy phase identification
- Common applications: entertainment, oil and gas, mining operations, power distribution, construction sites, and other temporary power applications

**Technical Information**

Electrical Specifications                      Material Specifications

**Max. Amperage :** 400 Amp

**Contacts :** Brass

**Max. Voltage :** 600 Volt

Mechanical Specifications

Product Features

**Cable Range :** 2-4/0 AWG

**Color :** Brown

**Gender :** Male

**Stud Length :** 1.25"

Standards and Certifications

**CSA Certified :** File 152105|  
CSA: 1691

**NEMA Rating :** Type 3R

**UL Listed :** File E-13399;  
1691, 508 – 35k A / 600V Short  
Circuit Current Rating

**SPECIFICATION SUBMITTAL**

<p>JOB NAME:</p> <input style="width: 90%; height: 20px;" type="text"/> <p>JOB NUMBER:</p> <input style="width: 90%; height: 20px;" type="text"/>	<p>CATALOG NUMBERS:</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border: 1px solid black; height: 20px;"></td> <td style="width: 50%; border: 1px solid black; height: 20px;"></td> </tr> <tr> <td style="width: 50%; border: 1px solid black; height: 20px;"></td> <td style="width: 50%; border: 1px solid black; height: 20px;"></td> </tr> </table>				

**Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.  
T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·  
FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)  
5386- 1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without  
notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/international/contacts](http://www.leviton.com/international/contacts)

**© 2024 Leviton Manufacturing Co., Inc.**