



2410-R

V-0-Max Flush Mtg Locking Receptacle

20 Amp, 125/250 Volt, NEMA L14-20R, 3P, 4W, Flush Mtg Locking Receptacle, Industrial Grade, Grounding - RED

ROHS Compliant : Yes

- Single piece brass contact provides longer life and continuous conductivity vs multi-piece riveted styles
- Extra thick, corrosion resistant nickel plated brass strap
- Amperage, voltage, NEMA configuration, and Manufacturer molded into face lasts longer than stamping and makes for fast, easy identification and replacement
- Terminal identification molded into the body lasts longer than stamping
- Nickel plated brass clamp type terminals support back and side wiring and resist corrosion
- Color-coded voltage ID ring on face for quick visual identification
- UL V-0 flammability rating

UPC Code : 078477333143

Country Of Origin : Mexico

NEMA :  L14-20R

Technical Information

Electrical Specifications

Amperage : 20 A

Current Limiting : Full Rated Current

Dielectric Voltage : Withstands 2000V per UL498

Grounding : Grounding

Pole : 3

Temperature Rise : Max 30C after 250 cycles OL at 200 percent rated current

Voltage : 125/250 VAC

Wire : 4

Environmental Specifications

Flammability : Rated V-0 per UL 94

Operating Temperature : -40° C to 60°C

Material Specifications

Base Material : Nylon

Body Material : Valox 357

Color : Red

Cover Material : Valox 357

Face Material : Nylon

Mechanical Specifications

Product ID : Ratings and NEMA I.D. permanently marked on device

Screw Terminal Torque : 14-18 in-lbs

Terminal Accom. : 14-8 AWG

Terminal ID : Marked on Device

Ground Contacts : Nickel-Plated Brass

Termination : Back

Grounding Screw : Chromated Brass

Line Contacts : Nickel-Plated Brass

Strap Material : Nickel-Plated Brass

Terminal Clamps : Zinc-Plated Brass

Terminal Screws : Nickel-Plated Brass

Product Features

Base Material : Nylon

Brand : V-0-Max

Color : Red

Face Material : Nylon

NEMA : L14-20R

Termination : Back

Warranty : Limited Lifetime Warranty

Warranty

Warranty : Limited Lifetime Warranty

Standards and Certifications

ANSI : C-73

CSA : C22.2 No. 42


NEMA : WD-1 & WD-6

NOM : 057

UL : 498

UL Fed Spec : W-C-596

Wiring Diagram

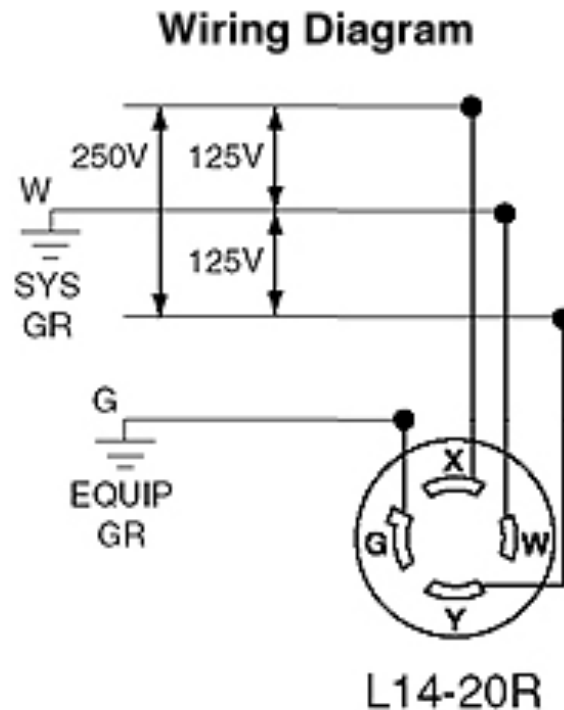

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	<input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.