

# 5362-S2N

20 Amp, 125 Volt, Duplex Receptacle Outlet, Heavy-Duty Industrial Spec Grade

Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Two Outlets Marked "Controlled", Smooth Face, 20 Amp, 125 Volt, Back or Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - Green

**ROHS Compliant :** Yes

Leviton offers custom imprinting solutions to meet the 2014 National Electrical Code requirements for identifying receptacles that will be automatically de-energized as part of an overall plug load control program. All 15A & 20A, 125V receptacles that are automatically controlled will be marked with a specific symbol.

## Technical Information

AC Horsepower Ratings

**At Rated Voltage :** 1 HP

Electrical Specifications

**Amperage :** 20 A

**Dielectric Voltage :**  
Withstands 2000V per UL498

**Grounding :** Self-Grounding

**Pole :** 2

**Temperature Rise :** Max 30C  
after 250 cycles OL at 200  
percent rated current

**Voltage :** 125 VAC

**Wire :** 3

Environmental Specifications

**Flammability :** Rated V-2 per  
UL 94

**Operating Temperature :** -40°  
C to 75°C

Material Specifications

**Body Material :** Nylon

**Face Material :** Nylon

**Ground Clips :** Brass

**Grounding Screw :** Brass 8-32

**Line Contacts :** Triple-Wipe .  
040" High Performance Brass  
Alloy

**Strap Material :** Brass .050"

**Terminal Clamp :** Zinc-Plated  
Steel

**Terminal Screws :** Brass 10-32


Mechanical Specifications

**Product ID :** Ratings are  
permanently marked on device

Product Features

**Color :** Green

**Device Type :** Duplex  
Receptacle Outlet

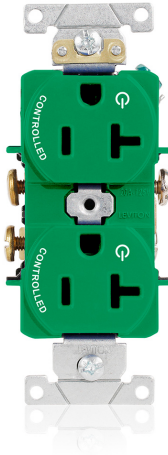


**Color :**  Green

**UPC Code :** 078477722619

**Country Of Origin :** Mexico

**NEMA :**  5-20R

**Available Colors :**

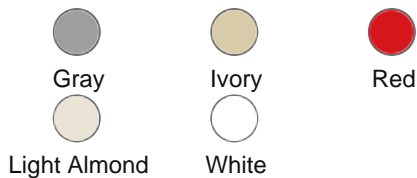

**Screw Terminal Torque** : 14-18 in-lbs

**Feature** : Two Outlets Marked Controlled|Smooth Face

**Terminal Accom.** : 14-10 AWG

**Grade** : Heavy-Duty Industrial Specification Grade

**Terminal ID** : Brass-Hot, Green-Ground, Silver-Neutral

**NEMA** : 5-20R

**Termination** : Back or Side Wire

**Wire Type** : Solid or Stranded Building Wire

Standards and Certifications

Warranty

**ANSI** : C-73

**Warranty** : 10-Year Limited

**Applicable Standards** : UL 498, CSA C22.2 No. 42, FedSpec W-C 596

**Certification/Listing** : UL, CSA, NOM-ANCE

**NEMA** : WD-1 & WD-6

**Patents** \*

MX321216

US8684771

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

**SPECIFICATION SUBMITTAL**

<b>JOB NAME:</b> <input type="text"/>	<b>CATALOG NUMBERS:</b> <input type="text"/> <input type="text"/>	
<b>JOB NUMBER:</b> <input type="text"/>	<input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S. T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 · FAX: +1-800-824-3005 ·

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 ·

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to: [www.leviton.com/company/about-leviton/locations](http://www.leviton.com/company/about-leviton/locations)

