

9151-N



UPC Code : 078477808955

Country Of Origin : Mexico

NEMA :  10-20P

20 Amp, 125/250 Volt, Straight Blade Plug, Industrial Grade

20 Amp, 125/250 Volt, NEMA 10-20P, 3P, 3W, Plug, Straight Blade, Industrial Grade, Non-Grounding, - Black

ROHS Compliant : Yes

Leviton offers industrial, commercial and residential plugs and connectors for unlimited application settings. Plugs and connectors are provided in a range of ratings from 15 Amps to 60 Amps; the product line includes straight-blade and locking devices in all NEMA configurations, as well as locking devices in non-NEMA configurations. Versions include Hospital Grade, isolated ground, WetGuard, Dustguard, Python, power plugs, corrosion resistant plugs and connectors, power-interrupting devices, midget devices, and much more.

Technical Information

AC Horsepower Ratings

At Rated Voltage : 2 HP L-L /
1 HP L-N

Electrical Specifications

Amperage : 20 A

Current Limiting : Full Rated Current

Dielectric Voltage :
Withstands 2000V per UL498

Grounding : Non-Grounding

Pole : 3

Temperature Rise : Max 30C
after 50 cycles OL at 150
percent rated current

Wire : 3

Environmental Specifications

Operating Temperature : -40°
C to 60°C

Material Specifications

Assembly Screws : Steel, Zinc
Plated

Blades/Contacts : Solid Brass

Body Material : Super Tough
Nylon

Color : Black

Mechanical Specifications

Cord Range : .625 - 1.375|.625
- 1.375

Product ID : Ratings are
permanently marked on device

Terminal Accom. : 18-10 AWG

Terminal ID : Brass-Hot,
Green-Ground, White-Neutral

Product Features

Color : Black

Cord Range : .625 - 1.375|.625
- 1.375

NEMA : 10-20P

Torque Range : 10-14 in-lbs

Wire Gauge : 18-10 AWG

Standards and Certifications

ANSI : C-73


CSA C22.2 No. 42 : File LR-406

NOM : 057

UL498 : File E13393

Warranty : Limited Lifetime
Warranty Warranty

Wiring Diagram

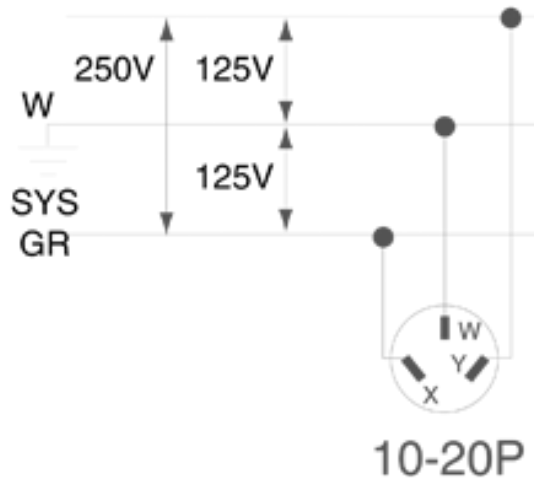

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	<input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.