



# 2776

30 Amp, 347/600 Volt, Flanged Outlet Locking Receptacle, Industrial Grade

30 Amp, 347/600 Volt 3PY, NEMA L20-30R, 4P, 4W, Flanged Outlet Locking Receptacle, Industrial Grade, Non-Grounding - WHITE

**ROHS Compliant** : Yes

- One piece contacts reduce friction and overheating
- Rugged nylon construction resists impact, sunlight, chemicals, and rough use
- Ratings and NEMA I.D. permanently marked on device
- Industry exclusive limited lifetime warranty

**UPC Code** : 078477806517

**Country Of Origin** : Mexico

**NEMA** :  L20-30R

## Technical Information

### AC Horsepower Ratings

**At Rated Voltage** : N/A

### Electrical Specifications

**Amperage** : 30 A

**Current Limiting** : Full Rated Current

**Dielectric Voltage** :  
Withstands 2000V per UL498

**Grounding** : Non-Grounding

**Phase** : 3-Phase WYE

**Pole** : 4

**Temperature Rise** : Max 30C  
after 250 cycles OL at 200  
percent rated current

**Voltage** : 347/600 VAC

**Wire** : 4

### Environmental Specifications

**Environment** : Dry

**Flammability** : Rated V-2 per  
UL 94

**Operating Temperature** : -40°  
C to 60°C

### Material Specifications

**Body Material** : Nylon

**Color** : White

**Face Material** : Nylon

**Grounding Screw** : Brass 8-32

**Line Contacts** : Brass .035  
Thick

**Strap Material** : Thermoplastic  
Nylon

**Terminal Screws** : Brass 10-32

### Mechanical Specifications

**Product ID** : Ratings and  
NEMA I.D. permanently marked  
on device

### Product Features

**Brand** : Black and White

**Color** : White

**Screw Terminal Torque :** 10-14 in-lbs

**Device Type :** Locking Flanged Outlet

**Terminal Accom. :** 18-10 AWG **NEMA :** L20-30R

**Terminal ID :** Brass-Hot, Green-Ground, Silver-Neutral

**Termination :** Back

Standards and Certifications

**ANSI :** C-73

**CSA C22.2 No. 42 :** File LR-406

**NEMA :** WD-6

**NOM :** 057


**UL Fed Spec WC-596 :** File E13399

**UL498 :** File E13399

**Warranty :** Limited Lifetime Warranty

Wiring Diagram

**Wiring Diagram**

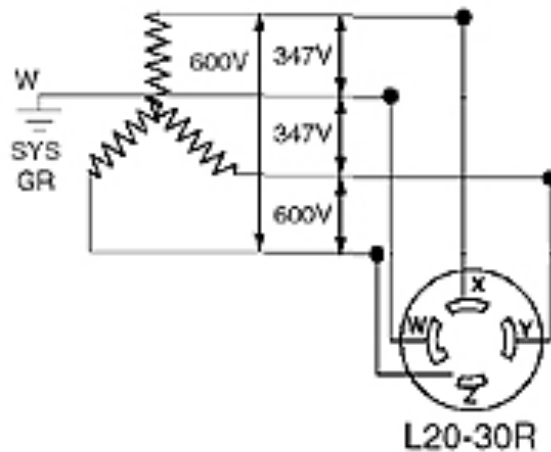

**SPECIFICATION SUBMITTAL**

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	<input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.  
T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·  
FAX: +1-800-824-3005 ·

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)  
5386- 1797 ·

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without  
notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/company/about-leviton/locations](http://www.leviton.com/company/about-leviton/locations)

**© 2026 Leviton Manufacturing Co., Inc.**