



# T5020-GY

Tamper-Resistant Single Receptacle, 20 Amp, 125 Volt

Single Receptacle Outlet, Commercial Specification Grade, Tamper-Resistant, Smooth Face, 20 Amp, 125 Volt, Back and Side Wire, NEMA 5-20R, 2-Pole, 3-Wire - Gray

## Technical Information

### AC Horsepower Ratings

**At Rated Voltage** : 1 HP

### Electrical Specifications

**Amperage** : 20 A

**Current Limiting** : Full Rated Current

**Dielectric Voltage** : Withstands 2000V per UL498

**Pole** : 2

**Temperature Rise** : Max 30C after 250 cycles OL at 200 percent rated current

**Voltage** : 125 VAC

**Wire** : 3

### Environmental Specifications

**Operating Temperature** : -40° C to 60°C

### Material Specifications

**Body Material** : Thermoplastic Nylon

**Clamp Nuts** : Zinc-Plated Steel

**Color** : Gray

**Face Material** : Thermoplastic Nylon

**Ground Clips** : Brass-Plated

**Grounding Screw** : Brass 8-32

**Line Contacts** : Brass Triple-Wipe

**Strap Material** : Zinc-Plated Steel

**Terminal Screws** : Brass 10-32

### Mechanical Specifications

**Product ID** : Ratings are permanently marked on device

**Screw Terminal Torque** : 14-18 in-lbs

**Terminal Accom.** : 14-10 AWG

**Terminal ID** : Brass-Hot, Green-Ground, Silver-Neutral

### Product Features

**Color** : Gray

**Device Type** : Single Receptacle Outlet

**Feature** : Tamper-Resistant|Smooth Face

**Grade** : Commercial Specification Grade

**NEMA** : 5-20R

**Color** :  Gray

**UPC Code** : 078477760949

**Country Of Origin** : Mexico

**NEMA** :  5-20R

### Available Colors :

  
Brown  
  
White

  
Ivory

  
Light Almond

**Termination** : Back and Side Wire

Standards and Certifications

**ANSI** : C-73

**CSA C22.2 No. 42** : File 152105


**NEMA** : WD-6

**NOM** : 057

**UL498** : File E13399

**Warranty** : 10-Year Limited

Wiring Diagram

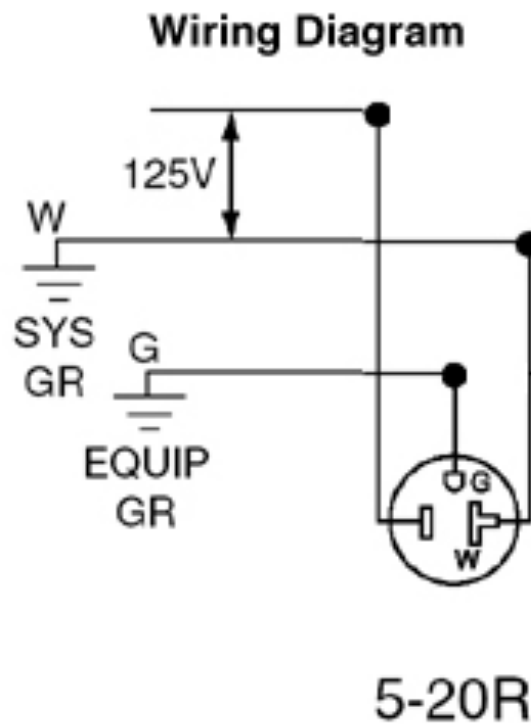

**SPECIFICATION SUBMITTAL**

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	<input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 ·

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/company/about-leviton/locations](http://www.leviton.com/company/about-leviton/locations)

**© 2026 Leviton Manufacturing Co., Inc.**