

LED SLIM AREA LIGHTS AR SERIES, GENERATION 2

Fixture shown with
Slipfitter Knuckle



60W Model

Fixture shown with
Trunnion Swivel



100-140W Model

Fixture shown with
Straight Arm



210-280W Model



FEATURES:

- Replaces up to 750W MH/HPS equivalent
- Universal 120-277V dimming driver standard, 347-480V available
- Dusk-to-dawn and occupancy sensor capability
- Greater than 100,000 hour L90 lifetime at TM21 standards at 25°C
- 10kV surge suppression standard
- Comes with 41" 18/3 SO cord

MOUNTING:

- 7.5" Straight Arm¹
- Trunnion Swivel
- 2-3/8" Slipfitter Knuckle

WARRANTY:

10 Year warranty. Check maxlite.com/warranties for details.

CONTROLS:

PC Option: NEMA standard C136.41 3-pin twist lock receptacle for use with NEMA twist lock photocell. **The photocell is sold separately.**

Photo/Motion Sensor: The FSP-211 uses passive infrared (PIR) sensing technology to react to changes in infrared energy (i.e. moving body heat) within the coverage area. This slim, low-profile sensor is designed for installation inside the bottom of a light fixture body and is ideal for outdoor environments. The sensor operates at 120V/230V-240V and single phase 277V. The motion sensor is fully adjustable with high and low dimmed light level options with optional dusk to dawn control. Sensor can be combined with various lenses to operate at mounting heights from 8' to 40'. Please refer to page 4 for the sensor's factory default settings. Factory settings can be adjusted via the FSIR-100, a wireless configuration tool. **Note that the sensor comes with photocell setting disabled and the FSIR-100 must be purchased if photocell functionality is desired.**

Please refer to the FSP-211 Supplementary Datasheet for more product information.

DIMENSIONS: Please see page 3 and 4 for dimension drawings.

PRODUCT DESCRIPTION:

The LED Slim Area Lights deliver class-leading efficacy in a lightweight design that can be effortlessly applied to new and retrofit outdoor projects. Offered in lumen packages ranging from 7,700lm to over 35,000lm, the AR Series achieves up to 130 lumens per watt while providing significant long-term energy and maintenance cost savings.

MODEL SELECTION				Typical order example: AR60UT5-50BK				
AR				-				
FAMILY	NOMINAL WATTAGE	VOLTAGE	DISTRIBUTION	-	CCT	FINISH	MOUNTING	OPTIONS
AR= Area Light	60= 60W,250W MH/HPS equivalent 100= 100W, 400W MH/HPS equivalent 140= 140W, 400W MH/HPS equivalent 210= 210W, 750W MH/HPS equivalent 280= 280W, 750W MH/HPS equivalent	U= 120-277V H= 347-480V	T2= Type II T3= Type III T4= Type IV T5= Type V	-	40= 4000K 50= 5000K	B= Bronze <i>Contact Maxlite for additional finishes</i>	A= Straight Arm ¹ K= 2-3/8" Slipfitter Knuckle T= Trunnion Swivel	(OMIT)= None MS= Daylight/Motion Sensor RPC= NEMA 3-pin receptacle (NEMA twist lock Photocell sold separately) PR7= NEMA 7-Pin receptable (control module sold separately)

NOTES:

1. The straight arm mounting fits square poles. For compatibility with round poles, combine the straight arm mounting with a round pole adaptor. See adaptor selection table on page 3.


SPECIFICATIONS:

SPECIFICATIONS:				60 WATT		100 WATT		140 WATT		210 WATT		280 WATT	
ITEM	SPECIFICATION			DETAILS									
GENERAL PERFORMANCE	Input Power (W)			60W	100W	140W	210W	280W					
	Type II	4000K	Lumens	7846	12420	17014	25633	34547					
			BUG Rating	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3				
		5000K	Lumens	7860	12675	17922	26756	35886					
			BUG Rating	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3			
	Type III	4000K	Lumens	7900	12420	17014	25663	34547					
			BUG Rating	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3			
		5000K	Lumens	7900	12675	17922	26756	35886					
			BUG Rating	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3			
	Type IV	4000K	Lumens	7615	12421	17015	25663	34548					
			BUG Rating	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B5-U0-G5				
		5000K	Lumens	7699	12675	17922	26756	35886					
			BUG Rating	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B5-U0-G5				
	Type V	4000K	Lumens	7787	12420	17014	25663	34547					
			BUG Rating	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1			
		5000K	Lumens	7860	12675	17922	26756	35886					
			BUG Rating	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1			
	Efficacy (lm/W)			up to 130 lm/W									
	CRI			> 70									
	Lumen Maintenance (L90, TM21 @ 25°C)			> 100,000 hours									
	Color Temperature			4000K and 5000K available									
	Power Factor			> 0.9									
	THD			< 16%									
ELECTRICAL	Input Voltage Range			120-277V standard, 347-480V available									
	Housing			Die-cast aluminum									
	Lens			Polycarbonate lens									
PHYSICAL	Housing			2-3/8" Slipfitter, Straight Arm, Trunnion Swivel									
	Lens			Type II, Type III, Type IV, Type V - Frosted lens									
	Mounting			Slip Fitter, Straight Arm, Trunnion Mount options									
	Dimensions (Module)			15.9"x8.7"x3.4"	16.9" x 10.3" x 3.4"				16.6" x 15.0" x 3.5"				
	Weight			8.5 lbs	11.8 lbs	12.5 lbs	22.5 lbs	23.9 lbs					
	EPA (sq. ft) 0°/90°			0.43/1.34	0.43/1.64				0.49/2.26				
	Operating Temperature			-40°F to 122°F (-40°C to 50°C)									
QUALIFICATIONS	Qualifications			cULus, supports T24 compliance									
	Material Usage			RoHS compliant; no mercury									
	Environment			Outdoor, Wet location, IP65 rating									
	Warranty			10 Year warranty. Check maxlite.com/warranties for details.									


ACCESSORIES:

ORDER CODE	MODEL	DESCRIPTION
107846	AR-MAL-4RPA	4" Round Pole Adaptor for AR-MAL Series, to be used with straight arm
107847	AR-MAL-5RPA	5" Round Pole Adaptor for AR-MAL Series, to be used with straight arm
105038	PCTL-UNV	Twist-Lock Electronic Photocontrol 120/208/240/277V
1408292	6394LL	NEMA Twist-Lock Photo Control 347V-480V
96268	MLRTLPCRSP	Shorting cap for NEMA Twist Lock receptacle (3, 5 or 7 pin)
103658	AR-S-HS-GEN2-B	House Side Shield for AR GEN 2 Series, Bronze Finish, Small Size compatible with 60W/100W/140 Models
1408946	AR-MAL-L-HS-B	House Side Shield for AR-MAL Series, Bronze Finish, Large Size compatible with 210 W/280W Model
102944	UPMA-B	Universal Pole Mount Adaptor, Bronze, hardware and gasket included
102945	UPMA-S	Universal Pole Mount Adaptor, Silver, hardware and gasket included
102225	UPMA-4RPA-B	Round Pole Adaptor for 4" pole for Universal Pole Mount Adaptor
102976	UPMA-5RPA-B	Round Pole Adaptor for 5" pole for Universal Pole Mount Adaptor
102184	FSIR-100	Remote Hanheld Configuration Tool
72055	PCTL-UNV	Twist-Lock Electronic Photocontrol 120/208/240/277V (requires RPC fixture option)
1408292	PCTL-HV	Twist-Lock Electronic Photocontrol 480V (requires RPC fixture option)

DIMENSIONS:

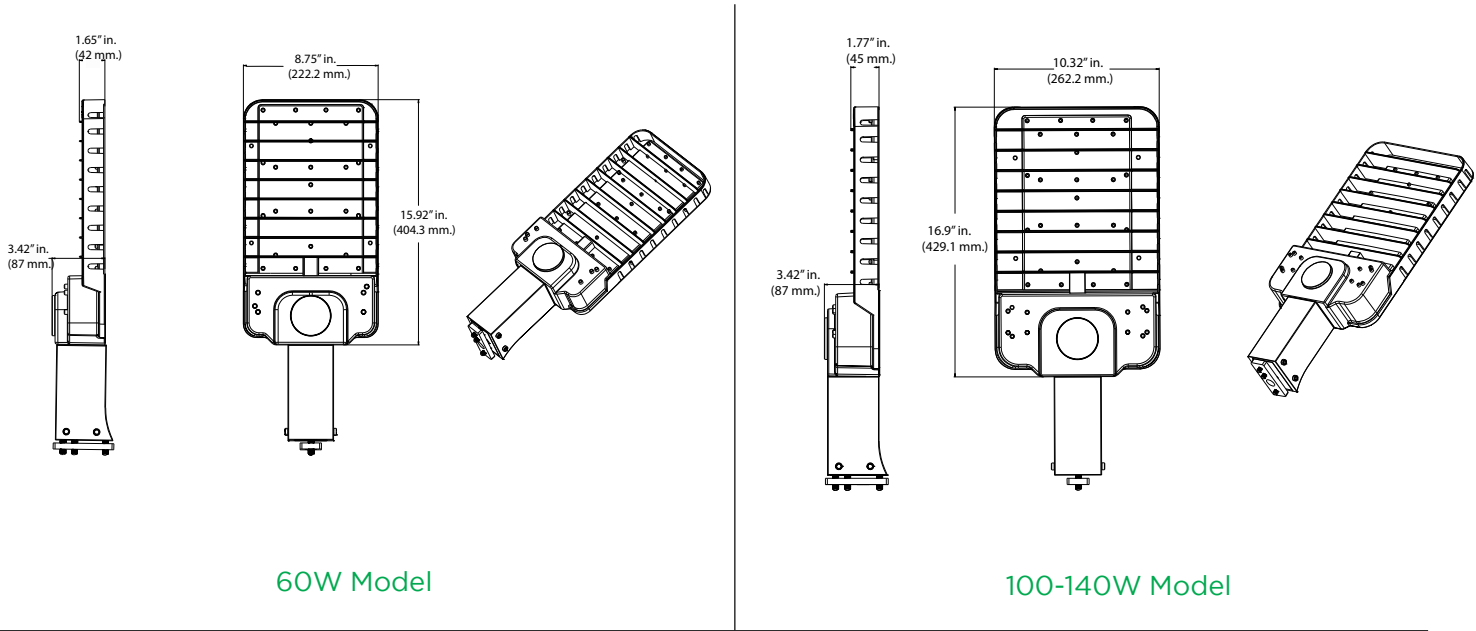


DIMENSIONS:

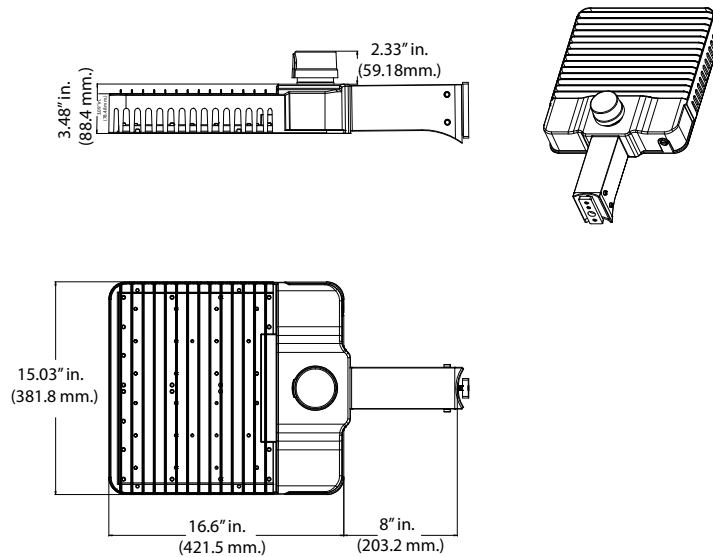


210-280W Model

MOUNTING DIMENSIONS:

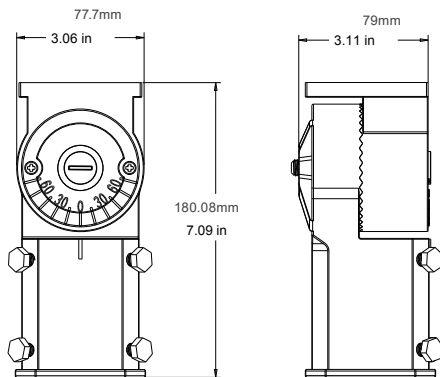

Slip Fitter Knuckle



Straight Arm



Trunnion Swivel

