

PROJECT NAME: _____


CAT. #: _____

NOTES: _____


FIXTURE SCHEDULE: _____

PathMAX™ Slim Bollards

CCT Selectable

Round Dome
Type VSquare
Type VRound Dome
LouverRound Flat
LouverRound Flat
Type V

Sensor/Photocell

CCT
Selectable
Switch

Product Description:

The PathMAX™ Slim LED Bollards offer a modular design with field selectable color temperatures (3000K, 4000K, 5000K) that simplify the product choice for distributors and contractors. Available in round and square silhouettes, the bollards are controls ready and designed with a specialized optics that projects light down and outward for ample illumination on walkways.

Features:

- CCT Selectable 3000K, 4000K & 5000K
- Modular design with field replaceable heads and shafts
- Lengths: 42" , 36"
- Distributions / optics: Cone reflector (Type V), louver
- Vandal resistant screws

Dimming:

- 120-277V option available with 0-10V dimming (0%)
- Network controls can dim down to 15%

Construction:

- Die-cast aluminum body
- Clear Polycarbonate lens

Mounting:

- Mounting kit available standard with each bollard (includes mounting base, anchor bolts, nuts and washers)
- Option available to pre-ship Mounting Kit as an additional accessory

Listings:

- UL Listed for Wet Locations, Outdoor
- DLC Premium: Not all product variations listed on this page are DLC qualified. Visit <https://www.designlights.org/search/> to confirm qualification

Controls Ready:

Simple plug and play Sensor Receptacle/Socket enables installation of c-Max control nodes, photocell and motion sensor without changing the fixture.

Ordering Information

FAMILY	-	SUB FAMILY	SHAPE	STYLE	WATTAGE	VOLTAGE	CCT	DISTRIBUTION	HEIGHT	FINISH	CONTROLS
BL= PathMAX™ Bollard, Slim Series		CL= Classic	R= Round S= Square	D= Dome Top F= Flat Top	22= 22W	U= 120-277V	CS= 3000/ 4000/ 5000K	BLANK= Type V LR= Louvers	BLANK= 42" 36= 36"	B= Bronze <i>Contact Maxlite for custom finishes</i>	² CR= Controls Ready port

¹Only available as a Flat Top, Type V distribution, 42" model

²Only available with 42" height

DLC ID

MODEL NUMBER	DLC ID
BL-CLSF22UCSB[BLANK; CR]	PLANH2MJUG7Y
BL-CLRD22UCS[BLANK, 36]B[BLANK; CR]	PLGLA1VO1NH
BL-CLRF22UCS[BLANK, 36]B[BLANK; CR]	PLZNC7TMOEDP

*Louver models are not DLC qualified.
Visit <https://www.designlights.org/search/> to confirm qualification of other product variations.

Accessories

MODEL NUMBER	ORDER CODE	DESCRIPTION	IMAGE
CN-REMOTE	105567	Control Node Remote Control	
CN-RDMSB	105566	Control Node Round, PIR Motion Sensor/Photocell, Bronze, IP66	
CN-RDPCB	105569	Photocell Node Round, Bronze, IP66	
NN-RDB	105897	Network Node Round, Bronze	
NN-RDMPB	108255	Network Node Round, PIR Motion Sensor, Photocell, Bronze	
BL-CLSF22BASEKIT*	108292	PathMax Slim Square Bollard, Template and Anchor Bolts Kit	
BL-CLRX22BASEKIT*	108293	PathMax Slim Round Bollard, Template and Anchor Bolt Kit	

*To pre-ship order in addition to the fixture. Discard mounting kit that comes with the fixture.



5-year standard warranty with labor allowance* (further details available at www.maxlite.com/warranties)

Phone: 1-800-555-5629

Fax: 973-244-7333

Web: www.maxlite.comE-mail: info@maxlite.com

PLM# 640

Rev: 03/07/23

PathMAX™ Slim Bollards

CCT Selectable

Dimmers


LEVITON	DD710-BDE, IP-710-LFZ, DS710-10E
LUTRON	DVTV-WH, DVSTV-453P

Specifications

	BL-CRSF22UCSB (Square, Type V)	BL-CLRx22UCSxxB (Round, Type V)	BL-CLR22UCSLRB (Round, Louver)
Power Consumption (W)	22W		
Lumens Delivered (lm)	2860	2860	1320
Efficacy (lm/W)	130	130	60
CRI	≥80		
CCT (K)	CCT Selectable 3000K, 4000K & 5000K		
BUG Rating	B1-U3-G1		B1-U3-G2
L70 Lifetime (hrs)	≥50,000 Hrs		
Input Voltage	120-277Vac, 50/60Hz		
Power Factor	≥0.9		
Operating Temperature	-40°F - 122°F (-40°C - 50°C)		
Listings	DLC Premium, UL Listed, IP65		
Environment	Outdoor, Wet location		
Warranty	5 year warranty		

Dimensions:


Bollard	A (H)	B (W)
42" Square	42.00"	6.30"
42" Round Flat Top	42.00"	
42" Round Dome Top	43.66"	
36" Round Flat Top	36.00"	
36" Round Dome Top	37.68"	

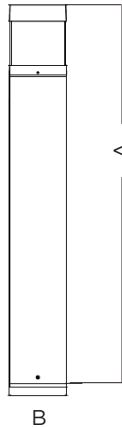

Square




Round Flat Top

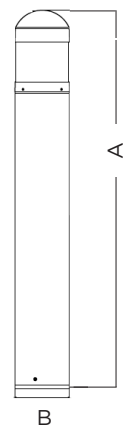


Round Dome Top

Mounting Kit Details: (Included standard)



Round

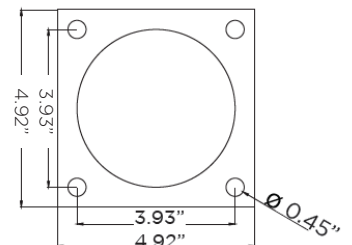

Square

PathMAX™ Slim Bollards

CCT Selectable

ISOFOOTCANDLE:


Each gridline represents one mounting height.

For mounting heights other than noted multiply FC by the below factor.


$$\text{Factor} = \frac{(\text{Chart's Mtg Height})^2}{(\text{Actual Mtg Height})^2}$$

LEGEND


0.5 fc	5 fc
1 fc	10 fc
2 fc	20 fc

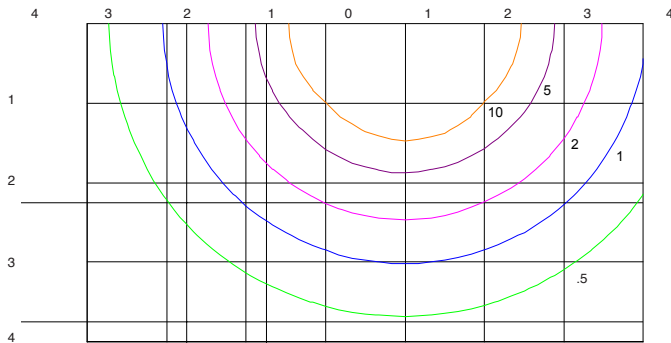


42" SQUARE

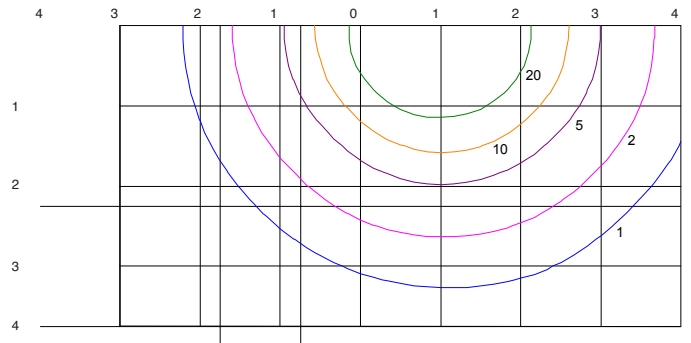


36" ROUND TYPE V

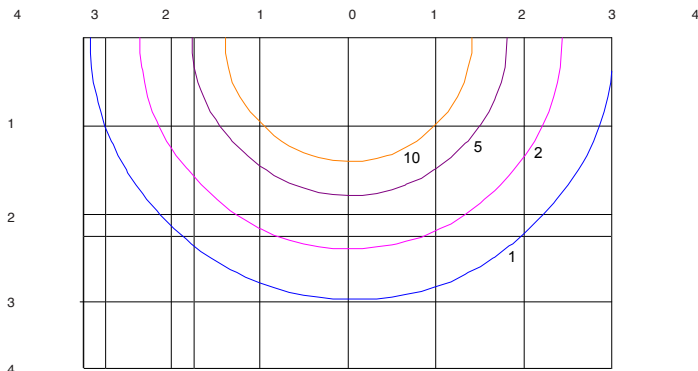

42" ROUND TYPE V

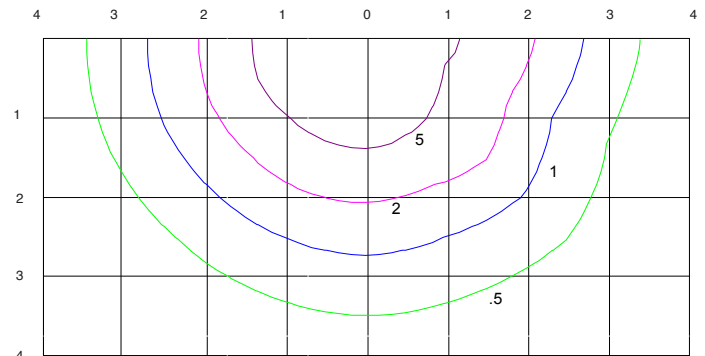

36" LOUVER

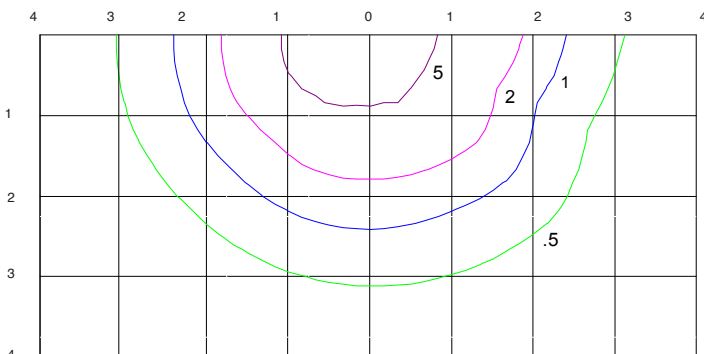

42" LOUVER