

PROJECT NAME: _____

CAT. #: _____

NOTES: _____

FIXTURE SCHEDULE: _____

Bollards – Mushroom Style

Wattage/CCT Selectable



Flat Top

Dome Top

Product Description:

The Bollard Mushroom Style is a stylish fixture with two head shapes - flat or dome. They are wattage and CCT selectable with a photocell option. These fixtures are a perfect way to light or mark paths and walkways.

Features:

- Wattage Selectable between 20/28/37W
- CCT Selectable between 3000, 4000 or 5000K
- 42" height standard (shorter heights available)
- 120-277V standard, 480V option
- 8" diameter shaft
- Extruded Aluminum with corrosion resistant powder coat finish
- UV Stabilized impact resistant polycarbonate lens
- 4kV Surge Protection
- -20°C battery backup option available

Mounting:

- Anchor bolts included or can be pre-shipped
- Slotted mounting plate to match existing anchor bolt patterns for retrofits

Ordering Information

FAMILY	WATTAGE	VOLTAGE	-	W SELECT	CCT	FINISH	OPTICS	OPTIONS
BMD= Bollard, Mushroom Dome Top	37= 37/28/20W	U= 120-277V		W= Wattage Selectable	CS= CCT Selectable 3000/4000/5000K	B= Bronze Contact Maxlite for custom finishes	BLANK= Type V	BLANK= No Options
BMF= Bollard, Mushroom Flat Top		H= 480V						PC= Photocell E2= -20°C Battery Backup

DLC 5.1 Listing

MODEL NUMBER	DLC PRODUCT ID#	DLC CLASSIFICATION	DLC PRIMARY USE DESIGNATION
BM[F,D]37U-WCS[ALL OPTIONS]	S-6MWSVR	Premium	Bollards


PathMAX™ Slim Bollards

Wattage/CCT Selectable

Accessories:

ORDER CODE	MODEL NUMBER	DESCRIPTION
112953	BL-BOLTKIT-3	ANCHOR BOLT KIT FOR 3 BOLT PATTERN SLIM ROUND BOLLARDS

NOTE: Anchor bolts are included with fixtures standard, refer to the accessory chart above when pre-shipment of anchor bolts is desired.

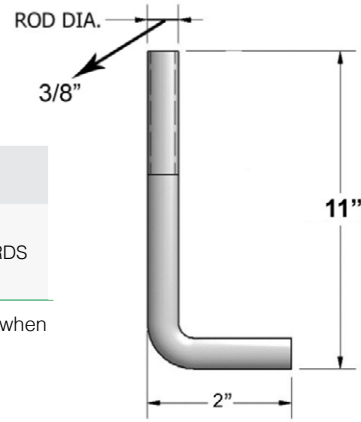

BL-BOLTKIT-3

Anchor Bolt Kits Include 3/8" x 11" anchor bolts, hex nuts & washers.

Specifications

	Mushroom Bollards – Dome & Flat
Power Consumption (W)	20/28/37W (37W default)
Lumens Delivered (lm)*	4,730-4,840
Input Voltage	120-277V, 480V option
Power Factor	>0.90
Surge Protection	4kV
CRI	>=80
CCT (K)	Selectable 3/4/5K
BUG Rating	B2-U3-G2
L70 Lifetime (hrs)	>100,000
Operating Temperature	-40°F to 122°F (-40°C to 50°C)
Listings/Environment	UL, DLC Premium, IP65
Warranty	5 Years warranty. Check maxlite.com/warranties for details

*Default setting 37W, see Lumen Chart for lower wattages

Lumen Chart

	20W	28W
BMD & BMF	2,580-2,720	3,610-3,800
	B1-U3-G1	B2-U3-G1

Dimensions:

Mushroom – Dome & Flat Top

