

PROJECT NAME: _____ CAT. #: _____
NOTES: _____ FIXTURE SCHEDULE: _____

ROUND SILVAIR NETWORK BLE NODES AND SENSORS



NN-RDMSW-SL



NNA-RDMSW-SL



NN-RDW-SL

Overview

c-Max Network Partners features additional networked lighting controls proposition that seamlessly combines MaxLite's broad c-Max controls ready luminaires with other technology partners control systems. This new wireless offering extends MaxLite's c-Max Lighting controls solutions to now include Silvoir's Bluetooth NLC and DLC 5.0 qualified system featuring a globally interoperable lighting controls ecosystem. It features wired plug-in sensors and nodes, including USB-C and auxiliary jack form factors, based on Bluetooth NLC open standards.

Applications

- Industrial
- Warehouses
- Schools
- Commercial

Features

- Luminaire Level Lighting Control (LLLC) enabled with wireless Bluetooth NLC
- Simple "Plug-and-Play" Connection - Easy to install in the field with pre-installed USB-C receptacle in Maxlite Controls Ready luminaires, Auxiliary jack to be used with BPHE3 highbay series
- Easy Commissioning with Silvoir App (Available in iOS and Android)
- Local Bluetooth Network with no gateway needed
- Occupancy/Vacancy and Daylight Harvesting on select models
- Individual Addressability and/or Grouping
- Multi-level dimming: Manual ON/OFF Automatic ON/OFF, and Automatic Partial ON/OFF control capability
- Ability to create scenes for more customized dimming scenarios
- Time clock scheduling for individual lights, groups, or scenes
- High-Trim/Tuning sets the maximum light level based on customer requirements
- Includes locking screw to resist vandalism and withstand vibration (Requires 1.5mm Allen wrench)
- Check <https://www.maxlite.com> for c-Max fixture compatibility
- 5 Year warranty. Check [maxlite.com/warranties](https://www.maxlite.com/warranties) for details

System Highlights

- Designed to support large-scale installations deployed in commercial environments, offers powerful commissioning, fine-tuning, and everyday management features.
- Can add upto 8,000 devices to one project
- Silvoir firmware provides enterprise-level reliability, scalability and security
- DLC NLC5 compliant with technology stack based on open wireless standards - Bluetooth NLC qualified
- Flexible access to data via in-app dashboards or API
 - Occupancy analytics and energy monitoring via Connected Lighting Services dashboard
 - Intuitive API including Occupancy, Scheduling, System monitoring and Remote control
- Intuitive web app and mobile app for easy commissioning and provisioning faster commissioning with Duplicate zone
 - Feature and ability to set zone profiles remotely
- Ability to link zones in an Area, perform OTA firmware updates via mobile app, or add gateway for advanced connected lighting services

Ordering Information

MODEL NUMBER	DESCRIPTION	UPC	ORDER CODE
NN-RDW-SL	SILVAIR NETWORK NODE ROUND, WHITE	767627058547	111149
NN-RDMSW-SL	SILVAIR NETWORK NODE ROUND, PIR MOTION SENSOR/DAYLIGHT HARVESTING, WHITE	767627058554	111150
NNA-RDMSW-SL	SILVAIR NETWORK NODE (AJ) ROUND, PIR MOTION SENSOR/DAYLIGHT HARVESTING, WHITE	767627089763	114110


ROUND SILVAIR NETWORK BLE NODES AND SENSORS

Specifications

	NN-RDMSW-SL	NNA-RDMSW-SL	NN-RDW-SL
BLE Control Node	Yes	Yes	Yes
Daylight Harvesting	Yes	Yes	No
PIR Motion Sensor	Yes	Yes	No
Detection Mode	Occupancy/Vacancy	Occupancy/Vacancy	N/A
Overall Dimensions	2.48" x 2.24" (63mm x 56.8mm)	2.48" x 2.66" (63mm x 67.5mm)	2.48" x 0.98" (63 mm x 25 mm)
Weight	2.14oz (61g)	1.60oz (45g)	1.47oz (42g)
Connector Port	USB-C	Audio Jack 3.5mm	USB-C
Operating Voltage	12-24VDC		
Operating Current	max 15mA		
Sinking Current	max 25mA		
Control Output	Analog 0-10V (Linear)		
Status Indicators	Green (Network Status), Red (Sensor Detection)		
Radio Frequency	2.4GHz ± 75MHz		
Wireless Standard	Bluetooth NLC v2.30+		
Programming	SilvaIR App iOS and Android		
Cyber Security	ioXt Certified		
Mesh Range	Up to 360ft node-to-node and 50ft node-to-device (Commissioning)		
Safety	cULus Listed E511069 Light-emitting-diode Controllers		
FCC	47 CFR Part 15, Subpart C 15.247		
BQB	D066483		
Operating Temperature	-40°F to 130°F / -40°C to 55°C		
IP Rating	IP65		
Color	White		
Warranty	5 Year warranty. Check maxlite.com/warranties for details.		

Dimensions

NN-RDMSW-SL & NNA-RDMSW-SL

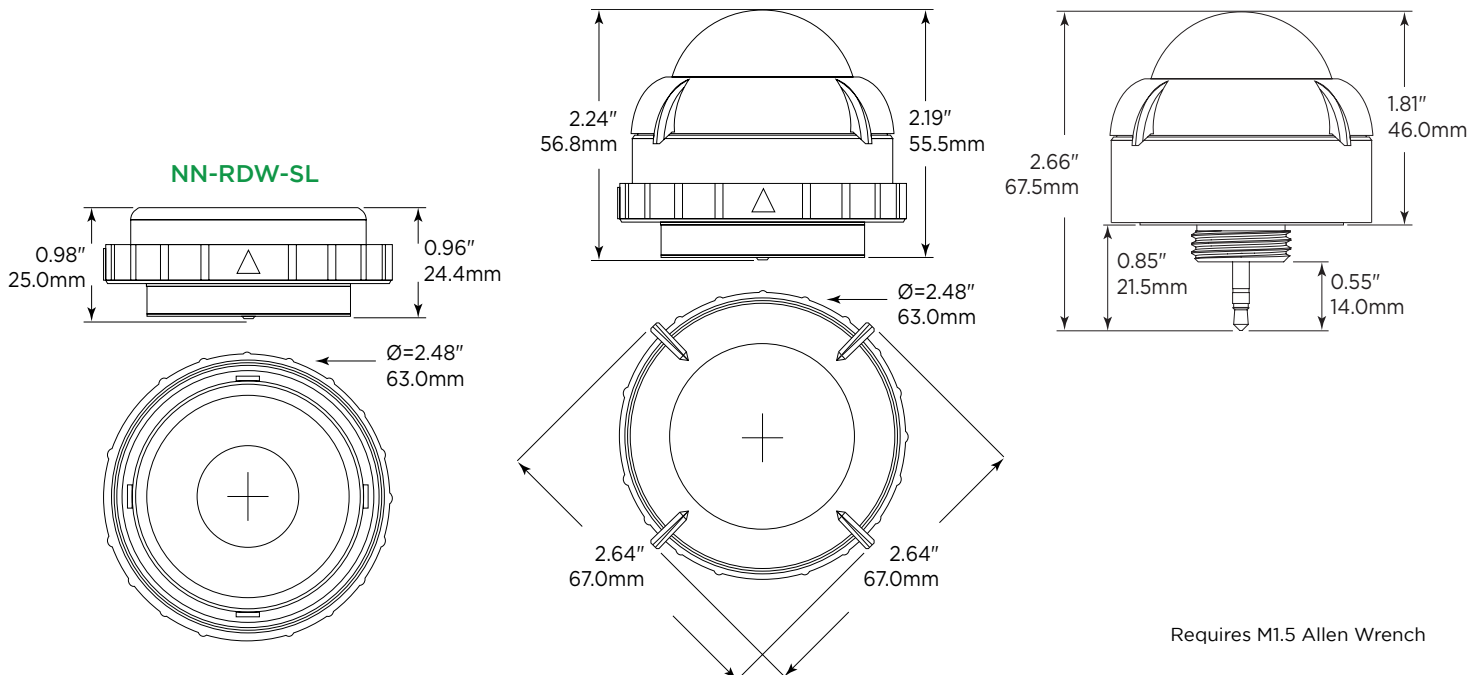


Requires M1.5 Allen Wrench

ROUND SILVAIR NETWORK BLE NODES AND SENSORS

Sensor Detection Coverage

NN-RDMSW-SL & NNA-RDMSW-SL

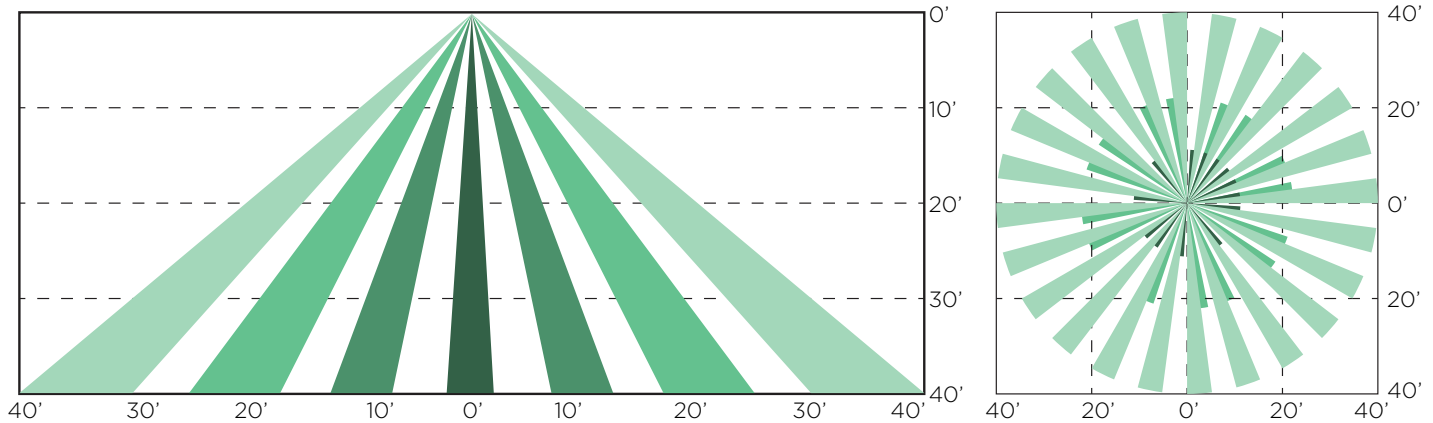

MOUNTING HEIGHT	10ft 3.0m	20 ft 6.0m	30 ft 9.1m	40 ft 12.2m
MAX COVERAGE DIAMETER	20 ft 6.0m	40 ft 12.2m	60 ft 18.3m	80 ft 24.4m

Technology Partner



SILVAIR

Silvaair provides a reliable lighting control technology based on the globally interoperable Bluetooth mesh standard. Whether you are a component manufacturer, a facility manager, or an energy service company, you can easily deploy our solutions to strengthen your competitive advantage and create new revenue streams.

Commissioning tools for installers

Advanced strategies have never been easier

We provide intuitive apps for standard-compliant Bluetooth mesh lighting networks. Designed to support large-scale installations deployed in commercial environments, they offer powerful commissioning, fine-tuning, and everyday management features. The bottom line is faster ROI, shortened path to advanced control strategies, and facilitated compliance with building energy codes.

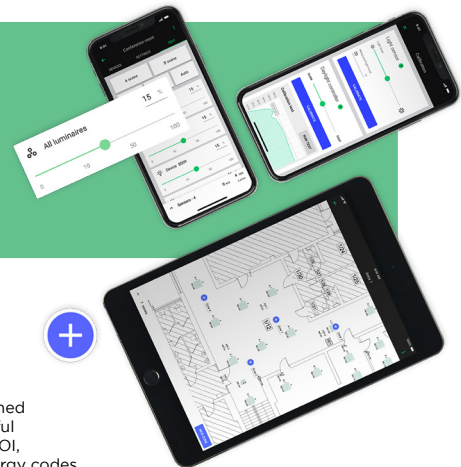

Plan every detail from the comfort of your desk

Silvaair Applications

[Android App](#)

[Web App](#)

[iOS App](#)