



WIRELESS SWITCH



Switch
(1pc included
w/ each Receiver)



WS-600-WH



WS-D100-WH



WARNING

WARNING — THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.

- Before installing any electrical wiring device or equipment, consult the National Electric Code and all appropriate local codes.
- Follow all normally accepted safety standards when installing and wiring this device. If you are replacing an existing switch, be certain the circuit is turned off first.

CAUTION

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

- Avoid installing switch on metal surface, that may seriously affect the operation range.
- Range may vary in different environments.



RECEIVER INFORMATION

1. Range may vary in different environments.
2. The controller is not available to work with air conditioner, pump, or any other appliance (Max Load Stated Above).
3. Be sure which one is live wire before shut down the power and install the controller.

SWITCH INSTALLATION



1. Use the double-sided tape to install.

* Trim plate installation

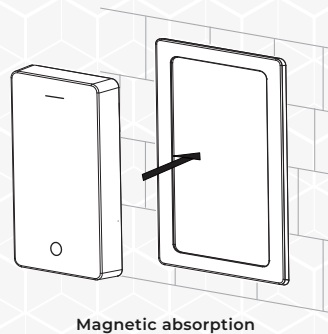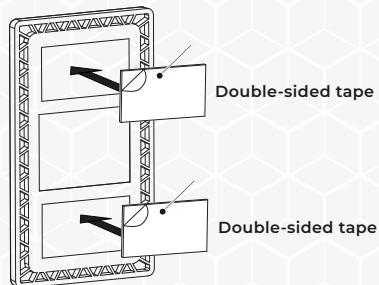

Magnetic absorption

* Trim-less plate (WS-TL-BP) installation

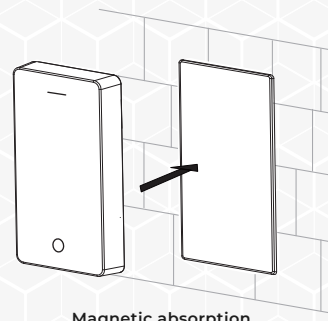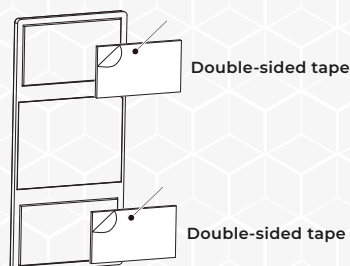

Magnetic absorption

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.




WIRELESS SWITCH



RECEIVER INSTALLATION

1. The controller can be installed in switch box, Junction box or canopy.
2. The controller will not work if connection of input and output wires is wrong.

Before:

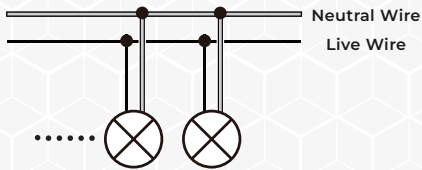

Now:

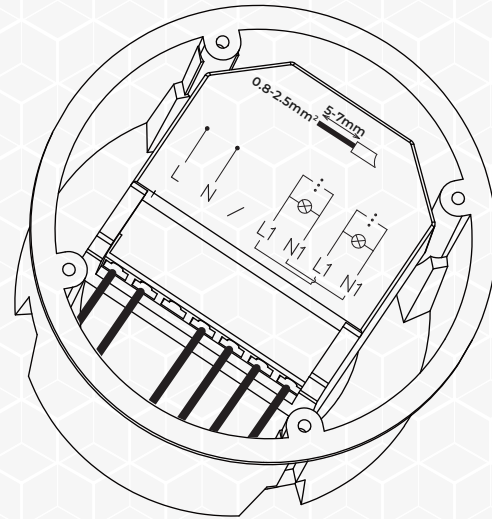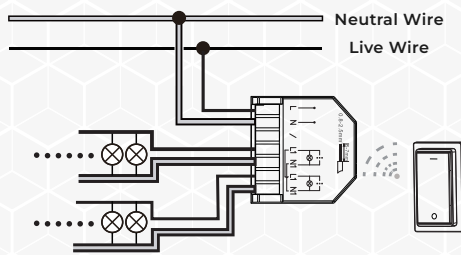


Caution:


1. Max. load level is 600W (WS-600-WH) all together.
2. Max. load level is 100W (WS-D100-WH) all together.

HOW TO PAIR


1. Be sure to pair the switch and receiver before use.




1. Hold 4 seconds.



2. Release once LED turn ON.




3. Press the switch.




4. LED flashes once pairing completed, press it again to exit pairing mode.

HOW TO RESET



1. Turn off the breaker, press the pairing button, and power it on for 4 seconds.



2. LED flashes, reset completed.

HOW TO DIM (applicable to WS-D100-WH)



1. Hold & Press "-" button.



2. See the brightness changing from bright to dim, dim to bright, circle by circle.
3. Release the button when you like the brightness.

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

