

UNIVERSAL SERIES

OD-5034

HIGHLIGHTS

Next Generation Universal Series Fan

- Ultra Silent, High Performance fan for ceiling mounted Hold
- It comes with a Shaded Pole Motor
- **OD-5034H-CONT** = 6pc contractor pack for fan housing only
- **OD-5034M-CONT** = 6pc contractor pack for fan motor assembly only



SPECIFICATIONS

Model	OD-5034
Static Pressure(in inches w.g.)	0.1
Air Volume (CFM)	50
Noise (sones)	3.4
Duct size (inch)	3"
Fan Watts	44.2W
Housing dimension (in)	7-1/2"x7-1/4"x3-5/8"
Grille dimension (in)	8-3/4"x9-1/2"
Voltage	120V/60HZ
Warranty	1 year
Case Quantities	8

Other airflow reference performance based on HVI Procedures 915, 916, and 920.
HVI Certified performance based on HVI Procedures 915, 916, and 920.

HOUSING

- Made of rugged 26 GA galvanized steel
- Detachable 3 inch polymeric collar which includes a light weight built in back draft damper


MOTOR | BLOWER

- Plug in permanently lubricated motor- Engineered for continuous operation
- Motor comes with a built in overload disconnect for safety and longer motor life

TYPICAL SPECIFICATIONS

- Ceiling ventilator shall have corrosion resistance galvanized steel
- It shall be ducted to a roof vent or wall cap using 3 inch round pipe
- Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation
- Includes an attachable non metallic collar with build in back draft damper


DIMENSIONS

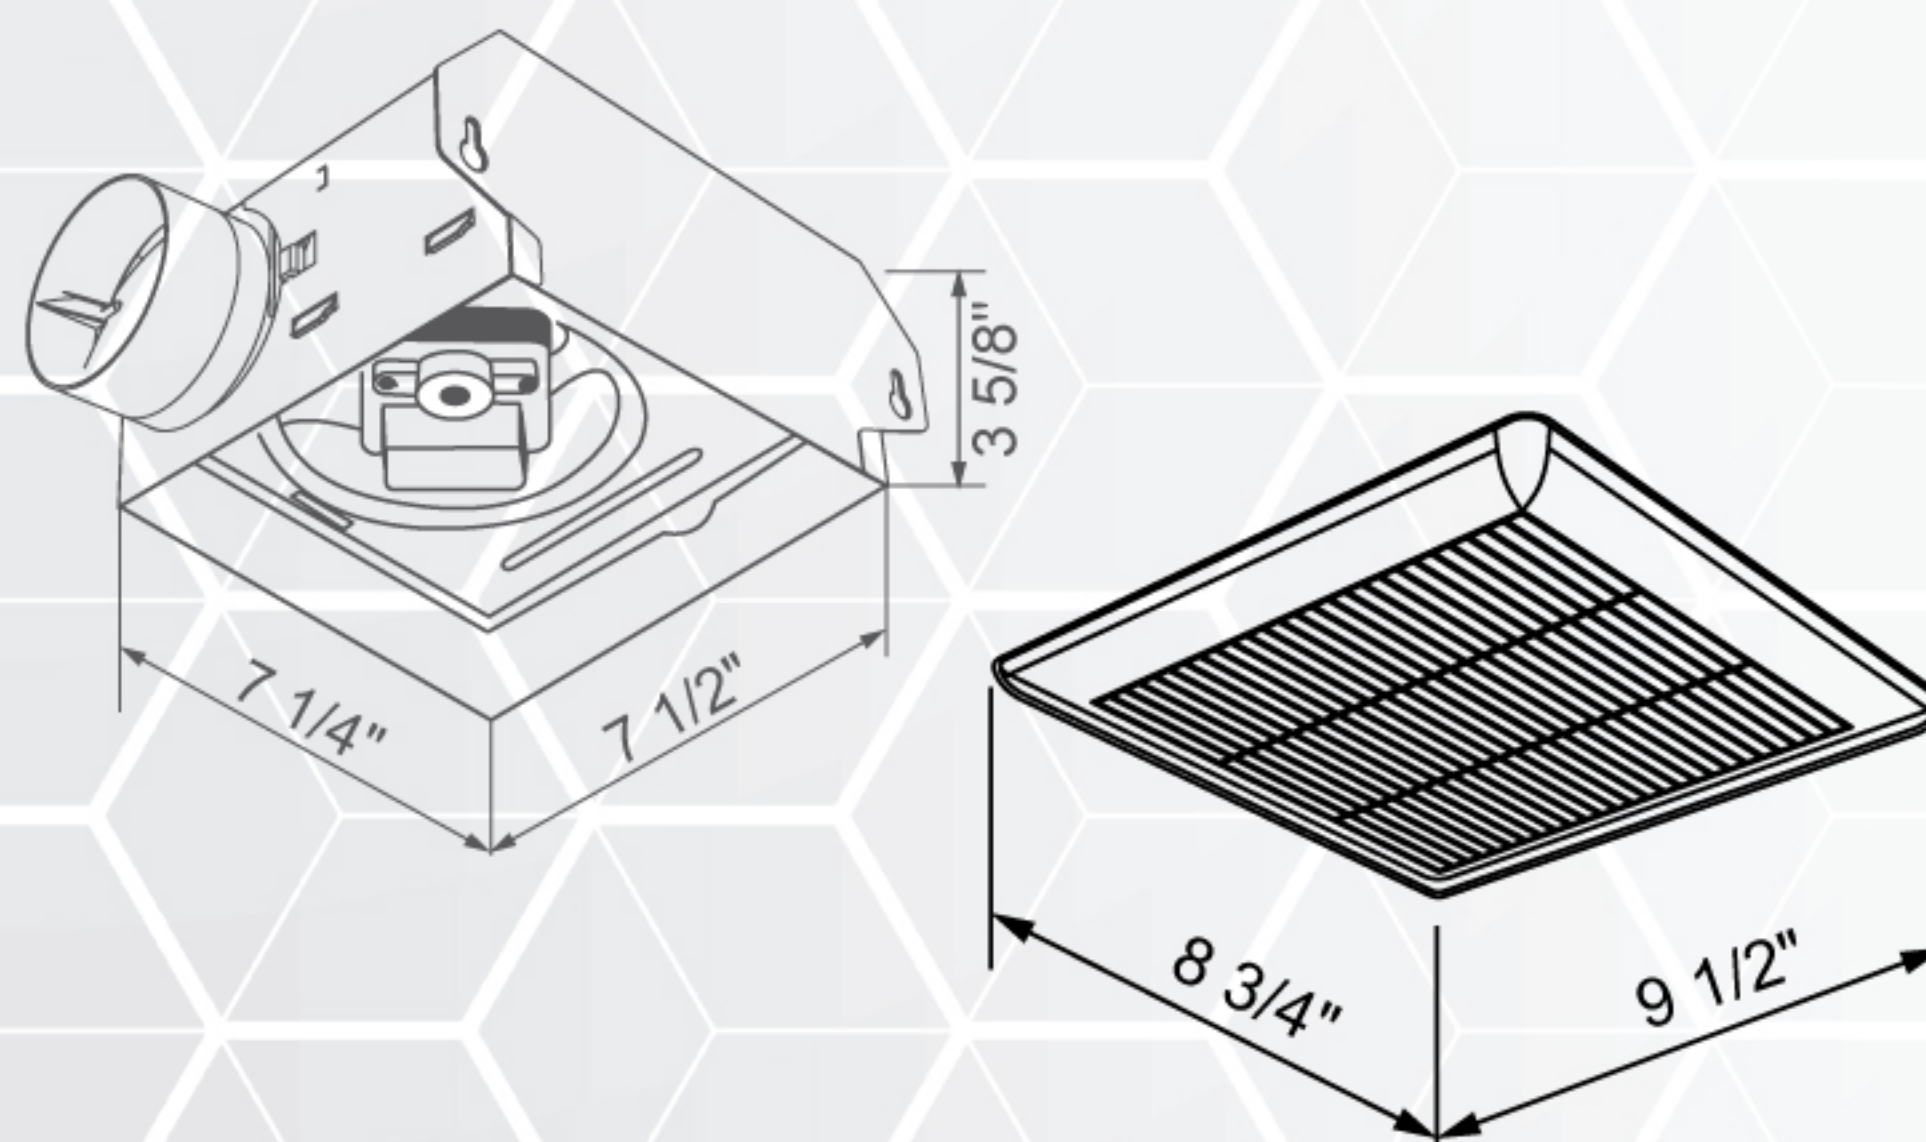

UNIVERSAL SERIES


OD-5034

FAN CURVE

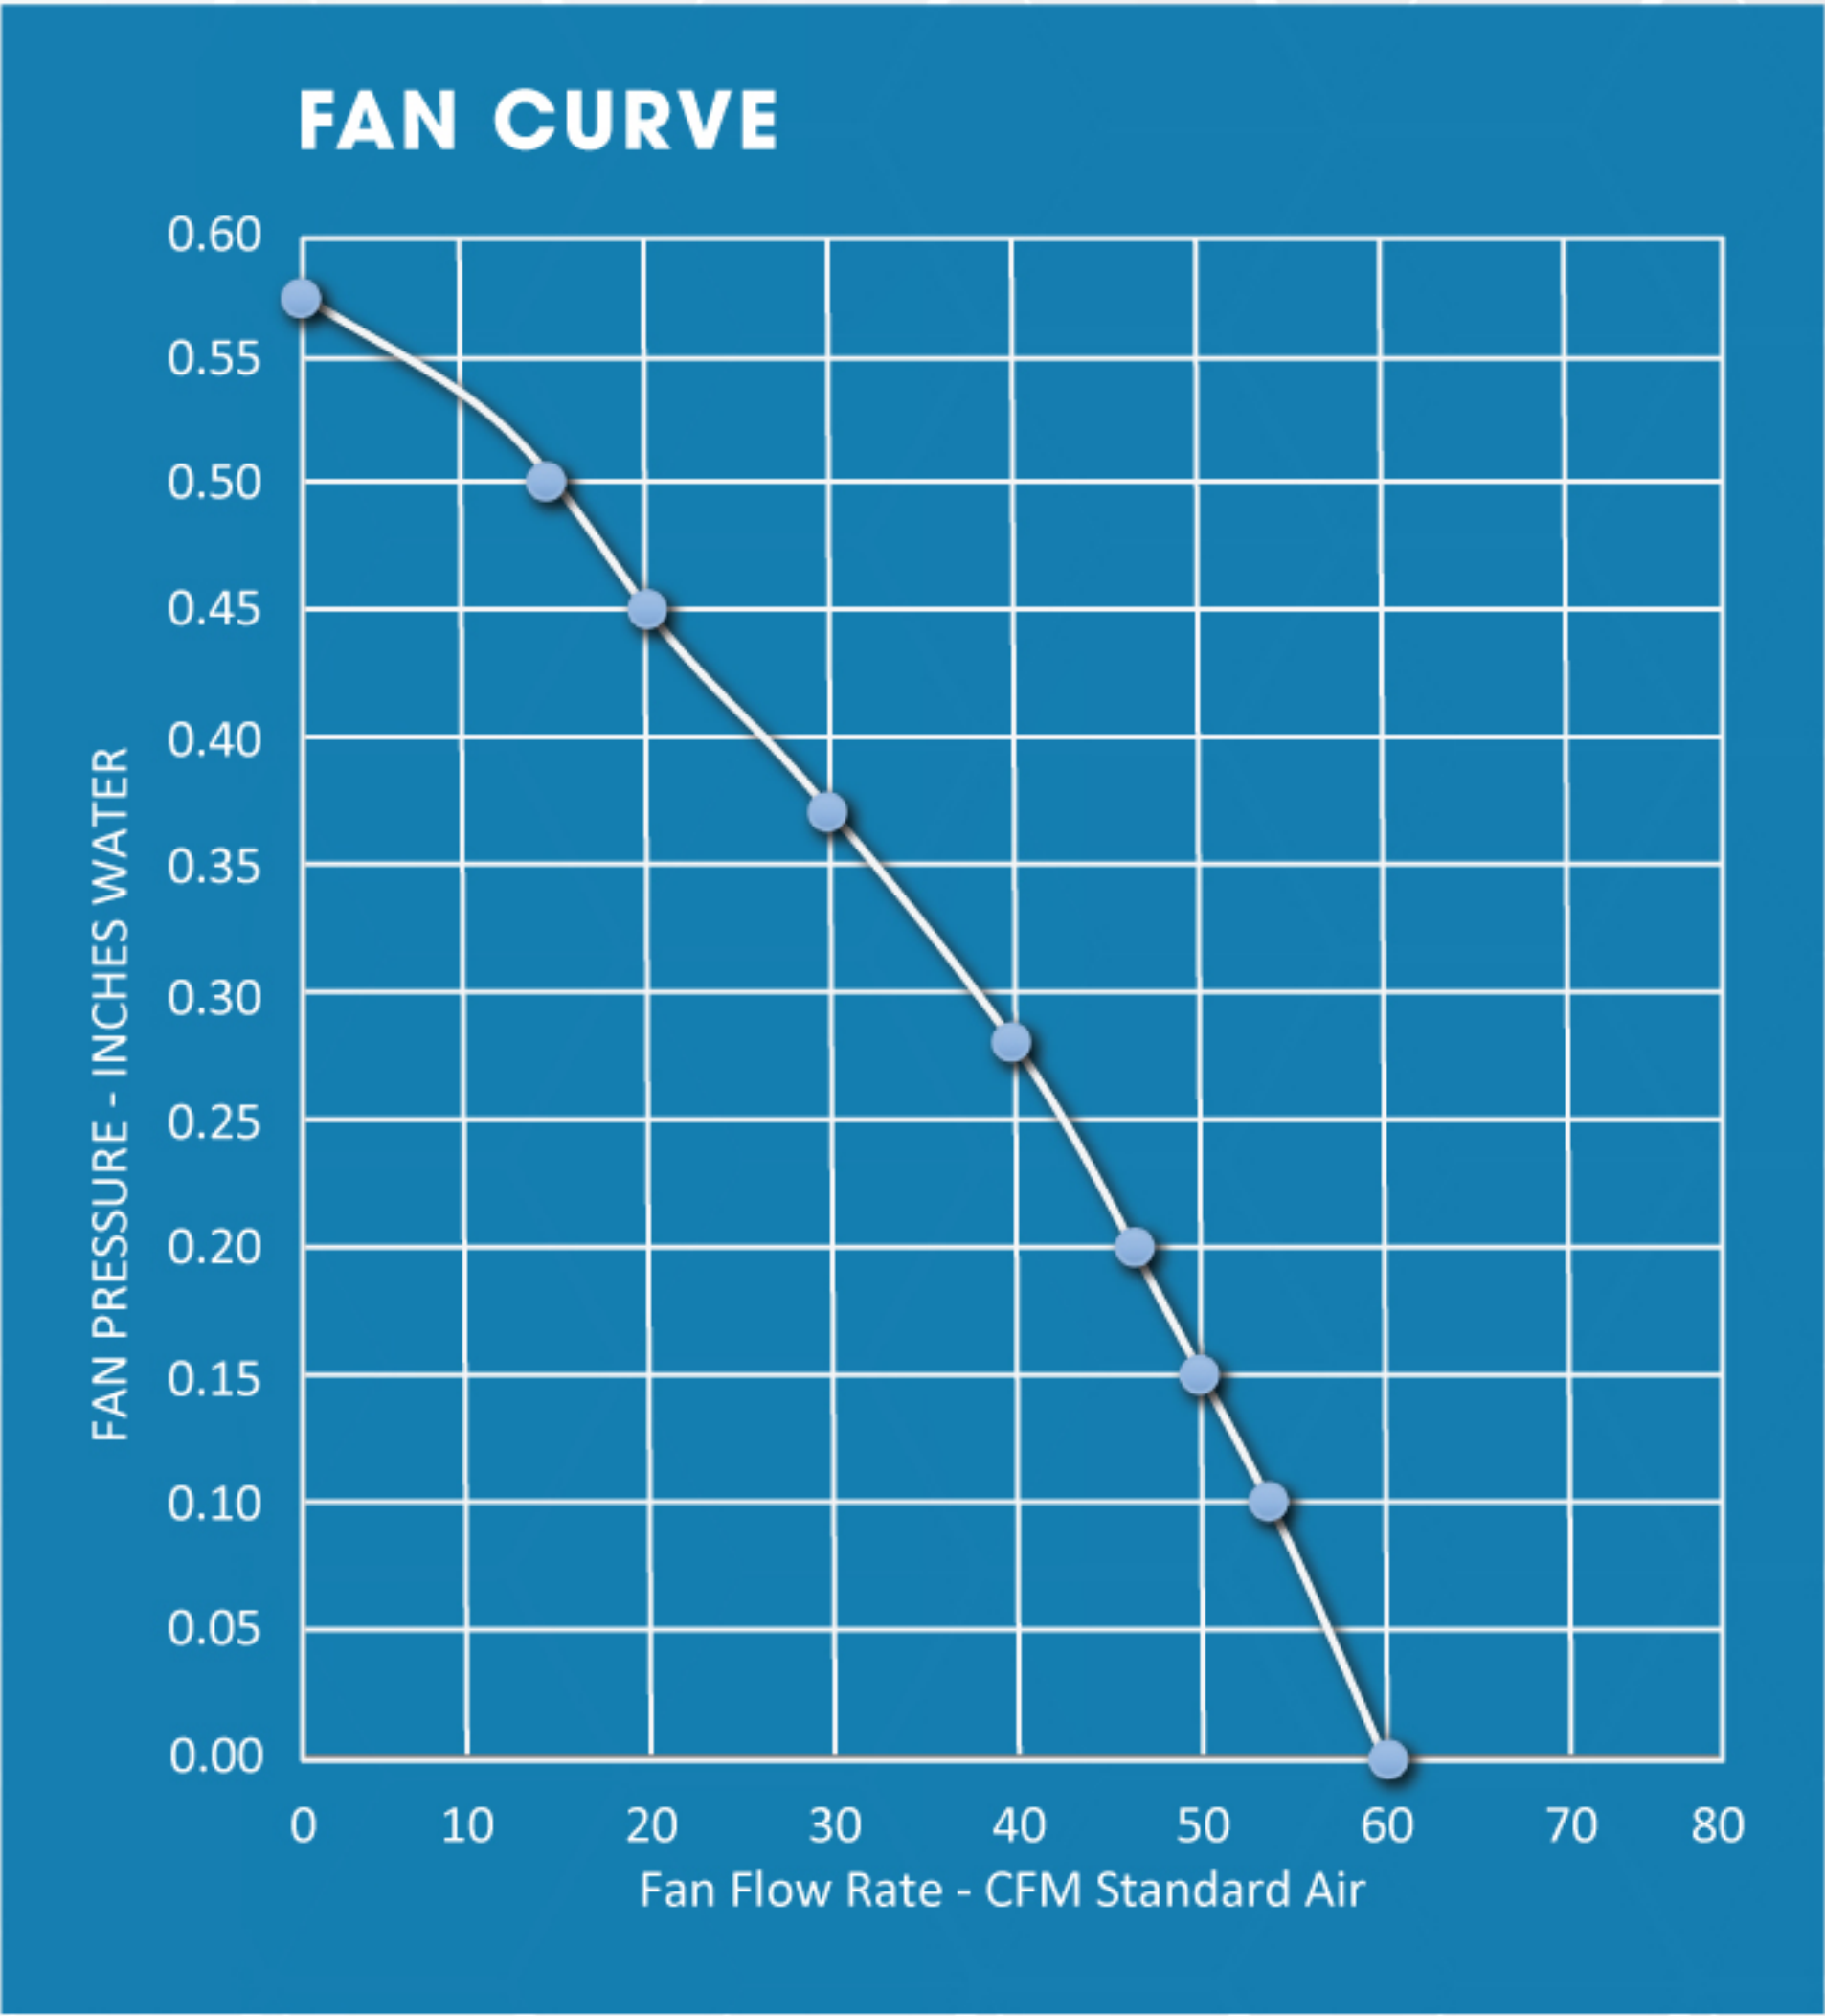


Comes with protective cardboard cover
Warranty is voided if the cardboard is removed anytime during construction.

COMPATIBLE ACCESSORIES (sold separately)

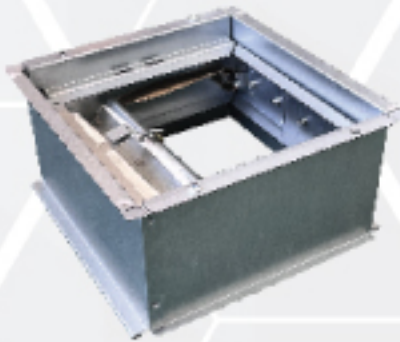

FIRE DAMPER-ODE

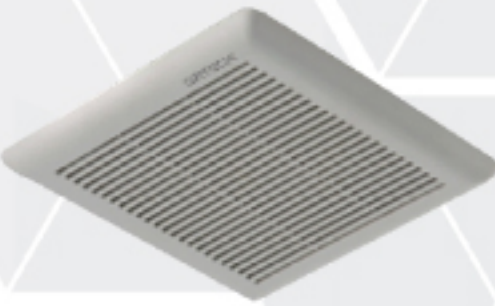

OD-G0809



ODE-G2



ODE-LLG

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.