


4" SLIM LIGHTS

SLIM4BP-DL-5CCT

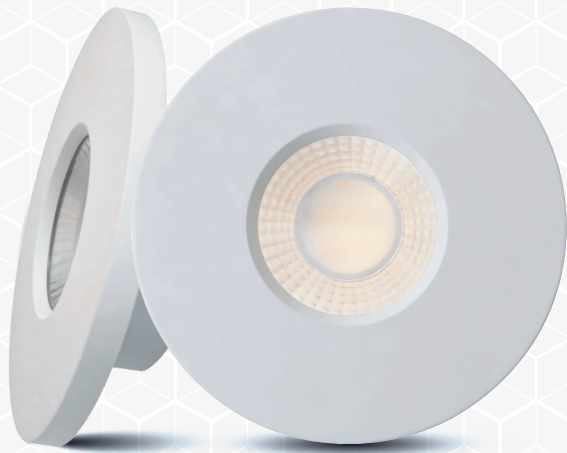

HIGHLIGHTS

4" LED slim downlight with selectable CCT and interchangeable trims

- Installs in most standard 4" junction boxes or 4" recessed housing
- Slim, plastic non-conductive dead-front trim with smooth Convex lens
- Up to 700 lumens delivered
- 5% phase cut LE & TE dimming (120V input) with compatible controls
- Suitable for wet locations
- White finish trim included in box

9W

120V AC

700 LMN


90Ra+ CRI

CERTIFICATIONS



COLOUR TEMPERATURE


2700K / 3000K / 3500K / 4000K / 5000K (Selectable)




SPECIFICATIONS

MODEL	SLIM4BP-DL-5CCT
Wattage	9W
Voltage	120V AC, 60Hz
Lumens	700 lmn
Beam Angle	50°
Lifetime	50,000 hours
Dimmable	Yes (TRIAC dimming)
CRI	90Ra+
Rating	IC rated/Indoor use/ Wet Location
Grade of Protection	IP54
Power Factor	>0.9
Operating Temperature	-20°C ~ +40°C

INSTALLATION





Option 1: Flush Mount
Connect quick connectors. Tuck all wires into J-Box fix the fixture without trim to the J-Box with two screws.



Option 2: Retrofit a Recessed Can
Connect quick connectors. Tuck all wires into recessed can. Squeeze springs and push up into recessed can.

DIMENSIONS

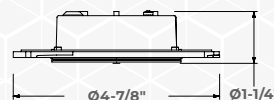

5 YEAR WARRANTY

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.



4" SLIM LIGHTS SLIM4BP-DL-5CCT



TRIMS (SOLD SEPERATELY)



Round Black Trim (SLIM4BP-DL-RINGBK)



RETROFIT KIT



SLIM4BP-DL-RF-KIT



REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

