

## P.V.C. Plastic Insulated Sleeve


# 12-10 WIRE RANGE

.040 Stock


PVC (Butted Seam) terminals and splices feature a rigid Polyvinyl Chloride (PVC) insulation sleeve permanently attached to butted barrel (in #22-10) or (in #22-2). Attaches to wire with one quick crimp. Insulation sleeve prevents vibration damage by not allowing wire flex at point of crimp. Funnel wire entrance into electrical barrel eliminates wire strand "hang-up", increases crimping rates and wire termination reliability\*. Operating Temperature Range: continuous duty from -67°F to 221°F (-55°C to 105°C).

\* Step construction provides ideal locator for proper crimping.

\*\* Temp Rating 75°C

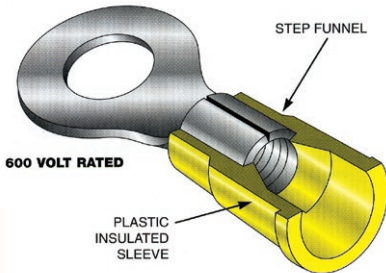

### Copper Stranded Wire Only



For Locking Styles contact Techspan


**Terminals are NOT Actual Size See Sizing Chart on B-38, B-39**

Stud Size Part Number

- 4-6 **R4C6S**
- 4-6 **R4C6**
- 6-8 **R4C8S**
- 6-8 **R4C8**
- 8-10 **R4C10**
- 12-1/4 **R4C14S**
- 1/4-5/16 **R4C56S**
- 1/4-5/16 **R4C56**
- 5/16-3/8 **R4C38**

Stud Size Part Number

- 4-6 **BS4C6**
- 8 **BS4C8**
- 10 **BS4C10**
- 12 **BSF4C10**
- B4C\*\***
- P4C Parallel**



DIMENSIONAL CHART		
Part Number	W	L
B4C		1.069"
BS4C10	0.323"	1.062"
BS4C14	0.356"	0.998"
BS4C6	0.321"	1.051"
BS4C8	0.323"	1.060"
P4C		0.831"
R4C10	0.377"	1.056"
R4C12	0.757"	1.513"
R4C14S	0.531"	1.221"
R4C38	0.589"	1.327"
R4C56	0.589"	1.320"
R4C56S	0.531"	1.224"
R4C6	0.376"	1.056"
R4C6S	0.286"	1.012"
R4C8	0.378"	1.053"
R4C8S	0.284"	1.022"

Terminals accept .250" Max. Wire Ins. Dia.



Add suffix "M" for 1000 pack  
Add suffix "P" for Pro Pack (Quantities vary by Part #)



Approved installation tool: See tool chart pages E-2,3,4  
Economy installation tools: RAT-PVC, 453, HTS1000  
See pages E-2 to E-4 for installation tools.