



Innovation & Quality

www.votatec.ca

12" Slim Flush Mount

5WAY CCT Adjustable / 120-347V


Project : \_\_\_\_\_

Type : \_\_\_\_\_

Drawn by : \_\_\_\_\_

Catalogue No. : \_\_\_\_\_

Date : \_\_\_\_\_

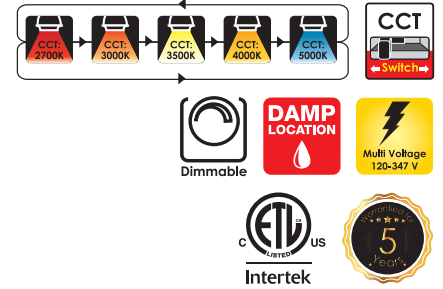

## Specifications

Model No.		□ P6112-K248-N347W5T-W1
General	Size	12"
	Watts	24 W
	HID Equivalent	160W
	Lumen	2100LM
	CCT	2700/3000K/3500K/4000K/5000K Adj
	Volts	AC120-347V
	CRI	>80
	Beam Angle	120degree
	Hours Rated	50000 hours
	Min Compartment Size	φ11.8"×0.71"
Electrical	Operating Frequency	50/60Hz
	Power Factor	>0.9
	Operating Position	Both Horizontal&Vertical
	Surge Protection	External surge protection-1KV
	Operating Temperature	-20°C(-4°F) TO 45°C(113°F)
Physical	Lens Material	Plastic
	Housing Color	White
	Weight (Kg)	1.00
Additional Information	Additional Info	CCT adjustable
	Rated For Enclosed Fixture	Yes
	Warranty	5 years
Compliance	Safety Listing	cETLus-Listed
	Location Rating	Damp
	Energy Star	No
	DLC Approved	No




## Features & Specifications

<b>Construction</b>	<ul style="list-style-type: none"> <li>• Ultra-modern slim edge-lit design makes any room architecturally pleasing</li> <li>• External driver, Flicker free</li> <li>• Good Quality LGP &amp; diffuser Plate</li> <li>• Stable design for the whole structure</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Easy installation for remodel or new construction application</li> </ul>
<b>Performance Data</b>	<ul style="list-style-type: none"> <li>• Available in 2700K/3000K/3500K/4000/5000K Selectable color temperature</li> <li>• 80+CRI</li> <li>• Electrical ratings:120-347V</li> <li>• Estimated life of over 50000 hours to L70</li> <li>• 120-347V dimming driver with this luminaire</li> <li>• 1KV surge protection (standard)</li> <li>• Operating temperature: -20°C(-4°F) TO 45°C(113°F)</li> <li>• Dimmable fixture will operate smoothly with most residential dimmers from a 100% brightness to a low of 10% of the original light intensity</li> </ul>
<b>Compliances</b>	<ul style="list-style-type: none"> <li>• cETLus certified for damp locations</li> </ul>

## Dimensions & Weights

Model	P6112-K248-N347W5T-W1
Diameter in. (mm)	11.8" (300mm)
Height in. (mm)	0.71" (18mm)
Net weight (lbs)	2.2

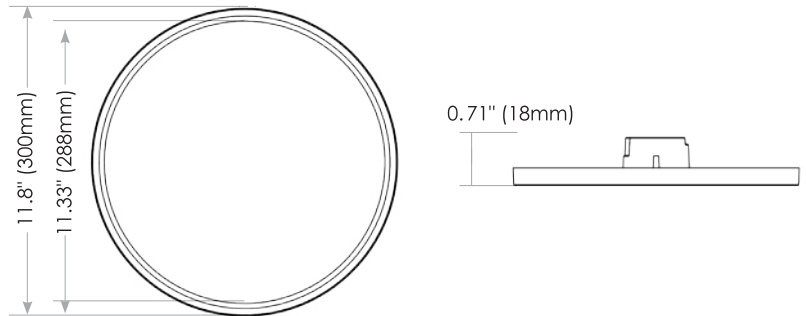




### Product Details

- Change CCT with accessible switches

2700/3000/3500/4000/5000K Adj




• PC lens

• PC Housing



### Accessories



Part	Description	Quantity
BB	Mounting Bracket	1
GG	Screws	3
HH	Wire connectors	3



**NOTE :** All included inside the box

### Lumen Details

Model No.:	Watts (W)	2700K		3000K		3500K		4000K		5000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
P6112-K248-N347W5T-W1	24W	2274LM	94	2413LM	102	2464LM	100	2446LM	102	2303LM	96



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

