



# Whole Home Bulb RGBWW

Product Specifications



TCP's Whole Home Bulb provides a smart lighting solution that will fit any application. Choose from hundreds of different saturated and beautiful colors from the RGB spectrum or select a bright white light from 2700K to 6500K. Pair with the new SmartStuff application to take control of your home.

## Reasons to choose the Whole Home Bulb RGBWW from TCP

- Hundreds of vibrant colors on the RGB spectrum to choose from
- Tunable bright white light between 2700K and 6500K
- Easily change the look of your A-Lamps with the touch of a button when paired with the SmartStuff application
- Dims from 1% to 100%
- Long-life minimizes replacement and maintenance costs
- LED high efficiency allows for less energy consumption compared to non-LED alternatives
- Bluetooth® connection allows for connectivity without adding devices to your Wi-Fi network

## Ideal Applications

- Commercial
- Residential
- Retail
- Table and Floor lamps
- Ceiling fixtures
- Indoors or outdoors

## Specifications

Voltage ..... 120V  
Input Line Frequency..... 50/60Hz  
Lamp Life (Rated) ..... 25,000 hours  
Minimum Starting Temp ..... -22°F  
Maximum Operating Temp..... 140°F

Dimmable ..... Yes  
Warranty ..... 5 Years  
Connection Type..... Bluetooth  
Suitable for use in totally enclosed fixtures

## Specifications




9.5W  
A19

ITEM #	DESCRIPTION	WATTS	LUMENS	COLOR TEMP	INCAND. EQUIV	DIM	LAMP TYPE	BASE	MIN STARTING TEMP	Voltage	MOL	DIA
<b>A19 Lamps – Dimmable • 25,000 Hours</b>												
5MA19RGBWWBT	Smart A19 RGBWW 27K-65K BT	9.5W	800	2700K-6500K	60W	DIM	A19	E26	-22F/-30C	120	4.3"	2.4"

### PAIR DEVICES TO THE TCP SMARTSTUFF APPLICATION:

1. Place SmartStuff Lamps into pairing mode by powering them on and off 5 times with a half second pause in between each cycle.  
\*\*\*Lamps will pulse bright to dim when in pairing mode.\*\*\*
2. Open the application and select the orange plus icon in the upper right corner.
3. Select "Add Device" from the menu.
4. If the Lamps are in pairing mode, they will be automatically detected at the top of the screen.
5. Once detected, select "Add".
6. Select the blue plus icon next to the Lamps you wish to pair.
7. After loading, you can rename Lamps by selecting the pencil icon.
8. Select "Done" in the upper right corner to finish pairing.

Customize the color, brightness and more for each light using the TCP SmartStuff App.

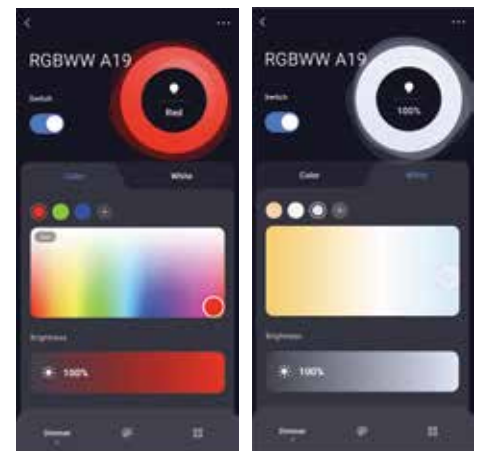

Scan the QR Code to download the application today.



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by TCP is under license.

# TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 30 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit [tcp.com](http://tcp.com)

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516