


Pedestal Installation Manual

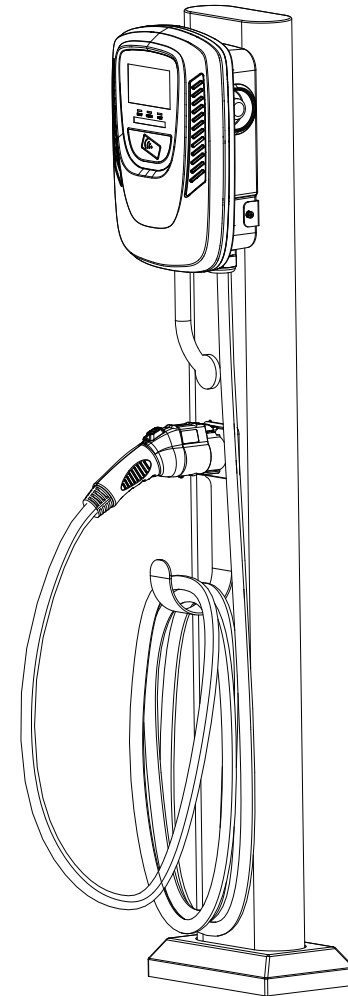

Single Pedestal only

WARNING

Safety instructions

Not observing the safety instructions can result in risk of death, injuries and damage to the device! The producer assumes no liability for claims resulting from this!

Electrical hazard!

- The installation, commissioning and maintenance of the charging station may only be performed by correctly trained, qualified and authorized electricians who are fully responsible for the compliance with existing standards and installation regulations. Observe the instructions given for selecting the location and the constructional requirements!
- If the specifications for the location are not observed, this can result in death, serious physical injury or equipment damage if the corresponding precautionary measures are not met!
- The back-to-back pedestal must always be fitted with two charging stations!

Use of this manual

This installation manual is intended for qualified personnel only.The information and instructions in the manual about selecting the location, installation and connection of the charging station must be adhered to.



Packing list

No.	Description	Single Version Qty (pcs)	Back-to-back Version Qty (pcs)
1	Pedestal	1	1
2	Base Cover (Optional)	1	1
3	Connector Base & Hook	1	2
4	M5*22mm Screw	6	10
5	Special Screwdriver (Optional)	1	1
6	Cable Gland	1	2
7	M8*100mm Expansion Screw	4	4
8	M8*16mm Screw	6	10
9	Installation Manual	1	1

Remark: For Europe market, the screw is M6*25mm for the connector base and hook.


Making drill holes

- Mark the 4 holes on the concrete foundation using the base-plate of the pedestal. Make sure that the connection cable is located precisely underneath the opening in the base-plate.
- Drill the 4 mounting holes: Diameter 10mm; mimum depth 84mm.
- Hammer the anchors (not included) so that they are flush with the floor.

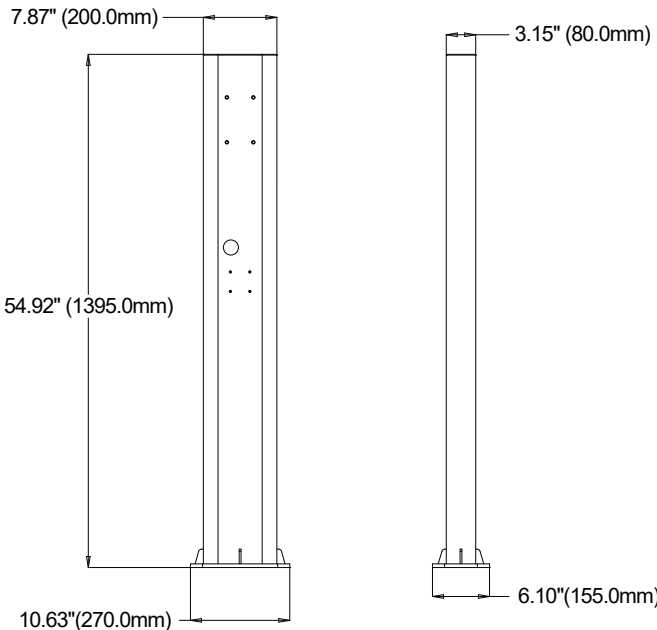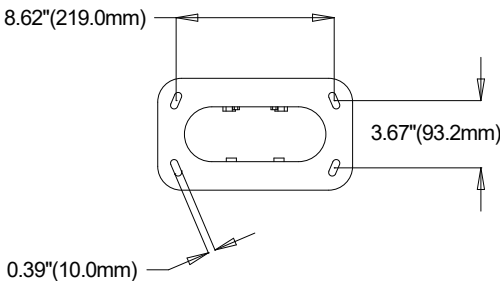

Thread in cable

- Thread the connection cables from the bottom through the pedestal upwards through the cable opening.




Anchoring

- Position the pedestal directly over the cable outlet.
- Anchor the pedestal to the foundation using 4 sets of M8*100mm expansion screws (flat washer, spring washer and bolt were included).
- Release the 4pcs of M5*12mm screws of the wiring window at the back.
- Cap the base cover down carefully.




Base Cover

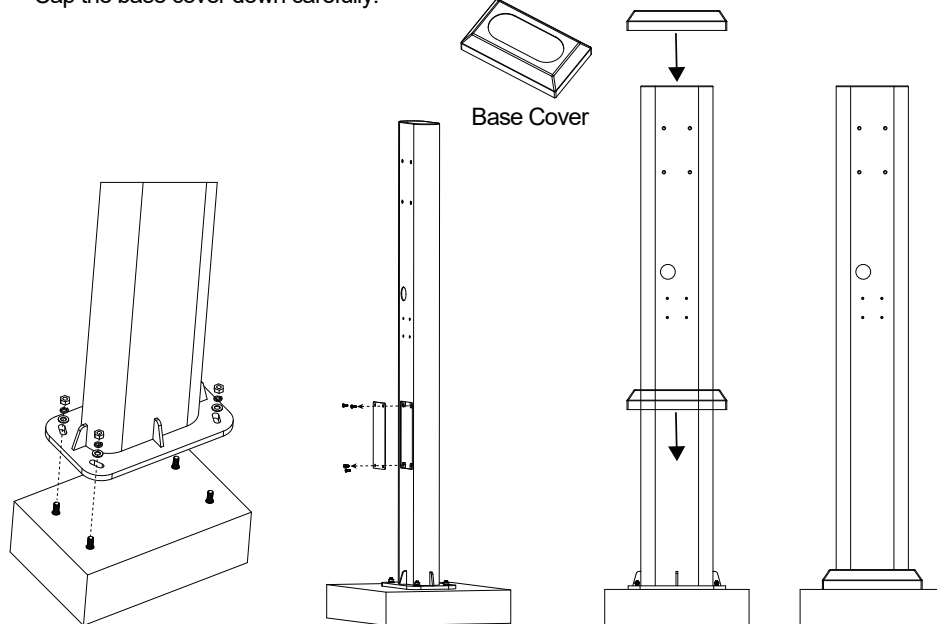

Bracket installation

- Insert one cable gland to the pedestal for single pedestal properly.
- Take off the wall-mounted bracket of the charger, and fix it in the corresponding position on the pedestal with 4 pcs of M8*16mm screws for single pedestal.
- Repeat one more time on the back for Back-to-back version.

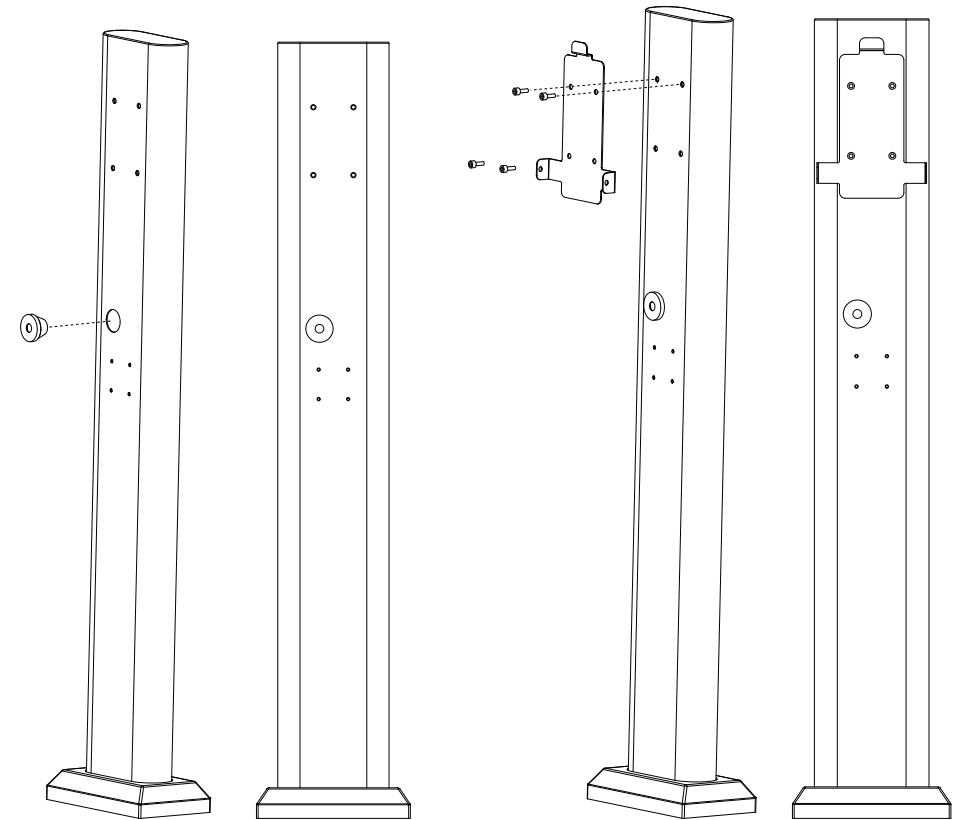

Connector base & Hook installation


- NA Version:

Use 4pcs of M5*22mm screws to fix the connector base and hook in the corresponding position.

- EU Version:

Use 4pcs of M6*25mm screws to fix the connector base and hook in the corresponding position.

- Repeat one more time on the back for Back-to-back version.

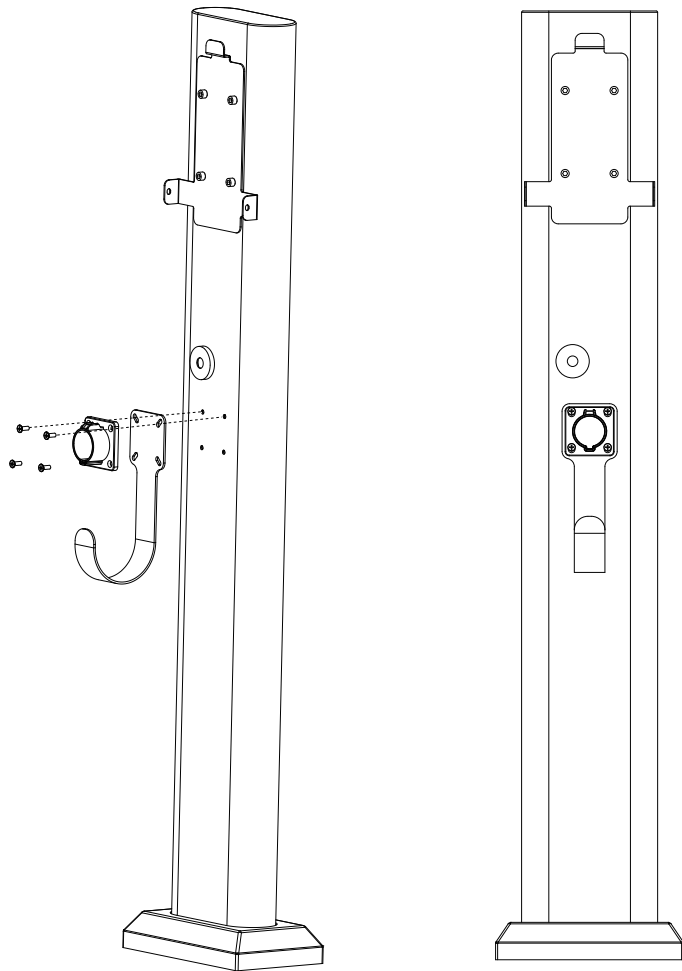

Mounting the charging station

- Mount the charging stations on the pedestal using 2pcs of M5*12mm screws on two sides of the charger. (Repeat one more time on the back for Back-to-back version.)

Connecting

- Thread the connection cables from the bottom through the pedestal upwards through the wiring window.
- Perform the electrical connection and commissioning in accordance with the instructions in the "User manual" of charging station.
- Fix the 4pcs M5*12mm screws to finish the installation.

