

# Kellems® Wire Management Products Overhead DUA-PULL® Pulling Grips

Flexible Eye, Double Weave Mesh, Galvanized Steel




### WARNING!

It is important that you read all breaking strength, safety and technical data relating to this product on pages T-17 through T-27.

### DUA-PULL Grips

DUA-PULL Pulling Grips are the highest strength pulling grips manufactured for overhead transmission line stringing applications. They have a dual function, not provided by any other grip, of working with both bare and insulated conductors and synthetic rope.

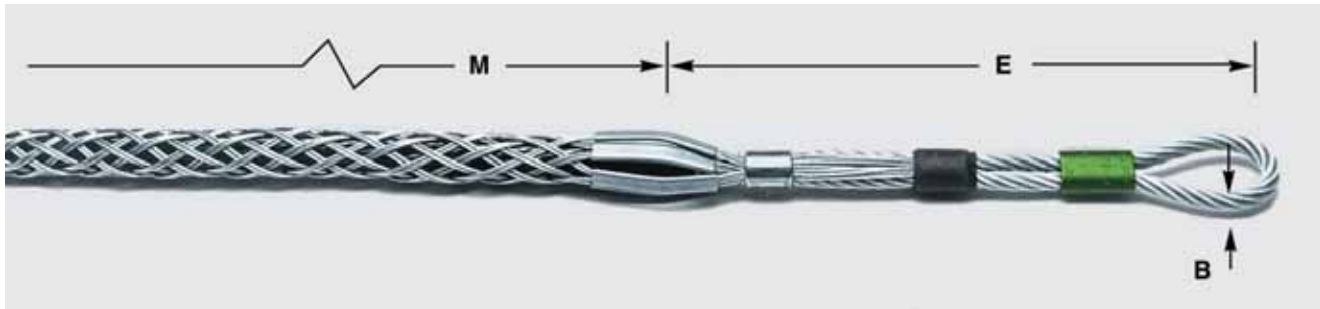

### DUA-PULL Grips

Diameter Range		Approx. Breaking Strength Lbs. (N)	E In. (cm)	M In. (cm)	Eye B Diameter In. (cm)	Diameter Over Cable & Grip** In. (cm)	Color Code	Catalog Numbers
Conductor Diameter Inches (cm)	Rope* Diameter Inches (cm)							
.19"-.37" (.48-.94)	.25"-.65" (.63-1.65)	6,500 (28,912)	10" (25.40)	24" (60.96)	.220" (.56)	.200" (.51)	Black	033271037
.38"-.62" (.97-1.57)	.50"-.90" (1.27-2.29)	14,000 (62,272)	12" (30.48)	36" (91.44)	.375" (.95)	.280" (.71)	Dk Green	033271038
.63"-.87" (1.60-2.21)	.75"-.1.10" (1.90-2.79)	20,000 (88,960)	13" (33.02)	48" (121.92)	.437" (1.11)	.360" (.91)	Red	033271039
.88"-.1.12" (2.24-2.84)	1.00"-.1.50" (2.54-3.81)	30,600 (136,109)	15" (38.10)	60" (152.40)	.500" (1.27)	.500" (1.27)	Dk Blue	033271040
1.13"-.1.37" (2.87-3.48)	1.25"-.1.70" (3.17-4.32)	46,800 (208,166)	18" (45.72)	76" (193.04)	.625" (1.59)	.625" (1.59)	Yellow	033271041
1.38"-.1.90" (3.51-4.38)	1.50"-.2.10" (3.81-5.33)	66,500 (295,792)	24" (60.96)	89" (226.06)	.750" (1.90)	.750" (1.90)	Alum.	033271042

E- Eye length M-Mesh length at nominal diameter

\*For rope, select smallest size grip which meets required work load.

\*\*Add to cable or rope diameter.



### DUA-PULL Feed Tube

For Use With DUA-PULL Grip	Rope Diameter Inches (cm)	Feed Tube Length Inches (cm)	Catalog Numbers
033271037	.25"-.65" (.63-1.65)	28" (71.12)	091061043
033271038	.50"-.90" (1.27-2.29)	40" (101.60)	091061044
033271039	.75"-.1.10" (1.90-2.79)	52" (132.08)	091061045
033271040	1.00"-.1.50" (2.54-3.81)	67" (170.18)	091061046
033271041	1.25"-.1.70" (3.17-4.32)	83" (210.82)	091061047
033271042	1.50"-.2.10" (3.81-5.33)	96" (243.84)	091061048

