


16R30-UO

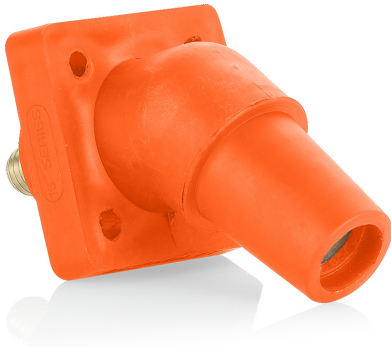

Female Receptacle, 45-Degree, #2 - 4/0 AWG, 0.75" Threaded Stud Length Termination

16 Series Female Panel Receptacle, Cam-Type, 45- Degree, Threaded Stud, Taper Nose, Cable Range- #2 to 4/0 AWG, 400 Amp Max, Orange

ROHS Compliant : Yes

Leviton's Rhino-Hide Single Pole Cam-Type Connectors supply temporary electrical power for both indoor and outdoor applications. These devices are designed for easy assembly and disassembly, without special tools.


- Single or double set screw or crimp tube termination
- NEMA 3R rated for outdoor use when mated
- Designed with cylindrical profile to reduce snap
- UL: 1691, 508 – 35k A / 600V Short Circuit Current Rating
- Color-coding provides fast and easy phase identification
- Common applications: entertainment, oil and gas, mining operations, power distribution, construction sites, and other temporary power applications

Color :  Orange

UPC Code : 078477759196

Country Of Origin : Mexico

Available Colors :

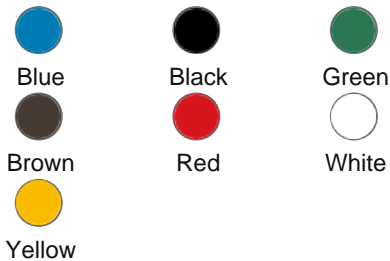

Technical Information

Electrical Specifications

Max. Amperage : 400 Amp

Max. Voltage : 600 Volt

Mechanical Specifications

Cable Range : 2-4/0 AWG

Connection Type : Threaded Stud

Gender : Female

Standards and Certifications

CSA Standard : 1691

NEMA Rating : Type 3R

UL : 1691, 508 – 35k A / 600V Short Circuit Current Rating

Material Specifications

Contacts : Brass

Strain Relief : Copper Wire

Product Features

Color : Orange

SPECIFICATION SUBMITTAL

<p>JOB NAME:</p> <input style="width: 90%; height: 20px;" type="text"/> <p>JOB NUMBER:</p> <input style="width: 90%; height: 20px;" type="text"/>	<p>CATALOG NUMBERS:</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border: 1px solid black; height: 20px;"></td> <td style="width: 50%; border: 1px solid black; height: 20px;"></td> </tr> <tr> <td style="width: 50%; border: 1px solid black; height: 20px;"></td> <td style="width: 50%; border: 1px solid black; height: 20px;"></td> </tr> </table>				

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)
5386- 1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without
notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts

© 2024 Leviton Manufacturing Co., Inc.